

DIRIS A-30/A-41

Multifunction measuring unit - PMD

measurement and advanced monitoring - door mounting



DIRIS A-30

diris_984_front.eps



DIRIS A-41

diris_956.psd

The solution for

- Healthcare
- Energy
- Industry

Strong points

- Easy to use
- Detects wiring errors
- Customisable
- Compliant with IEC 61557-12

Conformité aux normes

- IEC 61557-12
- IEC 62053-22
Class 0.5 S
- IEC 62053-23
Class 2
- UL



Compatible with

- Current sensors and transducer:



RGW sensors & RAC-1A integrator


RGW flexible current sensors with RAC 1A integrator: up to 5000A, choice of 6 diameters, ideal for existing installations.

Function

The DIRIS A-30 and A-41 are power monitoring device that provides the user with all of the measurements needed to complete energy efficiency projects and to assure the monitoring of electrical distribution.

All the information can be used and analysed remotely using energy efficiency software packages.

Functional diagram

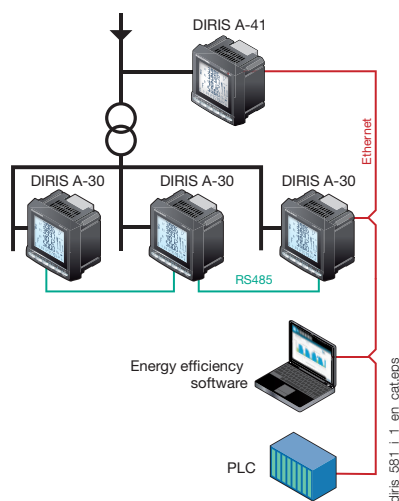

Advantages

Easy to use

With its large backlit multiple-display screen with 6 hot keys, the DIRIS A-30 and A-41 are easy to use.

Detects wiring errors

The DIRIS A-30 and A-41 are provided with a correction function for CT wiring errors.

Customisable

The DIRIS A-30 and A-41 can be equipped with additional modules that give the user flexibility throughout the service life of the product. Communication modules and additional digital or analogue inputs/outputs can be used to increase its range of functionality.

Compliant with IEC 61557-12

Reference standard for PMDs (Performance metering & monitoring devices), IEC 61557-12 guarantees performance levels and satisfactory performance from the PMDs under the environmental conditions typical of industrial and service applications.

Functions

Multi-measurement

- Currents
 - instantaneous: I1, I2, I3, In, Isystem
 - average/max average: I1, I2, I3, In
- Voltages & frequency
 - instantaneous: V1, V2, V3, U12, U23, U31, F, Vsystem, Ussystem
 - average/max average: V1, V2, V3, U12, U23, U31, F
- Powers
 - instantaneous: 3P, ΣP, 3Q, ΣQ, 3S, ΣS
 - max average: ΣP, ΣQ, ΣS
 - predictive: (ΣP), (ΣQ), (ΣS)
- Power factors
 - instantaneous: 3PF, ΣPF
 - average/max average: ΣPF

- Kfactor
- Temperatures⁽¹⁾
 - internal
 - external via 3 PT100 probes

Metering

- Active energy: +/- kWh
- Reactive energy: +/- kvarh
- Effective power: kWAh
- Hours: ⌚

Harmonic analysis

- Level of harmonic distortion
- Currents: thd I1, thd I2, thd I3, thd In
- Phase-to-neutral voltage: thd V1, thd V2, thd V3
- Phase-to-phase voltage: thd U12, thd U23, thd U31

- Individual harmonics up to 63rd
- Currents: HI1, HI2, HI3, HIn
- Phase-to-neutral voltage: HV1, HV2, HV3,
- Phase-to-phase voltages: HU12, HU23, HU31
- Load curve⁽¹⁾
 - Active & reactive power: ΣP+/-; ΣQ+/-
 - Voltages & frequency: V1, V2, V3, U12, U23, U31, F
- Events⁽¹⁾
 - Alarms on all electrical parameters.

Communications⁽¹⁾

- RS485 (Modbus)
- Ethernet (Modbus/TCP or Modbus RTU)
- Ethernet with RS485 Modbus RTU gateway over TCP
- Profibus DP Sub-D9

Inputs/ Outputs⁽¹⁾

- Pulse counting
- Checking / control of equipment
- Alarm report
- Pulse report

Analogue output

- Analogue 0/4- 20 mA

⁽¹⁾ Available as an option (see following pages).


Front panel




1. Backlit LCD display
2. Pushbutton for currents and for connection correction function
3. Pushbutton for voltages and frequency..
4. Pushbutton for active, reactive and effective powers and for power factor.
5. Pushbutton for maximum and average values for currents and power levels.
6. Pushbutton for harmonics.
7. Pushbutton for electrical energy meters, timers and impulse counters

Plug-in modules

DIRIS® A-30



DIRIS® A-41*



* With current measurement module for Neutral as standard.



Pulse outputs

2 configurable pulse outputs (type, weight and run) on \pm kWh, \pm kvarh and kVAh.



MODBUS® communication

RS485 link with MODBUS® protocol (speed up to 38400 baud).



PROFIBUS® DP communication

SUB-D9 link with PROFIBUS® DP protocol (speed up to 12 Mbaud).



Analogue outputs

You can connect a maximum of 2 modules, i.e. 4 analogue outputs.

2 outputs can be allocated to:

3I, In, 3V, 3U, F, \pm Σ P, \pm Σ Q, Σ S, Σ PFL/C, Isys, Vsys, Usys, Ppred, Qpred, Spred, T°C internal, T°C 1, T°C 2, T°C3 and to 30 VDC power supply.



2 inputs - 2 outputs

You can connect a maximum of 3 modules, i.e. 6 inputs / 6 outputs.

2 outputs can be allocated to:

- monitoring: 3I, In, 3V, 3U, F, \pm Σ P, \pm Σ Q, Σ S, Σ PFL/C, THD 3I, THD In, THD 3V, THD 3U, Ppred, Qpred, Spred, T°C internal, T°C 1, T°C2, T°C3 and of time counter,
- remote control,
- timed remote control,
- 2 inputs for pulse counting.



Storage capability

- Memory function up to max. 62 days for P+, P-, Q+, Q- with a TOP for internal or external synchronisation of 5, 8, 10, 15, 20, 30 and 60 minutes.
- Memory function for the last 10 timed and dated alarms.
- Memory function for the last min and max instantaneous values for 3U, 3V, 3I, In, F, Σ P \pm , Σ Q \pm , Σ S, THD 3U, THD 3V, THD, 3U, THD, 3V, THD, 3I, THD In.
- Memory function of average values 3U, 3V et F as a function of synchronisation (maximum 60 days).



Ethernet communication

- Ethernet link with MODBUS/TCP or MODBUS RTU over TCP.



Ethernet communication with RS485 MODBUS gateway

- Ethernet link with MODBUS/TCP or MODBUS RTU over TCP.
- Connect 1 to 247 RS485 MODBUS slaves.

DIRIS A-30/A-41


Multifunction measuring unit - PMD

measurement and advanced monitoring - door mounting

Accessories

Current transformer

See "Current transformers" pages.

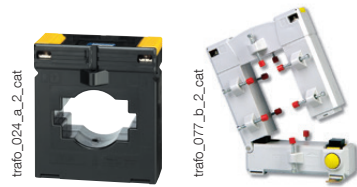

Rogowski sensors




IP65 protection



Terminals


DIRIS A-30

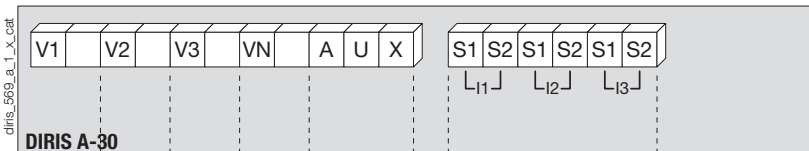

S1 - S2: current inputs

AUX: auxiliary power supplies U_s
V1 - V2 - V3 - VN: voltage inputs


DIRIS A-41

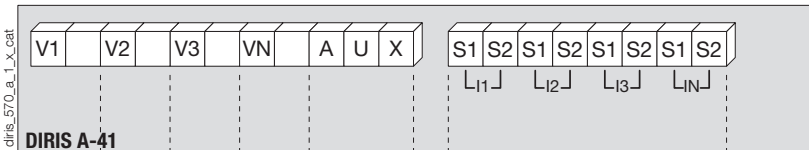

S1 - S2: current inputs

AUX: auxiliary power supplies U_s
V1 - V2 - V3 - VN: voltage inputs


Communication module



RS485 link.

R = 120 Ω : internal resistance for the RS485 link.


Pulse output module



1 - 2: pulse output n°1.

3 - 4: relay output n°2.


Analogue output module



5 - 6: analogue output n°1.

7 - 8: analogue output n°2.

2 input / 2 output module




9 - 10: relay output n°1.

11 - 12: relay output n°2.

13 - 14: optical input n°1.


15 - 16: optical input n°2.

Memory module




17 - 18: synchronisation input.

Temperature module

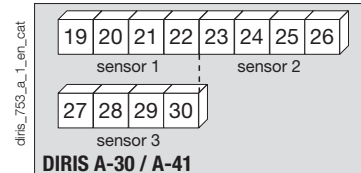


| Probe 1 | Probe 2 | Probe 3 |
|-----------|-----------|-----------|
| 19: red | 23: red | 27: red |
| 20: red | 24: red | 28: red |
| 21: white | 25: white | 29: white |
| 22: white | 26: white | 30: white |

Ethernet module



Ethernet module + RS485 MODBUS gateway

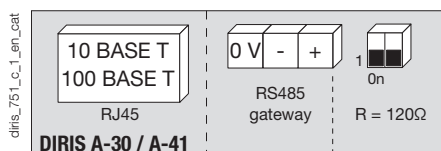

Electrical characteristics


| Measurement of currents on insulated inputs (TRMS) | |
|--|---------------------------------|
| Via CT primary | 9,999 A |
| Via CT secondary | 1 or 5 A |
| Measurement range | 0 ... 11 kA |
| Input consumption | ≤ 0,1 VA |
| Measurement updating period | 1 s |
| Accuracy | 0.2% |
| Permanent overload | 6 A |
| Intermittent overload | 10 I _n for 1 s |
| Voltage measurements (TRMS) | |
| Direct measurement between phases | 50 to 1039 VAC |
| Direct measurement between phase and neutral | 28 to 600 VAC |
| VT primary measurement | 500,000 VAC |
| VT secondary measurement | 60, 100, 110, 173, 190 VAC |
| Frequency | 50 / 60 Hz |
| Input consumption | ≤ 0,1 VA |
| Measurement updating period | 1 s |
| Accuracy | 0.2% |
| Current - voltage product | |
| Limitation for TC 1 A | 10,000,000 |
| Limitation for TC 5 A | 10,000,000 |
| Power measurement | |
| Measurement updating period | 1 s |
| Accuracy | 0.5% |
| Power factor measurement | |
| Measurement updating period | 1 s |
| Accuracy | 0.5% |
| Frequency measurement | |
| Measurement range | 45 ... 65 Hz |
| Measurement updating period | 1 s |
| Accuracy | 0.1% |
| Energy accuracy | |
| Active (according to IEC 62053-22) | Class 0.5 S |
| Reactive (according to IEC 62053-23) | Class 2 |
| Auxiliary power supply | |
| Alternative voltage | 110 ... 400 VAC |
| AC tolerance | ± 10 % |
| Direct current | 120 ... 350 VDC / 12 ... 48 VDC |
| DC tolerance | ± 20 % / - 6 ... + 20 % |
| Frequency | 50 / 60 Hz |
| Power consumption | ≤ 10 VA |

| Module 2 inputs - 2 outputs: outputs (alarms / control) | |
|---|---------------------------------|
| Number of relays | 2 ⁽¹⁾ |
| Type | 250 VAC - 5 A - 1150 VA |
| Module 2 inputs - 2 outputs: optical coupler inputs | |
| Number | 2 ⁽¹⁾ |
| Power supply | 10 ... 30 VDC |
| Minimum width of signal | 10 ms |
| Minimum length between 2 pulses | 18 ms |
| Type | Optical couplers |
| Pulse output module | |
| Number of relays | 2 |
| Type | 100 VDC - 0.5 A - 10 VA |
| Max. number of manoeuvres | ≤ 10 ⁸ |
| Analogue output module | |
| Number of outputs | 2 ⁽²⁾ |
| Type | Insulated |
| Scale | 0 / 4 ... 20 mA |
| Load resistance | 600 Ω |
| Maximum current | 30 mA |
| MODBUS communication module | |
| Link | RS485 |
| Type | 2 to 3 half duplex wires |
| Protocol | MODBUS [®] RTU |
| MODBUS [®] speed | 4800 to 38400 baud |
| PROFIBUS DP communication module | |
| Link | SUB-D9 |
| Protocol | PROFIBUS [®] DP |
| PROFIBUS [®] speed | 9.8 kbaud ... 12 Mbaud |
| Ethernet communication module | |
| Connection technology | RJ45 |
| Baud rate | 10 base T / 100 base T |
| Protocol | MODBUS TCP or MODBUS RTU on TCP |
| Temperature module (inputs) | |
| Type | PT100 |
| Connection | 2, 3 or 4 wires |
| Dynamic | - 20°C ... 150°C |
| Accuracy | ± 1 digit |
| Maximum length | 300 cm |
| Operating conditions | |
| Operating temperature range | -10 to +55°C |
| Storage temperature | -20 to 85°C |
| Relative humidity | 95% |

(1) Max. 3 modules / DIRIS.

(2) Max. 2 modules / DIRIS.

Case

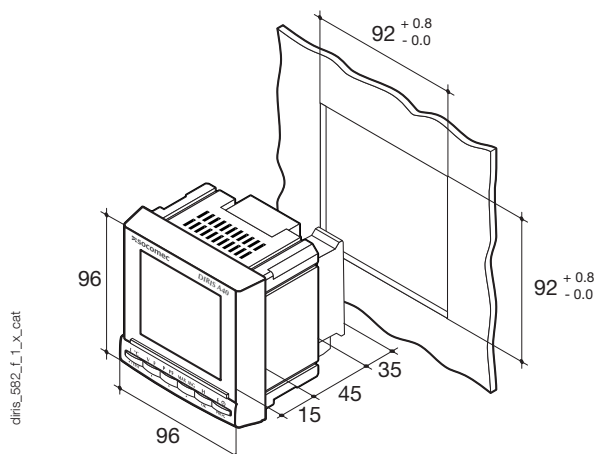

| | |
|--|-----------------------------|
| Type | Panel mounting |
| Dimensions W x H x D | 96 x 96 x 60 mm |
| Case degree of protection | IP30 |
| Front degree of protection | IP52 |
| Display type | Backlit LCD display |
| Type of terminal strips | Fixed or detachable |
| Section of connection for voltages and other terminals | 0,2 ... 2.5 mm ² |
| Section of connection for currents | 0.5 ... 6 mm ² |
| Weight | 400 g |

DIRIS A-30/A-41

Multifunction measuring unit - PMD


measurement and advanced monitoring - door mounting

Connections

Balanced low-voltage network for DIRIS A-30


Recommendation: When disconnecting the DIRIS, the secondary of each current transformer must be short-circuited. This operation can be carried out automatically by a SOCOMEC PTI, which can be found in the SOCOMEC catalogue: please consult us. In TNC mode, it is advisable to connect the DIRIS A-30/A-41 to earth using the functional earth module.

3/4 wires with 1 CT

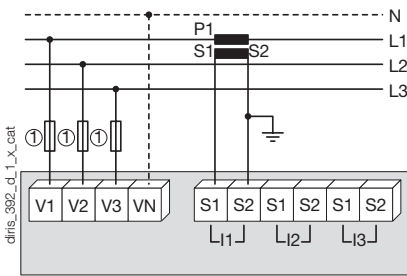


The use of 1 TC reduces by 0.5% the accuracy of the phases, the current for which is worked out by vector calculation.
1. 0.5 A gG / 0.5 A class CC fuses.

Single-phase

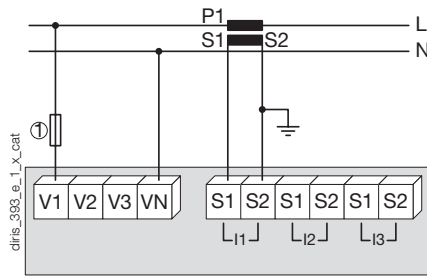

1. 0.5 A gG / 0.5 A class CC fuses.


Two-phase

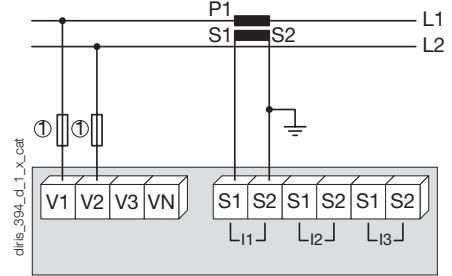

1. 0.5 A gG / 0.5 A class CC fuses.


Balanced low-voltage network for DIRIS A-30

3/4 wires with 3 CTs

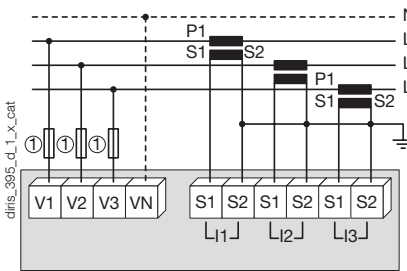


1. 0.5 A gG / 0.5 A class CC fuses.

3 wires with 2 CTs

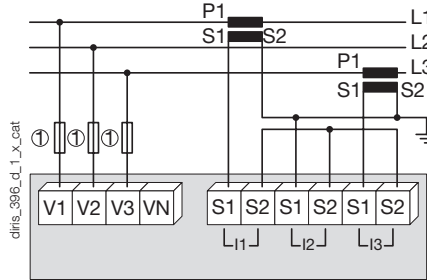

The use of 2 TC reduces by 0.5% the accuracy of the phase, the current for which is worked out by vector calculation.
1. 0.5 A gG / 0.5 A class CC fuses.


3 wires with 2 CTs

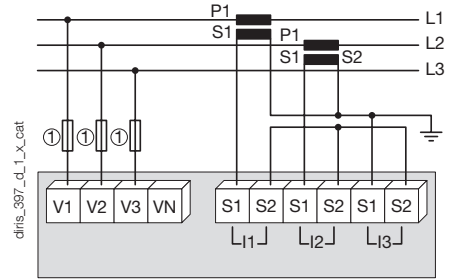

The use of 2 TC reduces by 0.5% the accuracy of the phase, the current for which is worked out by vector calculation.
1. 0.5 A gG / 0.5 A class CC fuses.

Balanced low-voltage network for DIRIS A-41


4 wires with 4 CTs

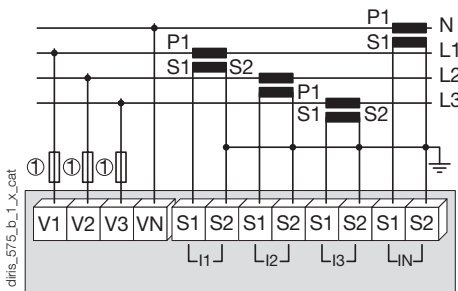


1. 0.5 A gG / 0.5 A class CC fuses.

Additional information


Communication via RS485 link

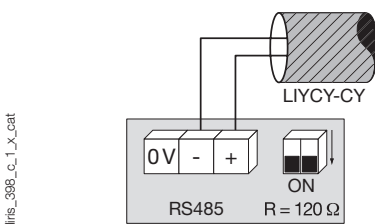

Connection of potential transformer for HV networks

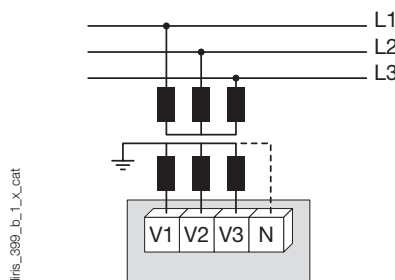

AC and DC auxiliary power supply



1. 0.5 A gG / 0.5 A class CC fuses.

References

| Basic device | DIRIS A-30 | | DIRIS A-41 With CT on the neutral |
|---|------------------|--|--------------------------------------|
| Auxiliary power supply U_s | Reference | | Reference |
| 110 ... 400 VAC / 120 ... 350 VDC | 4825 0403 | | 4825 0404 |
| 12 ... 48 VDC | 4825 0405 | | 4825 0406 |

| Options | | | |
|---|------------------|--|------------------|
| Plug-in modules⁽¹⁾ | Reference | | Reference |
| Pulse outputs | 4825 0090 | | 4825 0090 |
| RS485 MODBUS [®] communication | 4825 0092 | | 4825 0092 |
| PROFIBUS [®] DP communication | 4825 0205 | | 4825 0205 |
| Analogue outputs | 4825 0093 | | 4825 0093 |
| 2 inputs - 2 outputs | 4825 0094 | | 4825 0094 |
| Storage capability | 4825 0097 | | 4825 0097 |
| Ethernet communication ⁽²⁾ | 4825 0203 | | 4825 0203 |
| Ethernet communication + RS485 gateway ⁽²⁾ | 4825 0204 | | 4825 0204 |
| Temperature inputs. | 4825 0206 | | 4825 0206 |

(1) Ease of integration of additional functions (maximum 4 slots on A-30 and 3 on A-41).

(2) Dimensions: 2 slots.

| Accessories | To be ordered in multiples of | Reference | To be ordered in multiples of | Reference |
|---|----------------------------------|-------------------------------------|----------------------------------|-------------------------------------|
| IP65 protection. | 1 | 4825 0089 | 1 | 4825 0089 |
| Integration kit for 144 x 96 mm cutout | 1 | 4825 0088 | 1 | 4825 0088 |
| Fuse holders to protect voltage inputs (type RM) 3 pole | 4 | 5701 0018 | 4 | 5701 0018 |
| Fuse holders to protect the auxiliary power supply (type RM) 1 pole + neutral | 6 | 5701 0017 | 6 | 5701 0017 |
| gG 10x38 0.5 A fuses | 10 | 6012 0000 | 10 | 6012 0000 |
| Range of current transformers | 1 | See "Current transformers" pages | 1 | See "Current transformers" pages |
| Ferrite for use with communication modules | 1 | 4899 0011 | | 4899 0011 |
| PT100 temperature probe, M6 screw | 1 | 4825 0208 | 1 | 4825 0208 |
| PT100 temperature probe, M6 lug | 1 | 4825 0209 | 1 | 4825 0209 |
| Associated DIRIS software | | See "Easy Config System" pages | | |
| Automatic CT short-circuiting device | | See "Current transformers" pages | | |

Expert Services



To constantly ensure a functional, accurate and reliable energy monitoring system, Socomec offers a wide range of services:

- Integration of units
- System audits
- Start-up
- Staff training

What's more, ideal for ISO 50001 sites (regular checks):

- Verification of 3% measurement consistency
- Verification of 0.2% measurement precision

To find out more, ask your Socomec representative.