

XUK2LA•SMM12R/T Laser Through-beam sensor

XUK2LAKSMM12T

XUK2LAPSMM12R

ECOLAB

CE

UK
CA

cULUS

Thru-beam




<https://tesensors.com/global/en/document/S1B75481>

Scan the Qr-code to access this Instruction Sheet in different languages or you can download it from our website at: www.tesensors.com

We welcome your comments about this document. You can reach us through the customer support page on your local website.


Mounting and Tightening torques

XUK2LAPSMM12R
XUK2LAKSMM12T




A < 1,5 Nm (13 lb-in)
B < 1 Nm (8,85 lb-in)

LEDs and Setting





Output State LED (Yellow) (1)

Power ON LED (Green)





(1): If Double flash = Contamination

Dimensions

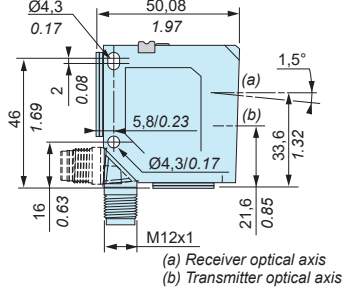

Wiring diagrams

M12 Connector

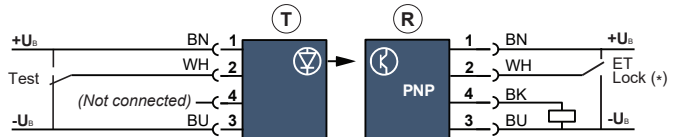

Transmitter control input:
Test → +U_b = Test (transmitter OFF)
Test → -U_b or not connected = Normal operation


(*) see page 2/2 section D

BN	Brown
WH	White
BK	Black
BU	Blue


Wiring precautions
Use certified CYJV or R/C CYJV2 cable assemblies

Detection curves

Excess Gain

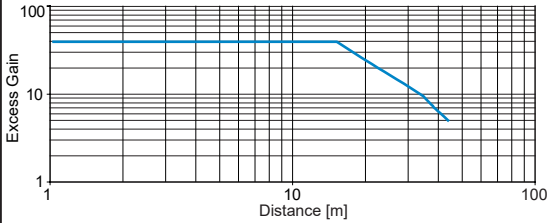

Light beam diameter

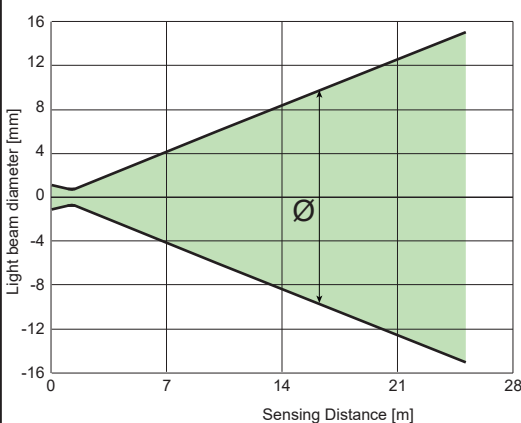

Characteristics

Certification	CE - UKCA - cULus - Ecolab
Maximum sensing distance	30 m / 98.42 ft
Scanning range	0...25 m / 0...82.02 ft
Sensing distance setting	Teach button or control input ET / Lock
Color of detection light beam	Laser class 1, red, 655 nm
Spot size of the light beam	see "Light beam diameter" curve
Wavelength	λ = 655 nm
Puls duration	t = 0.7 μs
Frequency	f = 70 kHz
Limit of radiant power pulse	Pp = 4.5 mW
Output type	PNP (N.O. or N.C.)
Current consumption	≤ 30 mA
Switching capacity	≤ 100 mA
Switching frequency	≤ 3500 Hz
First-up delay	300 ms max.
Response time	0,14 ms max.
Recovery time	0,14 ms max.
Ambient Temperature	Operating : - 20...+60 °C (-4...+140 °F) Storage : - 20...+80 °C (-4...+176 °F)
Power Voltage	Rated operational voltage: 12...24 Vdc Ripple p-p 10% maximum Operating range: 10...30 Vdc (including ripple)
Product Protection	Power supply : Reverse polarity protection Output: Short circuit protection
Degree of protection	IP67 conforming to EN/IEC 60529 IP69K conforming to DIN 40050
Vibration resistance	Frequency range: 10 Hz to 55 Hz Acceleration: 7 gn
Shock resistance	Peak acceleration: 30 gn Duration of the pulse: 11 ms
Permitted cable length	100 m / 328.1 ft
Material	Housing: ABS/PC, Lens: PMMA
Factory setting	max. scanning distance and N.O.

WARNING

UNINTENDED EQUIPMENT OPERATION

- Comply with the wiring and configuration instructions.
- Clean the lens regularly, taking care not to scratch it.
- Check the connections and fixings during maintenance operations.

Failure to follow these instructions can result in death, serious injury or equipment damage.

CAUTION

HAZARD OF LASER RADIATION EXPOSURE

- Do not stare into the beam.
- Do not operate below - 20°C (- 4°F)
- Follow all operating instructions.

Failure to follow these instructions can result in injury or equipment damage.




CLASS 1 LASER PRODUCT (DIN EN 60825-1)
Complies with 21 CFR 1040.10 and 1040.11
except for deviations pursuant to laser Notice No. 50 dated June 24, 2007

Electrical equipment should be installed, operated and maintained only by qualified personnel.
No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.



© 2022 Schneider Electric. "All Rights Reserved."

Adjustment and setting

By button or control input.
Factory setting = max. scanning distance




Legend:

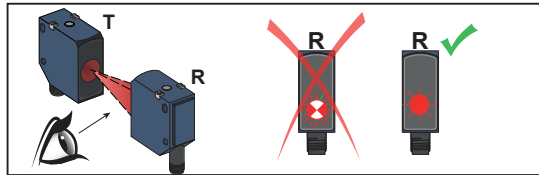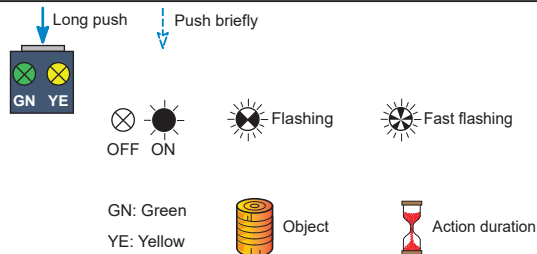

A Initial setting with XUK2LAKSMM12T


- 1 Check operation conditions.

With free light path, align light spot XUK2LAKSMM12T to XUK2LAPSMM12R.
Pay attention to alignment indication (LED 3, red in front screen of XUK2LAPSMM12R).
If it is on, alignment is OK.

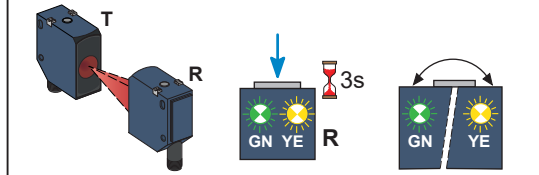


B Adaption to application XUK2LAPSMM12R

With free light path, push button on XUK2LAPSMM12R (approx. 3 s) until both LEDs flash synchronously.
Release button (LEDs flash asynchronously).

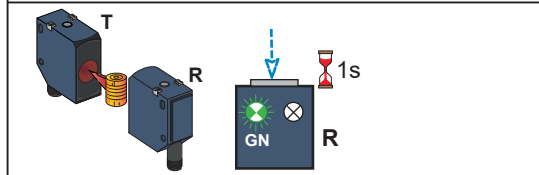


When object is not moving (static):

Place object in sensing range.
Push button briefly (1 s).
Release button.

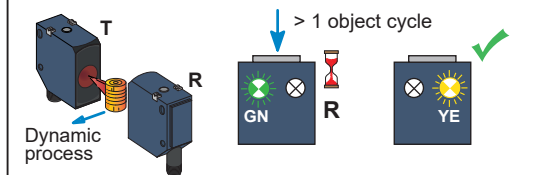

When object is moving (dynamic):


Press the pushbutton and keep it pressed until the object has passed at least once.
Release the button. The setting is saved.
The sensor is ready for use.
If the object is detected, the yellow status LED is on (N.O. setting) or is off (N.C. setting).

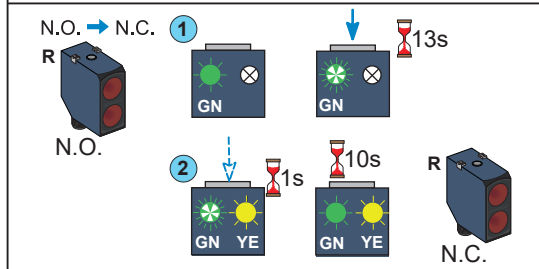

C Setting of N.O. / N.C

- 1 Without object, press the receiver learning button for (about) 13 s. The green LED flashes rapidly.
- 2 As long as the green LED is flashing, press the learning button for 1 s to invert the output.
Without object, yellow LED off = N.O., yellow LED on = N.C.

→ When OK, do not push the button for 10 s.
Setting is saved. Sensor is ready to operate.

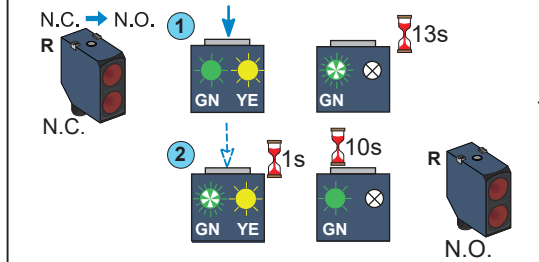

D Setting with input (ET - External Teach / Lock) on XUK2LAPSMM12R

+U_B = Teach-in (as button)
- U_B = Button locked
not connected = Normal operation (free run).

CE **Manufacturer :**
Schneider Electric Industries SAS
35 rue Joseph Monier
92500 Rueil Malmaison
France

UK CA **UK Representative :**
Schneider Electric Limited
Stafford Park 5
Telford, TF3 3BL
United Kingdom

EAC **Уполномоченный поставщик в РФ :**
АО «Шнейдер Электрик»
Адрес: 127018, Россия, г. Москва, ул. Двинцев, д.12, корп.1
Тел. +7 (495) 777 99 90
Факс +7 (495) 777 99 92
Қазақстан Республикасында ресми жеткізуші :
ЖШС «Шнейдер Электрик»
Мекен-жайы: Қазақстан Республикасы, Алматы қ., Достық даң.,
«Кен Дала» Бизнес Орталығы, 5-ші қабат.
Тел.: +7 (727) 357 23 57
Факс.: +7(727) 357 24 39