

Use

Connected switch without neutral with dimmer option, configured by default as ON/OFF.
 Can be combined with one or more wireless lighting controls (dimmer mode can be activated from the Home + Control app).
 For local or remote control of your lighting.
 Supplied with an active power compensator (Cat. No. 0 401 49), mandatory to ensure optimum operation with commercially-available lamps. One compensator per lighting circuit is sufficient.
 Easy to install in place of a standard switch in a box 40 mm deep (minimum).
 Claw and/or screw fixing.

Range

| Designation | Cat. Nos. |
|--|------------------------------------|
| For use in conjunction with the starter pack. | |
| Connected switch without neutral with dimmer option. | <input type="checkbox"/> N4411CM2 |
| With LED indicator (configuration) and RESET button | <input type="checkbox"/> NT4411CM2 |
| (hidden) used to return to factory settings. | <input type="checkbox"/> L4411CM2 |

Colours code:

- White
- Silver
- Anthracite

Connection

Terminal type: screw
 Terminal capacity: 2 x 1.5 mm² or 2 x 2.5 mm²
 Stripping length: 8 mm flat screwdriver: 3 mm

Technical characteristics

- Mechanical characteristics

Protection against impacts: IK 04
 Protection against solid bodies/liquids: IP 20 without plate and rockerplate

- Material characteristics

Mechanism casing: PC
 Halogen-free
 UV resistant

Self-extinguishing: + 850°C/30 s for insulating parts holding live parts in place.
 + 650°C/30 s for the other insulating components.

- Electrical characteristics

Voltage: 100/240 V~
 Power: 300 W
 Frequency: 50/60 Hz
 Standby consumption: < 0.2 mW

| | | R | L | | | |
|--------|------|-------|----------|------|--------|--------|
| | | | LED | | | |
| | | | | | | |
| 240 V~ | Max. | 300 W | (*) 50 W | 60 W | 300 VA | 300 VA |
| | Min. | 7 W | 5 W | 9 W | 10 VA | 35 VA |
| 100 V~ | Max. | 150 W | (*) 25 W | 30 W | 150 VA | 150 VA |
| | Min. | 7 W | 5 W | 9 W | 10 VA | 35 VA |

(*) Or 5 lamps max. For comfortable lighting, we recommend using bulbs of the same type and make.

(**) The ferromagnetic transformers must be charged to more than 60% of their power. When calculating the permissible power, the ferromagnetic transformer efficiency must be taken into account. A load must be connected before programming and using the product.

Zigbee technology 2.4 GHz to 2.4835 GHz

Power level: < 100 mW
 Range: 200 m of unobstructed space
 10 m between products indoors

Standards and approvals


Compliant with installation and manufacturing standards.
See e-catalogue.

The undersigned, BTICINO, declares that the radio-electric equipment type (N-NT-L4411CM2) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website:

www.bticino.it/red

Dimensions (mm)

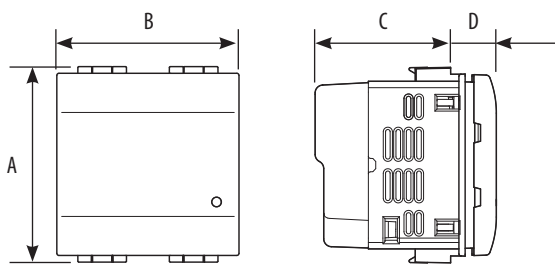

| A | B | C | D |
|----|----|----|----|
| 47 | 44 | 33 | 11 |

Care

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

The plates must not be painted.

Caution: Always test before using special cleaning products.




Take care to recycle the battery appropriately.


RAEE/WEEE: bticino.com/disposal

Operation

Front view

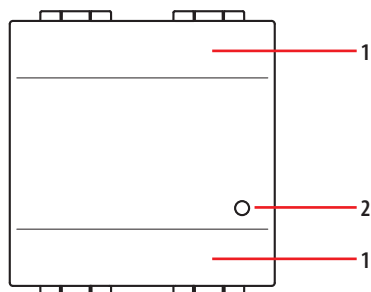

Front view without coverkey

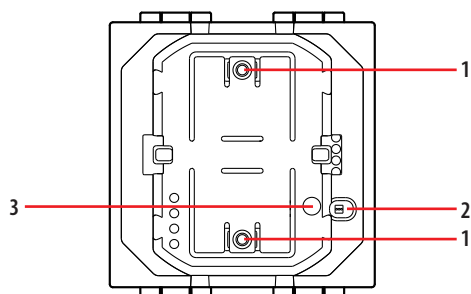

Legend

1. Control Pushbutton
2. LED indicator: useful during installation
3. RESET pushbutton: used to return to factory settings