
Product Environmental Profile

SEDNA TV-R-SAT intermediate 10DB Wh







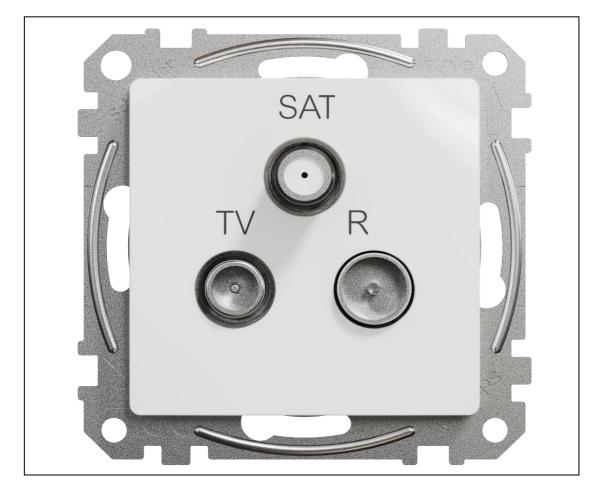

General information

Representative product

SEDNA TV-R-SAT intermediate 10DB Wh - SDD111488


Description of the product

The main function of the product is to transmit the television, radio and satellite frequencies coming from the cable to the connected plug.


Functional unit

To protect, link, splice or connect a connection point during 30 years (reference life time) with a 70% use rate for copper telecomunication application in residental/tertiary/industrial building.

Constituent materials



122.2 g including the product, its packaging and additional elements and accessories

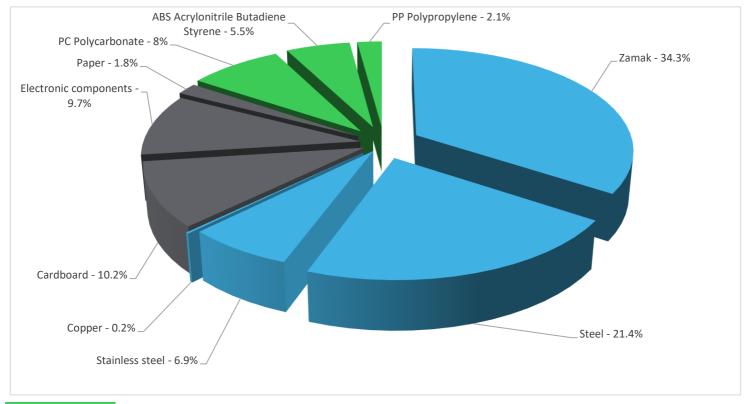

 Plastics
 15.6%

 Metals
 62.8%

 Others
 21.7%

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page


Additional environmental information

The SEDNA TV-R-SAT intermediate 10DB Wh presents the following relevent environmental aspects						
Manufacturing	Manufactured at a production site complying with the regulations					
	Weight and volume of the packaging optimized, based on the European Union's packaging directive					
Distribution	Packaging weight is 17.2 g, consisting of PP (14%), cardboard (13%), paper (73%)					
	Product distribution optimised by setting up local distribution centres					
Installation	Ref SDD111488 SEDNA TV-R-SAT intermediate 10DB does not require any installation operations.					
Use	The product does not require special maintenance operations.					
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials					
	This product contains electronic card (2.5 g) that should be separated from the stream of waste so as to optimize end-of-life treatment.					
End of life	The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website					
	http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page					
	Based on "ECO'DEEE recyclability and recoverability calculation method" Recyclability potential: 87% (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).					

Environmental impacts

Reference life time	30 years					
Product category	Copper telecom accessory					
Installation elements	Packaging is being disposed during installation process.					
Use scenario	Use rate:100% of the reference life time.					
Geographical representativeness	Europe, Russia					
Technological representativeness	The main function of the product is to transmit the television, radio and satellite frequencies coming from the cable to the connected plug.					
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: Poland	RER and RU	RER and RU	RER and RU		

Compulsory indicators SEDNA TV-R-SAT intermediate 10DB Wh - SDD111488							
	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
eral resources depletion	kg Sb eq	7.10E-05	7.10E-05	0*	0*	0*	0*
soil and water acidification	kg SO₂ eq	2.30E-03	2.19E-03	7.20E-05	4.28E-06	0*	3.56E-05
er eutrophication	kg PO ₄ ³⁻ eq	1.07E-03	1.04E-03	1.66E-05	1.77E-06	0*	1.17E-05
al warming	kg CO ₂ eq	1.23E+00	1.18E+00	1.58E-02	1.04E-03	0*	2.73E-02
ne layer depletion	kg CFC11 eq	7.94E-08	7.82E-08	3.19E-11	0*	0*	1.16E-09
tochemical oxidation	kg C ₂ H ₄ eq	2.75E-04	2.66E-04	5.14E-06	3.22E-07	0*	3.53E-06
	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
er	m3	1.22E-02	1.22E-02	1.41E-06	0*	0*	1.91E-05
ду	MJ	2.02E+01	1.98E+01	2.23E-01	1.32E-02	0*	1.70E-01

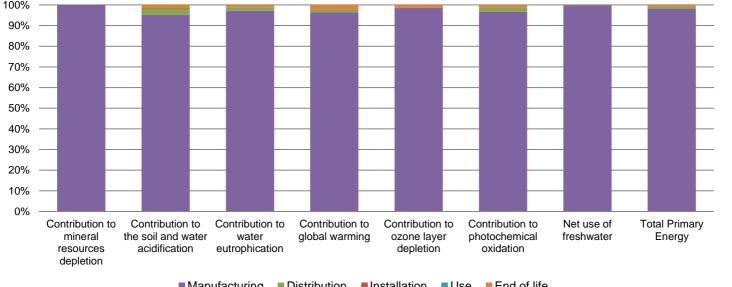

Optional indicators		SEDNA TV-F	R-SAT intermediat	te 10DB Wh - 9	SDD111488		
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1.26E+01	1.22E+01	2.22E-01	1.29E-02	0*	1.37E-01
Contribution to air pollution	m³	2.31E+02	2.29E+02	6.71E-01	5.85E-02	0*	1.21E+00
Contribution to water pollution	m³	1.05E+02	1.00E+02	2.59E+00	1.50E-01	0*	1.72E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1.39E-02	1.39E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	5.83E-01	5.83E-01	2.97E-04	7.55E-05	0*	1.80E-04
Total use of non-renewable primary energy resources	MJ	1.97E+01	1.93E+01	2.23E-01	1.31E-02	0*	1.70E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5.83E-01	5.83E-01	2.97E-04	7.55E-05	0*	1.80E-04
Use of renewable primary energy resources used as raw material	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.87E+01	1.83E+01	2.23E-01	1.31E-02	0*	1.70E-01
Use of non renewable primary energy resources used as raw material	MJ	9.26E-01	9.26E-01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	3.52E+00	3.39E+00	0*	0*	0*	1.31E-01
Non hazardous waste disposed	kg	3.75E-01	3.72E-01	5.60E-04	2.10E-03	0*	5.02E-04
Radioactive waste disposed	kg	2.24E-04	2.22E-04	3.99E-07	9.05E-08	0*	9.05E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1.18E-01	1.12E-02	0*	1.53E-02	0*	9.15E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	5.38E-03	0*	0*	0*	0*	5.38E-03
Exported Energy	MJ	4.63E-05	4.36E-06	0*	4.20E-05	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number: SCHN-00515-V01.01-EN

Verifier accreditation N° VH39

Supplemented by

Drafting rules

documents

PCR-ed3-EN-2015 04 02 PSR-0005-ed2-EN-2016 03 29

Date of issue 11/2020 Information and reference

www.pep-ecopassport.org

Validity period 5 years

Independent verification of the declaration and data, in compliance with ISO 14025: 2010

Internal External X

The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)

PEP are compliant with XP C08-100-1:2016

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14025: 2010 « Environmental labels and declarations. Type III environmental

declarations »



Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

SCHN-00515-V01.01-EN © 2019 - Schneider Electric - All rights reserved 11/2020