

# Product Environmental Profile

**LATCH BLK LC1 D09-D65A 42V**






## General information

<b>Representative product</b>	LATCH BLK LC1 D09-D65A 42V - LAD6K10E
<b>Description of the product</b>	The LAD6K10E is mounted on the front face of the contactor. When the contactor coil is switched on, the mobile holder drives the mechanical device of the LAD6K10E which locks the contactor in the closed position, after switching off the power of the contactor coil. The unlocking of the LAD6K10E is done manually or by remote control
<b>Functional unit</b>	To hold mechanically the contactor in closed position with contactor coil not powered during a running time between a few minutes and several hours over a period of at least 20 years, control circuit voltage to 42/48 V AC or 42/48 V DC



## Constituent materials

<b>Reference product mass</b>	99 g including the product, its packaging and additional elements and accessories
-------------------------------	---

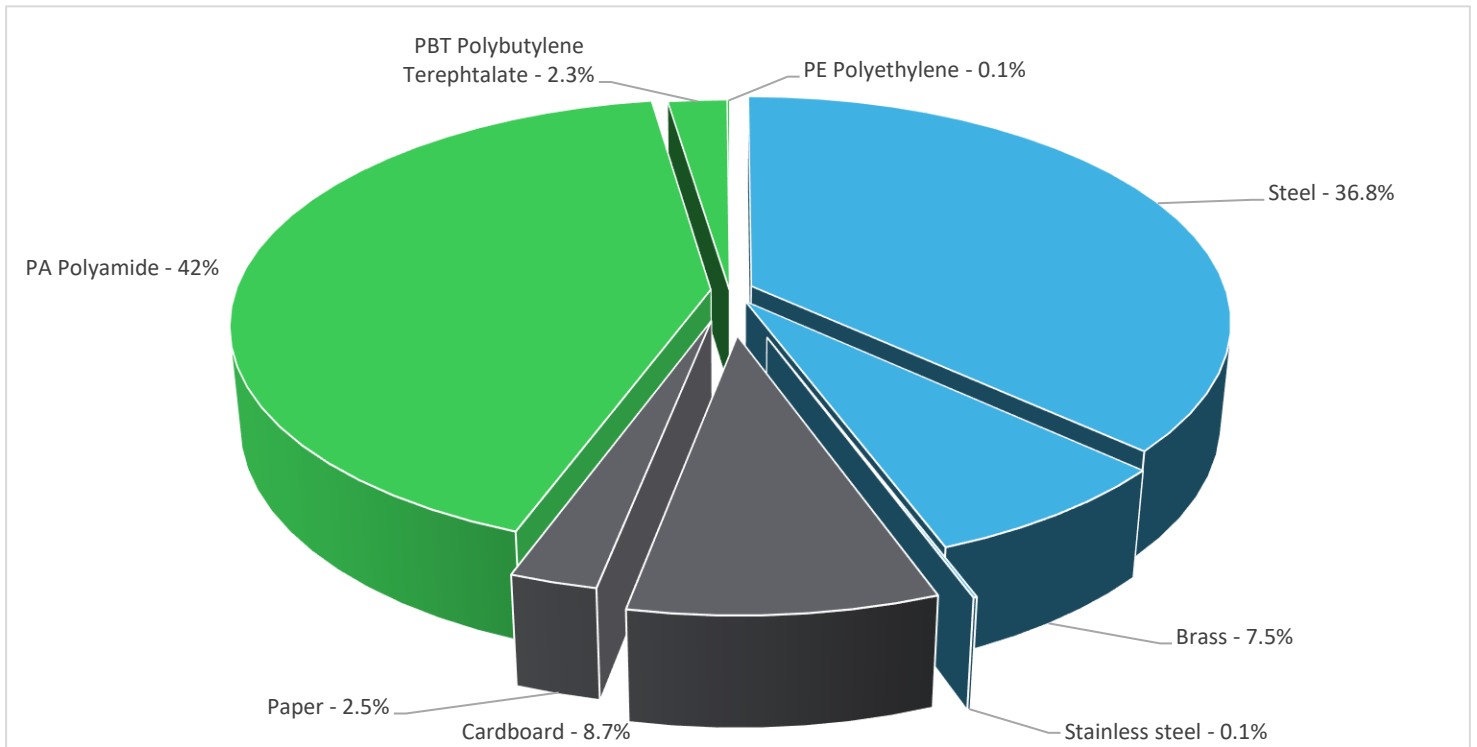

Plastics	44.4%
Metals	44.4%
Others	11.2%



## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate- BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The LATCH BLK LC1 D09-D65A 42V presents the following relevant environmental aspects

<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 11 g, consisting of Cardboard(78%),Paper(22%)  Product distribution optimised by setting up local distribution centres
<b>Installation</b>	LAD6K10E does not require any installation operations.
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials  This product contains PBT GF20 FR (17) (1.5g) that should be separated from the stream of waste so as to optimize end-of-life treatment.  The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website  <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>  Recyclability potential: <b>39%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).




## Environmental impacts

<b>Reference life time</b>	20 years			
<b>Product category</b>	Other equipments - Passive product - non-continuous operation			
<b>Installation elements</b>	No special components needed			
<b>Use scenario</b>	load rate / rated current (In): 30 % of In percentage of utilization time: 30%			
<b>Geographical representativeness</b>	Europe			
<b>Technological representativeness</b>	The LAD6K10E is mounted on the front face of the contactor. When the contactor coil is switched on, the mobile holder drives the mechanical device of the LAD6K10E which locks the contactor in the closed position, after switching off the power of the contactor coil. The unlocking of the LAD6K10E is done manually or by remote control			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: France	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27

### Compulsory indicators LATCH BLK LC1 D09-D65A 42V - LAD6K10E

Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.79E-04	1.79E-04	0*	0*	0*	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	1.77E-03	1.58E-03	5.83E-05	2.49E-06	1.06E-04	2.69E-05
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	4.14E-04	3.88E-04	1.34E-05	6.05E-07	3.96E-06	7.69E-06
Contribution to global warming	kg CO <sub>2</sub> eq	1.07E+00	1.03E+00	1.28E-02	5.97E-04	1.40E-02	1.50E-02
Contribution to ozone layer depletion	kg CFC11 eq	4.45E-06	4.45E-06	0*	0*	3.39E-09	6.24E-10
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	2.42E-04	2.30E-04	4.16E-06	1.86E-07	4.99E-06	2.79E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m <sup>3</sup>	7.49E-03	7.44E-03	1.14E-06	0*	3.64E-05	1.25E-05
Total Primary Energy	MJ	1.27E+01	1.21E+01	1.81E-01	7.80E-03	2.83E-01	1.30E-01

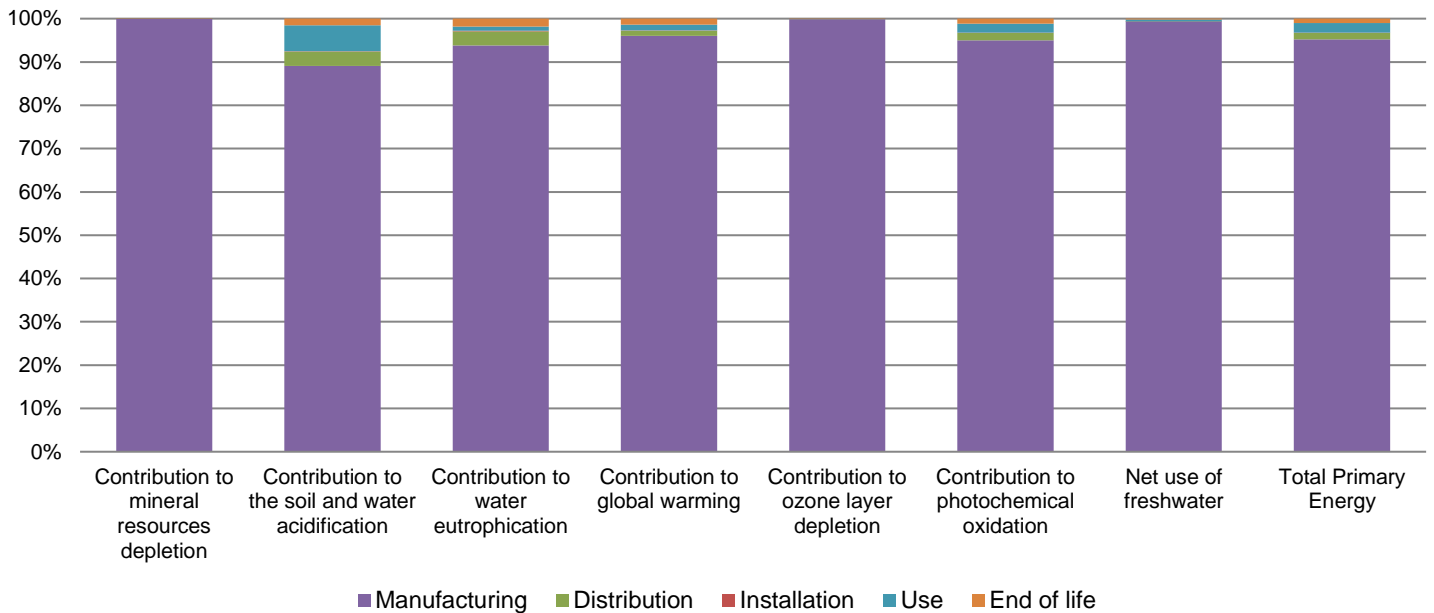

Optional indicators		LATCH BLK LC1 D09-D65A 42V - LAD6K10E					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	7.26E+00	6.83E+00	1.79E-01	7.74E-03	1.44E-01	1.05E-01
Contribution to air pollution	m³	2.20E+02	2.18E+02	5.43E-01	2.38E-02	5.99E-01	9.45E-01
Contribution to water pollution	m³	2.66E+02	2.62E+02	2.10E+00	9.05E-02	5.86E-01	1.16E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	9.55E-04	9.55E-04	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2.51E-01	2.30E-01	2.41E-04	0*	2.02E-02	1.44E-04
Total use of non-renewable primary energy resources	MJ	1.24E+01	1.18E+01	1.80E-01	7.78E-03	2.63E-01	1.30E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	4.24E-02	2.18E-02	2.41E-04	1.21E-05	2.02E-02	1.44E-04
Use of renewable primary energy resources used as raw material	MJ	2.08E-01	2.08E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.10E+01	1.04E+01	1.80E-01	7.78E-03	2.63E-01	1.30E-01
Use of non renewable primary energy resources used as raw material	MJ	1.43E+00	1.43E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	4.69E+00	4.55E+00	0*	0*	0*	1.42E-01
Non hazardous waste disposed	kg	6.31E-01	5.78E-01	4.54E-04	8.10E-05	5.22E-02	3.98E-04
Radioactive waste disposed	kg	2.90E-04	2.46E-04	3.23E-07	0*	4.26E-05	6.33E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	5.52E-02	9.60E-03	0*	1.10E-02	0*	3.46E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2.21E-03	0*	0*	0*	0*	2.21E-03
Exported Energy	MJ	3.48E-05	3.21E-06	0*	3.16E-05	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP2011001_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	11/2020	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS

Country Customer Care Center  
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier  
 CS 30323  
 F- 92506 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

ENVPEP2011001\_V1

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

11/2020