



Canalis[®] 20 to 1000 A

Catalogue 2016
Prefabricated busbar trunking



schneider-electric.com

Life Is On





Green Premium™

Endorsing eco-friendly products in the industry



Green Premium™ Product

Green Premium is the only label that allows you to effectively develop and promote an environmental policy whilst preserving your business efficiency. This ecolabel guarantees compliance with up-to-date environmental regulations, but it does more than this.

Over 75% of Schneider Electric manufactured products have been awarded the Green Premium ecolabel



Discover what we mean by green

Check your products!

Schneider Electric's Green Premium ecolabel is committed to offering transparency, by disclosing extensive and reliable information related to the environmental impact of its products:

RoHS

Schneider Electric products are subject to RoHS requirements at a worldwide level, even for the many products that are not required to comply with the terms of the regulation. Compliance certificates are available for products that fulfil the criteria of this European initiative, which aims to eliminate hazardous substances.

REACH

Schneider Electric applies the strict REACH regulation on its products at a worldwide level, and discloses extensive information concerning the presence of SVHC (Substances of Very High Concern) in all of these products.

PEP: Product Environmental Profile

Schneider Electric publishes complete set of environmental data, including carbon footprint and energy consumption data for each of the lifecycle phases on all of its products, in compliance with the ISO 14025 PEP ecopassport program. PEP is especially useful for monitoring, controlling, saving energy, and/or reducing carbon emissions.

EoLI: End of Life Instructions

Available at the click of a button, these instructions provide:

- Recyclability rates for Schneider Electric products.
- Guidance to mitigate personnel hazards during the dismantling of products and before recycling operations.
- Parts identification for recycling or for selective treatment, to mitigate environmental hazards/ incompatibility with standard recycling processes.

Range contents

Index	3
Index of catalogue numbers	
Introduction	9
<hr/>	
Design guides and characteristics	29
Design guide	30
Characteristics	46
Design and quotation tools	54
<hr/>	
Canalis KDP	57
Presentation	58
Description	62
Catalogue numbers - Dimensions	69
Installation	75
<hr/>	
Canalis KBA	79
Presentation	80
Description	84
Catalogue numbers - Dimensions	89
Installation	97
<hr/>	
Canalis KBB	99
Presentation	100
Description	104
Catalogue numbers - Dimensions	110
Installation	118
<hr/>	
Canalis KN	121
Presentation	122
Description	126
Catalogue numbers - Dimensions	132
Installation	150
<hr/>	
Canalis KS	153
Presentation	154
Description	158
Catalogue numbers - Dimensions	167
Installation	200
<hr/>	
Canalis KS riser	205
Presentation	206
Description	210
Catalogue numbers - Dimensions	212
Installation	222
<hr/>	
Canalis KT	225
Presentation	226
<hr/>	
Technical specifications	231
Technical specifications	232
<hr/>	
Maintenance	239
Maintenance	240
<hr/>	
Recommendations for special applications	243
Recommendations for special applications	244
Coordination	256
<hr/>	
Catalogue numbers	273
Catalogue numbers	274
<hr/>	
Canalis worldwide	279
Canalis worldwide	280

Cat.no.	Designation	Pages	Cat.no.	Designation	Pages
08000			KBB25ED42300W	Transport length 25 A, 3 m	111
08903	Set of 12 labels (height 24 mm)	149, 199	KBB25ED42305W	Straight distribution lengths 25 A, 3 m	111
08905	Set of 12 label-holders (height 24 mm)	149, 199	KBB25ED44300W	Transport length 25 A, 3 m	111
08907	Set of 12 divisible labels (height 24 mm)	149, 199	KBB25ED44305W	Straight distribution lengths 25 A, 3 m	111
13000			KBB40ABD4W	Feed unit 40 A right mounting	110
13136	Screw-on plate for adapting 65 x 85 mm power-socket bases	141, 149, 187	KBB40ABD44EW	Feed unit 40 A right mounting	111
13137	Screw-on plate for blanking of unused openings	141, 149, 187	KBB40ABD44TW	Feed unit 40 A right mounting	111
13940	Modular blanking plate divisible set of 10 x 5	149, 199	KBB40ABG4W	Feed unit 40 A left mounting	110
81000			KBB40ABG44T2W	Feed unit 40 A left mounting	111
81140	Household NF sockets	141, 187	KBB40ABG44W	Feed unit 40 A left mounting	111
81141	Household Schuko sockets	141, 187	KBB40ABT4W	Feed unit 40 A central mounting	110
KBA			KBB40ABT44W	Feed unit 40 A central mounting	111
KBA25ABG4W	Feed unit 25 A left mounting	90	KBB40DF405W	Flexible length 40 A, 0.5 m	112
KBA25ED2300W	Transport length 25 A, 3 m	89	KBB40DF420W	Flexible length 40 A, 2 m	112
KBA25ED2302W	Straight distribution length 25 A, 3 m	89	KBB40DF4405W	Flexible length 40 A, 0.5 m	112
KBA25ED2303W	Straight distribution length 25 A, 3 m	89	KBB40DF4420W	Flexible length 40 A, 2 m	112
KBA25ED2305W	Straight distribution length 25 A, 3 m	89	KBB40ED2202W	Straight distribution lengths 40 A, 2 m	110
KBA25ED4202W	Straight distribution length 25 A, 2 m	89	KBB40ED2300W	Transport length 40 A, 3 m	110
KBA25ED4300W	Transport length 25 A, 3 m	89	KBB40ED2303W	Straight distribution lengths 40 A, 3 m	110
KBA25ED4302W	Straight distribution length 25 A, 3 m	89	KBB40ED4202W	Straight distribution lengths 40 A, 2 m	110
KBA25ED4303W	Straight distribution length 25 A, 3 m	89	KBB40ED4300W	Transport length 40 A, 3 m	110
KBA25ED4305W	Straight distribution length 25 A, 3 m	89	KBB40ED4303W	Straight distribution lengths 40 A, 3 m	110
KBA40ABD4W	Feed unit 40 A right mounting	90	KBB40ED22203W	Straight distribution lengths 40 A, 2 m	111
KBA40ABG4W	Feed unit 40 A left mounting	90	KBB40ED22300W	Straight distribution lengths 40 A, 3 m	111
KBA40ABT4W	Center feed unit 40 A	90	KBB40ED22305W	Straight distribution lengths 40 A, 3 m	111
KBA40DF405W	Flexible length 40 A, 0.5 m	90	KBB40ED42203W	Straight distribution lengths 40 A, 2 m	111
KBA40DF420W	Flexible length 40 A, 2 m	90	KBB40ED42300W	Transport length 40 A, 3 m	111
KBA40ED2203W	Straight distribution lengths 40 A, 2 m	89	KBB40ED42305W	Straight distribution lengths 40 A, 3 m	111
KBA40ED2300W	Transport length 40 A, 3 m	89	KBB40ED44203W	Straight distribution lengths 40 A, 2 m	111
KBA40ED2303W	Straight distribution lengths 40 A, 3 m	89	KBB40ED44300W	Transport length 40 A, 3 m	111
KBA40ED2305W	Straight distribution lengths 40 A, 3 m	89	KBB40ED44305W	Straight distribution lengths 40 A, 3 m	111
KBA40ED4203W	Straight distribution length 40 A, 2 m	89	KBB40EDA20W	Empty length 2 m	110, 111
KBA40ED4300W	Transport length 40 A, 3 m	89	KBB40ZFC	Pigtail hook	91, 112
KBA40ED4303W	Straight distribution lengths 40 A, 3 m	89	KBB40ZFC5	Open hook	91, 113
KBA40ED4305W	Straight distribution lengths 40 A, 3 m	89	KBB40ZFC6	Closed ring	91, 113
KBA40EDA20W	Empty length 2 m	89	KBB40ZFG1	Cable duct 25 mm fixing bracket	91, 113
KBA40ZFG2	Cable duct support and intermediate support	98, 123	KBB40ZFGU	Cable support	91, 113
KBA40ZFPU	Spring fixing bracket KBA	91, 112	KBB40ZFL	Fixing bracket	113
KBA40ZFSLW	Universal fixing bracket	91	KBB40ZFMP	Raiser for fixing	91, 112
KBA40ZFSUW	Spring fixing bracket	91, 112	KBB40ZFS	Cutting pliers	91, 113
KBA40ZFUW	Universal fixing bracket	91, 112	KBB40ZFS23	Steel cable suspension system	91, 112
KBB			KBB40ZFSLW	Cable suspension system	112
KBB25ED2300W	Transport length 25 A, 3 m	110	KBB40ZFPU	Spring fixing bracket	112
KBB25ED2303W	Straight distribution lengths 25 A, 3 m	110	KBB40ZFSUW	Cable suspension system	112
KBB25ED4300W	Transport length 25 A, 3 m	110	KBB40ZFUW	Universal fixing bracket	112
KBB25ED4303W	Straight distribution lengths 25 A, 3 m	110	KBB40ZJ4W	Additional jointing unit 1 ribbon	110
KBB25ED22300W	Transport length 25 A, 3 m	111	KBB40ZJ44W	Additional jointing unit 2 ribbon	111
KBB25ED22305W	Straight distribution lengths 25 A, 3 m	111	KBC		
			KBC06DCERF1	RF control tap-off unit	74
			KBC06DCERFZ	RF control tap-off unit with GST18i3	74

Cat.no.	Designation	Pages	Cat.no.	Designation	Pages
KBC10DCB20	10 A tap-off units	70, 93, 114	KNA40ED4303	Straight length 40 A	132
KBC10DCB40	10 A tap-off units	70, 93, 114	KNA40ED4306	Straight length 40 A	132
KBC10DCC21Z	10 A tap-off units	70, 93, 114	KNA63AB4	End feed unit 63 A	133
KBC10DCC211	10 A tap-off units	70, 93, 114	KNA63ABT4	Center feed unit 63 A	133
KBC10DCS101	10 A tap-off units	70, 93, 114	KNA63DF410	Flexible length 63 A	135
KBC10DCS201	10 A tap-off units	70, 93, 114	KNA63DL4	Flexible edgewise elbows 63 A	135
KBC10DCS301	10 A tap-off units	70, 93, 114	KNA63ED4204	Straight length 63 A	132
KBC10DDA20	10 A tap-off units	73	KNA63ED4301	Straight length 63 A	132
KBC10DDA21Z	10 A tap-off units	73	KNA63ED4303	Straight length 63 A	132
KBC10DMT20	10 A tap-off units	73	KNA63ED4306	Straight length 63 A	132
KBC10DMT21Z	10 A tap-off units	73	KNA63ZJ4	Jointing device 40 to 63 A	137
KBC10DSA20	10 A tap-off units	73	KNA100AB4	End feed unit 100 A	133
KBC10DSA21Z	10 A tap-off units	73	KNA100ABT4	Center feed unit 100 A	133
KBC10DVV20	10 A tap-off units	73	KNA100DF410	Flexible edgewise length 100 A	135
KBC10DVV21Z	10 A tap-off units	73	KNA100DL4	Flexible edgewise elbows 100 A	135
KBC16DCB21	16 A tap-off units	71, 94, 115	KNA100ED4204	Straight length 100 A	132
KBC16DCB22	16 A tap-off units	71, 94, 116	KNA100ED4301	Straight length 100 A	132
KBC16DCB40	16 A tap-off units	72, 95, 116	KNA100ED4303	Straight length 100 A	132
KBC16DCB216	16 A tap-off units	72, 95, 116	KNA100ED4306	Straight length 100 A	132
KBC16DCB226	16 A tap-off units	72, 95, 116	KNA100EDF430	Flexible length 160 A	136
KBC16DCF21	16 A tap-off units	71, 94, 115	KNA160AB4	End feed unit 160 A	133
KBC16DCF22	16 A tap-off units	71, 94, 116	KNA160ABT4	Center feed unit 160 A	133
KBC16DCF40	16 A tap-off units	72, 95, 116	KNA160DF410	Flexible length 160A	135
KBC16DCF216	16 A tap-off units	72, 95, 116	KNA160DL4	Flexible elbow 160 A	135
KBC16DCF226	16 A tap-off units	72, 95, 116	KNA160ED4204	Straight length 160 A	132
KBC16DCP1	16 A tap-off units	73, 96, 117	KNA160ED4303	Straight length 160 A	132
KBC16DCP2	16 A tap-off units	73, 96, 117	KNA160ED4306	Straight length 160 A	132
KBC16DCS101T	16 A tap-off units	71, 94, 115	KNA160ZJ4	Spare part	137
KBC16DCS102T	16 A tap-off units	71, 94, 115	KNB		
KBC16DCS201T	16 A tap-off units	71, 94, 115	KNB16CF2	Tap-off unit 16 A, L + N + PE for NF fuses	142
KBC16DCS202T	16 A tap-off units	71, 94, 115	KNB16CG2	Tap-off unit 16 A L + N + PE for BS fuses	144
KBC16DCS301T	16 A tap-off units	71, 94, 115	KNB16CM2	Tap-off unit 16 A, L + N + PE	138
KBC16DCS302T	16 A tap-off units	71, 94, 115	KNB16CM2H	Tap-off unit 16 A, L + N + PE	138
KBC16ZB1	Blanking plate	91, 113	KNB16CN5	Tap-off unit 16 A for DIN fuses	146
KBC16ZC1	Rear support bracket	73, 96, 117	KNB20CG5	Tap-off unit 20 A for BS fuses	144
KBC16ZL10	Interlocking device	91, 113	KNB25CF5	Tap-off unit 25 A for NF fuses	142
KBC16ZL20	Interlocking device	91, 113	KNB25SD4	Tap-off unit 25 A with isolator for DIN fuses	146
KBC16ZL30	Interlocking device	91, 113	KNB32CM55	Tap-off unit 32 A for modular equipment	138
KBC16ZT1	Bus connection device	73, 96, 117	KNB32CP	Tap-off unit 32 A empty for 2 sockets	141
KDP			KNB32CP11D	Tap-off unit 32 A with 2 DIN sockets	140
KDP20ABG4	Feed unit 20 A left mounting	69	KNB32CP11F	Tap-off unit 32 A with 2 NF sockets	140
KDP20ED424120	Distribution length 20 A, 24 m	69	KNB32CP15D	Tap-off unit 32 A with 1 DIN and 1 IEC socket	140
KDP20ED4192120	Distribution length 20 A, 192 m	69	KNB32CP15F	Tap-off unit 32 A with 1 NF and 1 IEC socket	140
KFB			KNB32CP35	Tap-off unit 32 A with 2 IEC sockets	140
KFB25CD253	Cable duct 25 m	91, 113	KNB32SG4	Tap-off unit 32 A with isolator for BS fuses	145
KFBCA81100	Cantilever arm 100 mm	136	KNB50SD4	Tap-off unit 50 A with isolator for DIN fuses	146
KFBCA81200	Cantilever arm 200 mm	172, 215, 220	KNB50SF4	Tap-off unit 50 A with isolator for NF fuses	143
KFBCA81300	Cantilever arm 300 mm	178, 184	KNB50SN4	Tap-off unit 50 A with isolator for DIN fuses	146
KNA			KNB63SM48	Tap-off unit 63 A for modular equipment	139
KNA40ED4301	Straight length 40 A	132			

Cat.no.	Designation	Pages	Cat.no.	Designation	Pages
KNB63SM412	Tap-off unit 63 A for modular equipment	139	KSA250DLF40	Elbow 250 A	171, 213
KNB160ZB1	Spare part	137	KSA250DTC40	Tee 250 A	171
KNB160ZF1	KN fixing brackets 40 A to 160 A	133	KSA250ED4081	Riser distribution length 0.8 m 1 tap-off outlet 250 A	212
KNB160ZF2	KN fixing brackets 40 A to 160 A	133	KSA250ED4156	Straight distribution length 1.5 m 250 A	168
KNB160ZFG100	Fixing bracket for tracking, 100 mm	133	KSA250ED4208	Straight distribution length 2 m 250 A	168
KNB160ZFKP1	Vertical pendant kit 160 A	136	KSA250ED4306	Straight distribution length 3 m 250 A	168
KNB160ZFPU	KN spring fixing bracket	133	KSA250ED45010	Straight distribution length 5 m 250 A	168
KNB160ZL10	Tap-off locating device	149	KSA250ET4A	Made to measure length 250 A	170
KNB160ZL20	Tap-off locating device	149	KSA250ET4AF	Fire barrier length 250 A	170, 212
KNB160ZL30	Tap-off locating device	149	KSA250EV4203	Riser distribution length 2 m 3 tap-off outlets 250 A	212
KNB160ZL40	Tap-off locating device	149	KSA250EV4254	Riser distribution length 2.5 m 4 tap-off outlets 250 A	212
KNBQPF	Connector with surge arrester quick-PF	147	KSA250FA4	Old KS 250 A adapter	173
KNBQPRD	Tap-off unit with surge arrester quick-PRD	148	KSA250ZJ4	Jointing device 250 A	173, 216
KNT			KSA400AB4	End feed unit 400 A	169, 214
KNT40ED4303	Straight length 40 A	134	KSA400ABT4	Centre feed box 400 A	170
KNT40ED4306	Straight length 40 A	134	KSA400AE4	Flange feed unit 400 A	170, 214
KNT63AB4	End feed unit 63 A	134	KSA400DLC40	Elbow 400 A	171, 213
KNT63ABT4	Center feed units 63 A	134	KSA400DLE40	Elbow 400 A	171, 213
KNT63DF410	Flexible length 63 A	135	KSA400DLF40	Elbow 400 A	171, 213
KNT63DL4	Flexible elbow 63 A	135	KSA400DTC40	Tee 400 A	171
KNT63ED4204	Straight length 63 A	134	KSA400ED4081	Riser distribution length 0.8 m 1 tap-off outlet 400 A	212
KNT63ED4303	Straight length 63 A	134	KSA400ED4156	Straight distribution length 1.5 m 400 A	168
KNT63ED4306	Straight length 63 A	134	KSA400ED4208	Straight distribution length 2 m 400 A	168
KNT63ZJ4	Jointing device 40 to 63 A	137	KSA400ED4306	Straight distribution length 3 m 400 A	168
KNT63ZT1	Remote control power socket block	149	KSA400ED45010	Straight distribution length 5 m 400 A	168
KNT100AB4	End feed unit 100 A	134	KSA400ET4A	Made to measure length 400 A	167, 170
KNT100ABT4	End feed unit 100 A	134	KSA400ET4AF	Fire barrier length 400 A	170, 212
KNT100DF410	Flexible length 100 A	135	KSA400ET430	Transport length 3 m 500 A	167
KNT100DL4	Flexible edgewise elbows 100 A	135	KSA400ET450	Transport length 5 m 500 A	167
KNT100ED4204	Straight length 100 A	134	KSA400EV4203	Riser distribution length 2 m 3 tap-off outlets 500 A	212
KNT100ED4303	Straight length 100 A	134	KSA400EV4254	Riser distribution length 2.5 m 4 tap-off outlets 500 A	212
KNT100ED4306	Straight length 100 A	134	KSA400FA4	Old KS 400 A adapter	173
KNT100ZJ4	Spare part	137	KSA400ZJ4	Jointing device 400 A	173, 216
KSA			KSA500ED4306	Straight distribution length 3 m 500 A	174
KSA80EZ5	Fixing bracket	169	KSA500ED45010	Straight distribution length 5 m 500 A	174
KSA100AB4	End feed unit 100 A	169, 214	KSA500ET4AF	Fire barrier length 500 A	217
KSA100ED4081	Riser distribution length 0.8 m 1 tap-off outlet 100 A	212	KSA500ET430	Transport length 3 m 500 A	167
KSA100ED4306	Straight distribution length 3 m 100 A	168	KSA500ET450	Transport length 5 m 500 A	167
KSA100ED45010	Straight distribution length 5 m 100 A	168	KSA500EV4203	Riser distribution length 2 m 3 tap-off outlets 500 A	217
KSA100EV4203	Riser distribution length 2 m 3 tap-off outlets 100 A	212	KSA500EV4254	Riser distribution length 2.5 m 4 tap-off outlets 500 A	217
KSA100EV4254	Riser distribution length 2.5 m 4 tap-off outlets 100 A	212	KSA500FA4	Old KS 500 A adapter	179
KSA160ED4306	Straight distribution length 3 m 160 A	168	KSA630ABD4	End feed unit 630 A	175, 219
KSA160ED45010	Straight distribution length 5 m 160 A	168	KSA630ABG4	End feed unit 630 A	175, 219
KSA250AB4	End feed unit 250 A	169, 214	KSA630ABT4	Centre feed box 630 A	176
KSA250ABT4	Centre feed box 250 A	170	KSA630AE4	Flange feed unit 630 A	176, 219
KSA250AE4	Flange feed unit 250 A	170, 214	KSA630DLC40	Elbow 630 A	177, 218
KSA250DLC40	Elbow 250 A	171, 214	KSA630DLE40	Elbow 630 A	177, 218
KSA250DLE40	Elbow 250 A	171, 214	KSA630DLF40	Elbow 630 A	177, 218


Cat.no.	Designation	Pages	Cat.no.	Designation	Pages
KSA630DTC40	Tee 630 A	177	KSB32CM55	Connector 32 A 5 modules	186
KSA630ED4081	Riser distribution length 0.8 m 1 tap-off outlet 630 A	217	KSB32CP	Empty tap-off unit 32 A	187
KSA630ED4154	Straight distribution length 1.5 m 630 A	174	KSB32CP11D	Tap-off unit 32 A with 2 power sockets	187
KSA630ED4206	Straight distribution length 2 m 630 A	174	KSB32CP11F	Tap-off unit 32 A with 2 power sockets	187
KSA630ED4306	Straight distribution length 3 m 630 A	174	KSB32CP15D	Tap-off unit 32 A with 2 power sockets	187
KSA630ED45010	Straight distribution length 5 m 630 A	174	KSB32CP15F	Tap-off unit 32 A with 2 power sockets	187
KSA630ET4A	Made to measure length 630 A	167, 176	KSB32CP35	Tap-off unit 32 A with 2 power sockets	187
KSA630ET4AF	Fire barrier length 630 A	176, 217	KSB32SG4	Connector 32 A fuse BS88A1	197
KSA630ET430	Transport length 3 m 630 A	167	KSB50SF4	Tap-off unit 50 A fuse 14x51	193
KSA630ET450	Transport length 5 m 630 A	167	KSB50SF5	Tap-off unit 50 A fuse 14x51	193
KSA630EV4203	Riser distribution length 2 m 3 tap-off outlets 630 A	217	KSB50SN4	Tap-off unit 50 A fuse E18	195
KSA630EV4254	Riser distribution length 2.5 m 4 tap-off outlets 630 A	217	KSB50SN5	Tap-off unit 50 A fuse E18	195
KSA630ZJ4	Jointing device 630 A	179, 221	KSB63SD4	Tap-off unit 63 A fuse E33	195
KSA800ED4306	Straight distribution length 3 m 800 A	180	KSB63SD5	Tap-off unit 63 A fuse E33	195
KSA800ED45010	Straight distribution length 5 m 800 A	180	KSB63SM48	Tap-off unit 63 A 8 modules	186
KSA800ET4AF	Fire barrier length 800 A	217	KSB63SM58	Tap-off unit 63 A 8 modules	186
KSA800ET430	Transport length 3 m 800 A	167	KSB80SG4	Tap-off unit 80 A fuse BS88A1	197
KSA800ET450	Transport length 5 m 800 A	167	KSB100SE4	Tap-off unit 100 A fuse T2	194, 196
KSA800EV4203	Riser distribution length 2 m 3 tap-off outlets 800 A	217	KSB100SE5	Tap-off unit 100 A fuse T2	194, 196
KSA800EV4254	Riser distribution length 2.5 m 4 tap-off outlets 800 A	217	KSB100SF4	Tap-off unit 100 A fuse 22x58	193
KSA800FA4	Old KS 800A adaptator	179, 185	KSB100SF5	Tap-off unit 100 A fuse 22x58	193
KSA1000ABD4	End feed unit 1000 A	181, 219	KSB100SM412	Tap-off unit 100 A 12 modules	186
KSA1000ABG4	End feed unit 1000 A	181, 219	KSB100SM512	Tap-off unit 100 A 12 modules	186
KSA1000ABT4	Centre feed box 1000 A	182	KSB160DC4	Tap-off unit 160 A Compact NSX	188
KSA1000AE4	Flange feed unit 1000 A	182, 219	KSB160DC5	Tap-off unit 160 A Compact NSX	188
KSA1000DLC40	Elbow 1000 A	183, 218	KSB160SE4	Tap-off unit 160 A fuse T00	194, 196
KSA1000DLE40	Elbow 1000 A	183, 218	KSB160SE5	Tap-off unit 160 A fuse T00	194, 196
KSA1000DLF40	Elbow 1000 A	183, 218	KSB160SF4	Tap-off unit 160 A fuse T0	194
KSA1000DTC40	Tee 1000 A	183	KSB160SF5	Tap-off unit 160 A fuse T0	194
KSA1000ED4081	Riser distribution length 0.8 m 1 tap-off outlet 1000 A	217	KSB160SG4	Tap-off unit 160 A fuse BS88	197
KSA1000ED4154	Straight distribution length 1.5 m 1000 A	180	KSB160SM413	Tap-off unit NG 160 A	190
KSA1000ED4206	Straight distribution length 2 m 1000 A	180	KSB160SM424	Tap-off unit 160 A 24 modules	191
KSA1000ED4306	Straight distribution length 3 m 1000 A	180	KSB160SM513	Tap-off unit NG 160 A	190
KSA1000ED45010	Straight distribution length 5 m 1000 A	180	KSB160SM524	Tap-off unit 160 A 24 modules	191
KSA1000ET4A	Made to measure length 1000 A	167, 182	KSB250DC4	Tap-off unit 250 A Compact NSX	188
KSA1000ET4AF	Fire barrier length 1000 A	182, 217	KSB250DC4TRE	Tap-off unit 250 A Compact NSX TRE	189
KSA1000ET430	Transport length 3 m 1000 A	167	KSB250DC5	Tap-off unit 250 A Compact NSX	188
KSA1000ET450	Transport length 5 m 1000 A	167	KSB250DC5TRE	Tap-off unit 250 A Compact NSX TRE	189
KSA1000EV4203	Riser distribution length 2 m 3 tap-off outlets 1000 A	217	KSB250SDF4	Tap-off unit 250 A Fupact INF	192
KSA1000EV4254	Riser distribution length 2.5 m 4 tap-off outlets 1000 A	217	KSB250SDF5	Tap-off unit 250 A Fupact INF	192
KSA1000ZJ4	Jointing device 1000 A	185, 221	KSB250SE4	Tap-off unit 250 A fuse T1	194, 196
KSB			KSB250SE5	Tap-off unit 250 A fuse T1	194, 196
KSB16CN5	Connector 16 A for E14 fuses	195	KSB250ZV1	Bottom support for riser 250 A	215
KSB20CG5	Connector 20 A for BS fuses	197	KSB400DC4	Tap-off unit 400 A Compact NSX	188
KSB25SD4	Tap-off unit 25 A fuse E27	195	KSB400DC4TRE	Tap-off unit 400 A Compact NSX TRE	189
KSB25SD5	Tap-off unit 25 A fuse E27	195	KSB400DC5	Tap-off unit 400 A Compact NSX	187
KSB32CF5	Connector 32 A fuse 10x38	193	KSB400DC5TRE	Tap-off unit 400 A Compact NSX TRE	189
			KSB400SDF4	Tap-off unit 400 A Fupact INF	192
			KSB400SDF5	Tap-off unit 400 A Fupact INF	192
			KSB400SE4	Tap-off unit 400 A fuse T2	194, 196
			KSB400SE5	Tap-off unit 400 A fuse T2	194, 196

Cat.no.	Designation	Pages
KSB400ZB1	Tap-off blanking plate 400 A IP55	173, 216
KSB400ZB2	Sprinkler proofing accessory 400 A	173, 216
KSB400ZC1	Door microswitch	199
KSB400ZF1	Fixing bracket 400 A	169
KSB400ZFKP1	Vertical pendant kit 400 A	215
KSB400ZV1	Bottom support for riser 400 A	220
KSB630ZV1	Bottom support for riser 630 A	242
KSB1000ZB1	Tap-off blanking plate 1000 A IP55	179, 185, 221
KSB1000ZB2	Sprinkler proofing accessory	179, 185, 221
KSB1000ZF1	Fixing bracket 1000 A	175, 181
KSB1000ZFKP1	Vertical pendant kit 1000 A	178, 184
KSB1000ZP1	Feed unit and jointing screws sealing kit	176, 179, 185, 216, 221
KSB1000ZP2	Tap-off outlet sealing kit	176, 179, 185, 216, 221
KSB1000ZV1	Bottom support for riser 1000 A	220
KSB1000ZV2	Floor support	215, 220
KSB1000ZV3	Floor support	215, 220
KSBQPF	Connector with surge arrester quick-PF	198
KSBQPRD	Tap-off unit with surge arrester quick-PRD	198

PKY

PKY16F723	Industrial sockets 16 A, 200-250 V AC, 2P + T, 65 x 85	141, 187
PKY16F725	Industrial sockets 16 A, 200-250 V AC, 3P + N + T, 90 x 100	141, 187
PKY16F733	Industrial sockets 16 A, 380-415 V AC, 2P + T, 65 x 85	141, 187
PKY16F735	Industrial sockets 16 A, 380-415 V AC, 3P + N + T, 90 x 100	141, 187
PKY32F723	Industrial sockets 32 A, 200-250 V AC, 2P + T, 90 x 100	141, 187
PKY32F725	Industrial sockets 32 A, 200-250 V AC, 3P + N + T, 90 x 100	141, 187
PKY32F733	Industrial sockets 32 A, 380-415 V AC, 2P + T, 90 x 100	141, 187
PKY32F735	Industrial sockets 32 A, 380-415 V AC, 3P + N + T, 90 x 100	141, 187

Canalis, the ideal offer to match with your needs

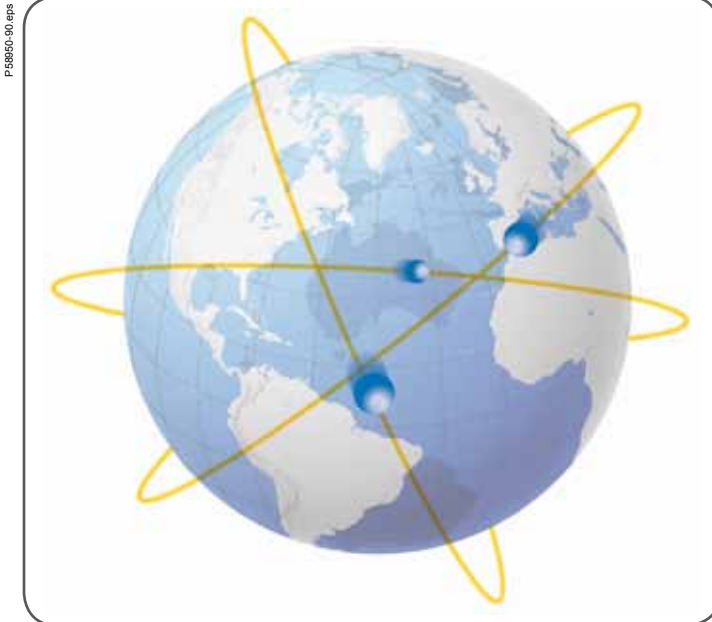

More than 70,000 km of Canalis busbar trunking has been sold around the world.

A total coordination with the Schneider Electric system

- Canalis is part of a comprehensive offering of Schneider Electric products designed to operate together. Our circuit breakers ensure overload and short-circuit protection. Tap-off units ensure installation upgradeability without production downtime and continuity of service. Our protection switchgear optimise switchboard functions.
- It guarantees and enhances the safety of equipment and people, and provides installation continuity of service, upgradeability and simplicity.
- This concept covers all low and medium voltage electrical distribution components.
- The result is an optimised electrical installation with even higher performance through full electrical, mechanical and communication compatibility.
- It is perfectly suited to traditional applications (factories, warehouses, etc.) and to the distribution of electrical power from the incoming transformer on through to all types of loads in offices, commercial premises, livestock production buildings, warehouses, parkings, etc.

Canalis, a comprehensive and consistent busbar trunking system for...

A new path for achieving your electrical installations

Canalis is part of a comprehensive offer of products that are perfectly coordinated to meet all medium and low voltage electrical distribution requirements.

All of these products have been designed to work together: electrical, mechanical and communication compatibility.

The electrical installation is thus both optimised and high-performance.



Optimum system performance is ensured by coordination between the protection circuit breakers and the busbar trunking used for decentralised distribution.



Decentralised electrical distribution with total coordination perfectly satisfies all your requirements in terms of safety, continuity of service, upgradeability and simplicity.



Decentralised electrical distribution with total coordination is the ideal solution for a wide range of applications including factories, warehouses, commercial premises, parkings, etc.



... lighting and power distribution in all types of buildings

+ Easier

• Coordination

Schneider Electric proposes coordinated busbar trunking and circuit breaker combinations for all your applications.

For typical applications with power ratings up to 630 kVA, a solution including the low-voltage electrical switchboard, circuit breakers and Canalis busbar trunking ensures an installation sized to handle all short-circuit levels encountered.

• Design

The electrical installation can be designed without knowing the exact location of the equipment to be supplied.

• Operation

Canalis opens the door to total upgradeability throughout the installation.

Tap-off units with standard performance circuit breakers can be installed at any point along the busbar trunking run.

+ Safer

• Decentralised distribution system

The combination of cascading and discrimination techniques guarantees optimum safety and continuity of service.

• Design


Total discrimination for enhanced protection as standard and at a lower cost. point de la canalisation.

• Operation

Any changes to your installation are carried out in complete safety.

Tap-off units can be plugged in and out with the trunking live. They are equipped with interlocking systems to prevent incorrect mounting.

Coordination guarantees their installation at any point on the busbar trunking system.

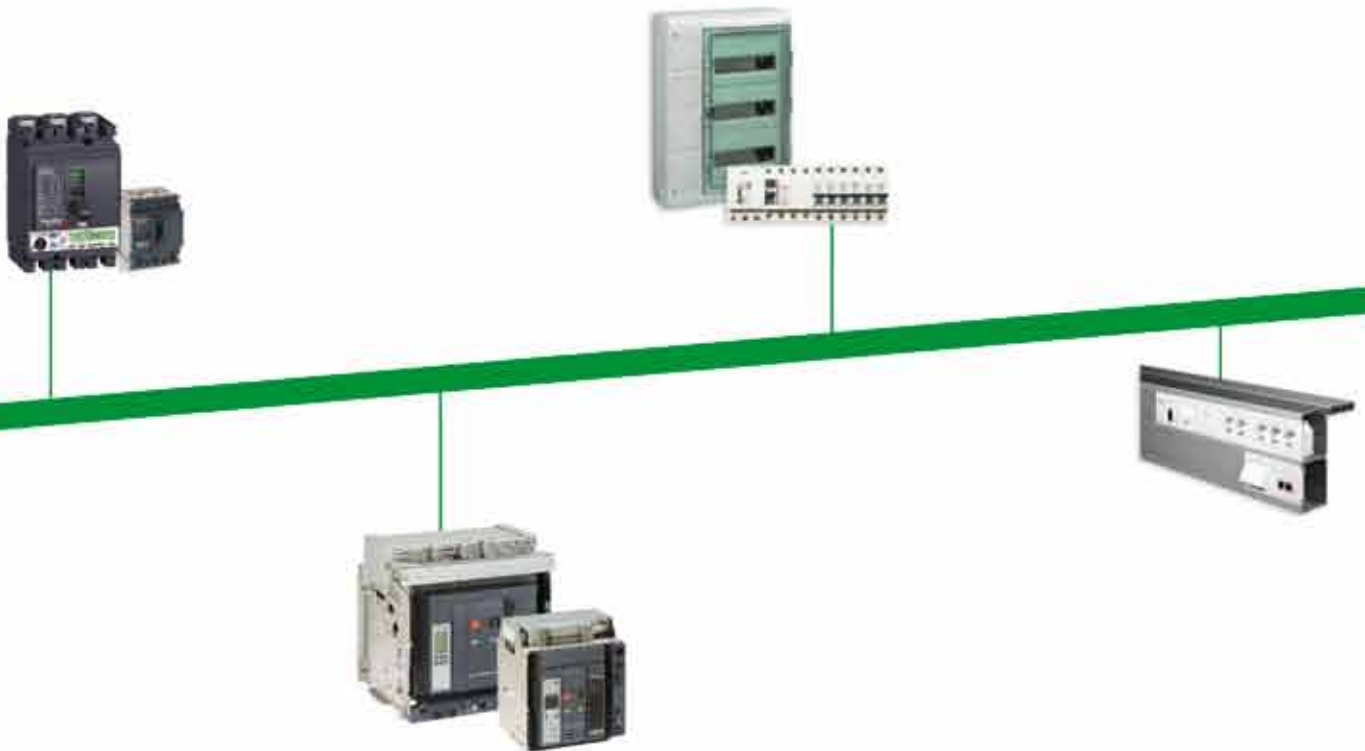

For each distribution system its own Canalis

Schneider Electric ...

offers different distribution systems to fit your operating needs.

Distribution systems

Centralised distribution

For all continuous processes


- Cement plants
- Oil and gas
- Petrochemicals
- Steel
- Paper, etc.

Centralised distribution offers

- Continuity of service
- Combined distribution of power, control and monitoring circuits
- Supervision, etc.

Our solutions

- Prisma Plus and Okken switchboards.

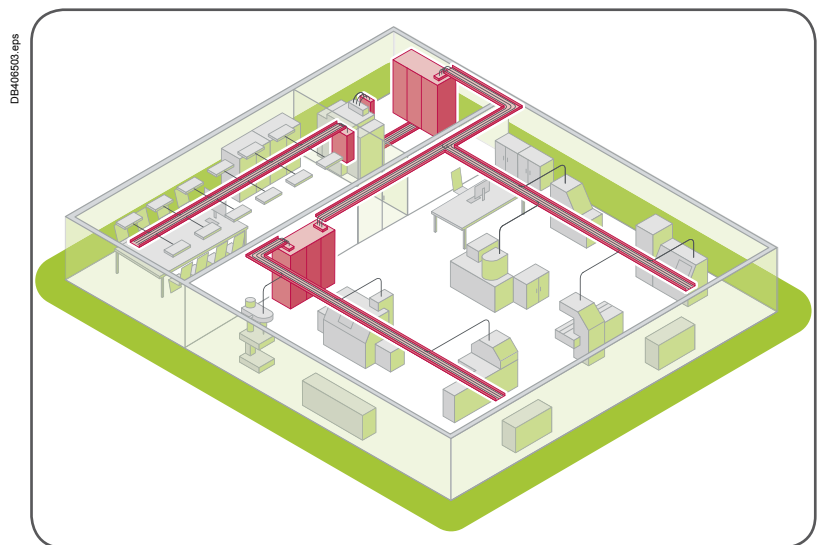

Decentralised distribution

For manufacturing industries


- Mechanical
- Textiles
- Lumber
- Injection moulding
- Electronics
- Pharmaceuticals
- Livestock, etc.

Decentralised distribution lets you

- Design installations without layout details
- Upgrade without shutting down production
- Get systems up and running sooner thanks to faster installation
- Generate savings depending on the number of loads.

Our solutions

- Prisma Plus switchboards.
- Canalis busbar trunking.

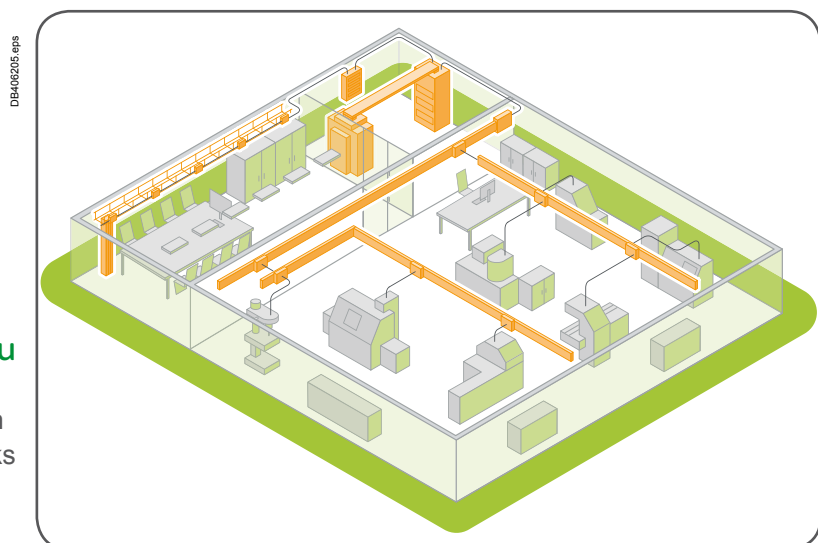

Combined distribution

Where the advantages of both centralised and decentralised distribution are required.

Commercial and service buildings

- Offices
- Stores
- Hospitals
- Exhibition halls, etc.

Infrastructures


- Airports
- Telecommunications
- Internet data centres
- Tunnels, etc.

Industrial facilities

- Pharmaceuticals
- Food processing, etc.

Our solutions

- Prisma Plus and Okken switchboards.
- Canalis busbar trunking.

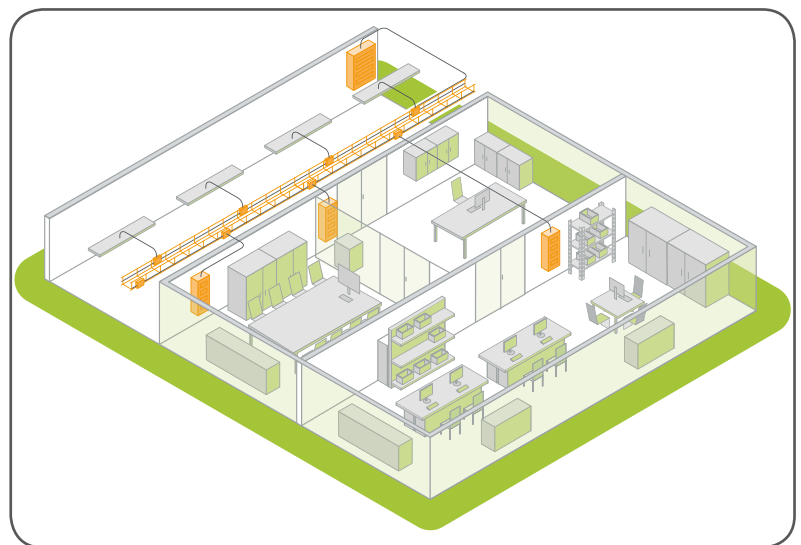

For each distribution system its own Canalis

The **Canalis** decentralised distribution concept.

Electrical power available at all points, throughout the installation

“**Exclusive features of the Schneider Electric system**”

Total coordination of the Schneider Electric system provides maximum safety of life and property, continuity of service, upgradeability and ease of installation. Total coordination is made easy by the tables in the "Selection Guide". They help you chose the right combination of circuit breakers and busbar trunking. Product characteristics are checked by calculations and tests carried out in our laboratories.


A competitive installation

Simplicity, upgradeability, safety and continuity of service and operation.

Savings start with installation


with tap-off points every 3 metres, Canalis busbar trunking reduces installation costs.

Given the low cost of adding new circuits, savings increase as the number of loads increases, a natural consequence of the growth of your business.

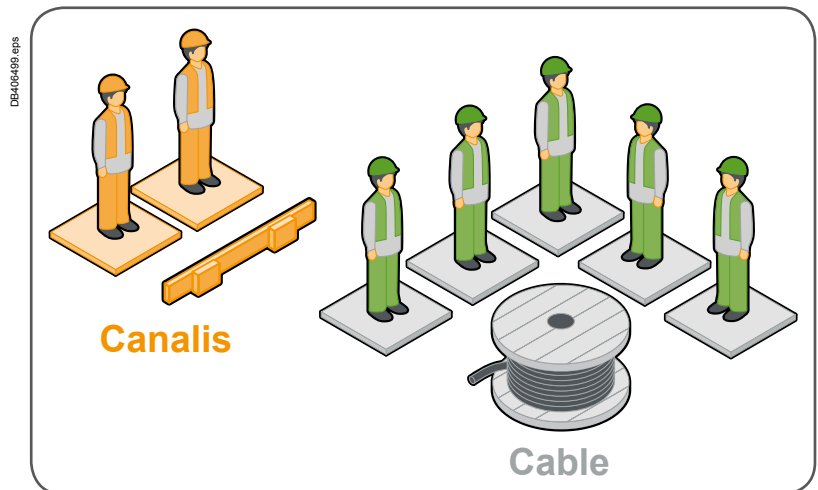

Comparative investment


of 400 A electric power system equipment.

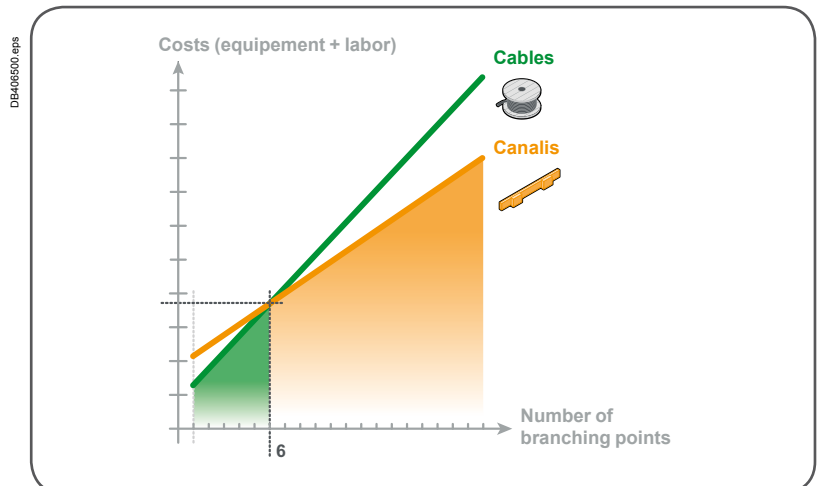

Upgradeable during operation

In decentralised distribution, evolving operating requirements and costs are integrated right from the start.

- The addition, relocation or replacement of load equipment can be carried out quickly, without de-energising the supply trunking or shutting down operation.
- The cost of making such changes is greatly reduced:
 - > loads are located close to supply points
 - > tap-off points are always available
 - > tap-units can be reused or new ones added quickly for load relocation or replacement needs.

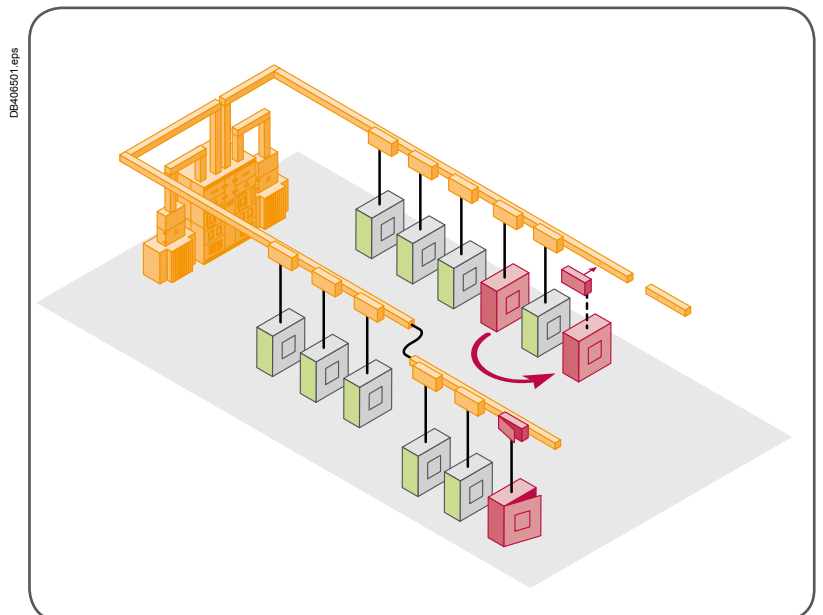

Reusable in the event of major changes

When making major modifications to your installation, the existing trunking can be easily dismantled and reused.

Canalis, an electrical distribution divided safely

Decentralised distribution for **small sites**

Maximum power available throughout the installation

The main busbar trunking distributes the full power of the source.

Continuity and flexibility

The large number of tap-off points makes it easy to supply new loads.

Anyone can connect and disconnect loads quickly and safely. These additions or modifications are carried out without shutting down the installation.


Thanks to rational design, the reliability of Canalis trunking installations is far less dependent on installation skills.

Canalis is an industrial product. Stringent inspection at all stages of production ensures a long service life.

Small sites (buildings < 5000 m²)

- ① Medium-power distribution.
- ② Low-power distribution.
- ③ Lighting.

DB417150.eps

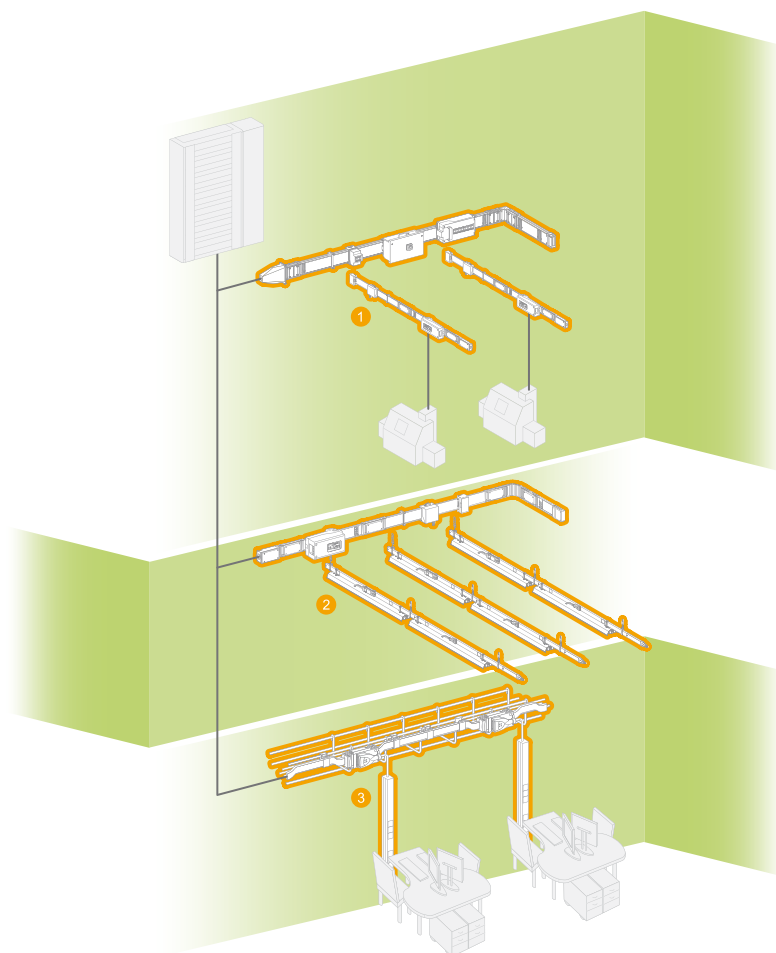

Decentralised distribution for **large** sites

The simplicity of decentralised distribution systems

The distribution system can be designed without detailed knowledge of load locations. Only the source and load characteristics are needed. Trunking is selected in advance with optimum results.

Large sites (buildings > 5000 m²)

- 1 Transformer to low-voltage switchboard supply.
- 2 High-power distribution.
- 3 Medium-power distribution.
- 4 Low-power distribution.
- 5 Lighting.

Easy upgrading


Canalis can easily adapt to installation modifications or extensions. Simply move an existing tap-off unit or add a new one at the desired location.

Total safety

Tap-units can be connected and disconnected without de-energising the trunking.

Changes can therefore be made safely on live installations:

- > protection against direct contact
- > mismatch prevention for tap-off units and automatic compatibility between the performance levels of tap-units equipped with circuit breakers and the prospective short-circuit current at the point of installation.

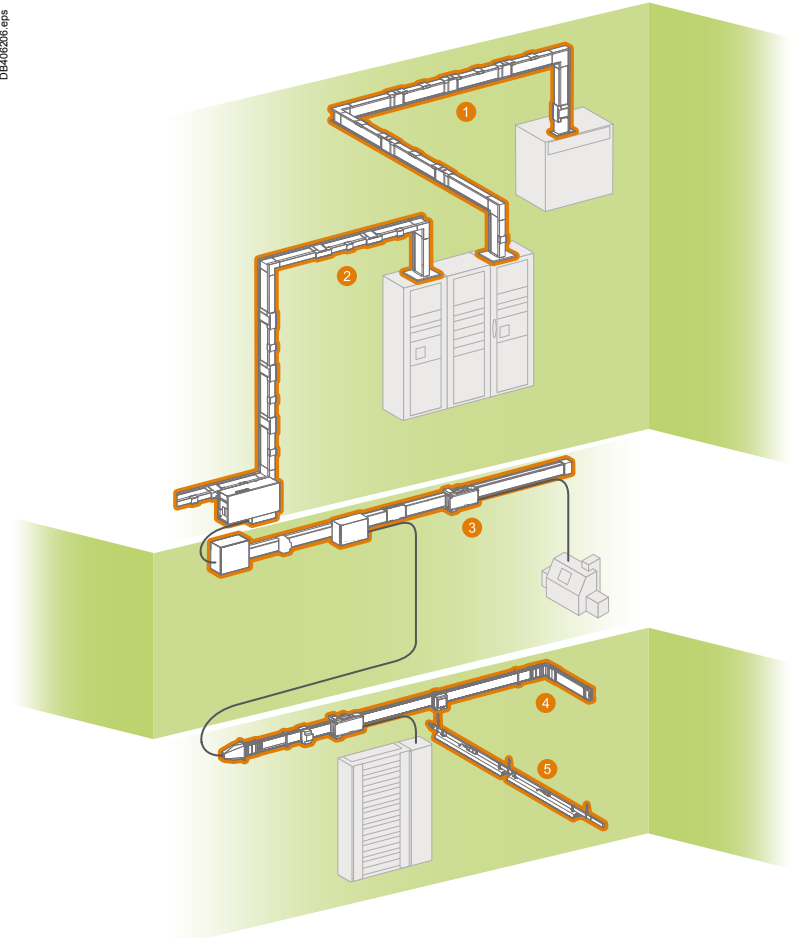

Canalis, in total harmony with the environment

✓ Safety of life and property

P12829-00eps



With Canalis, no toxic emission in case of fire

The busbar trunking has a low combustible load. Its construction uses very little consumable material and is **halogen free**. In the event of a fire, the busbar trunking does not emit any gas or toxic smoke.

The busbar trunking helps prevent the propagation of a fire through partition walls and floors.

Halogen-sensitive applications

- Public buildings (infrastructures, hospitals, schools, etc.).
- Buildings with evacuation difficulties (high-rises, ships, etc.) and service-activity buildings.
- Sensitive processes (production of electronic components, etc.).

Example:

Consequences of a fire in a 100 m² office with electrical distribution by cables. 200 kg of cables (i.e. 20 kg of PVC) produces:

- 4400 m³ of smoke.
- 7.5 m³ of hydrochloric acid.
- 3.7 kg of corroded steel.

Canalis contains no PVCs

When PVCs burn, they produce large amounts of smoke that can be a serious safety hazard.

- Reduced visibility:
 - > risk of panic
 - > complicates rescue work.
- Smoke toxicity:
 - > hydrogen chloride gas (highly toxic)
 - > carbon monoxide (danger of asphyxiation).

✓ Health

037148-50eps



Canalis reduces the risk of exposure to electromagnetic fields


According to the WHO (World Health Organisation), exposure to electromagnetic fields can be a health hazard starting at levels as low as 0.2 micro-Teslas and could represent a long-term risk of cancer. Some countries have created standards that stipulate limits (e.g. 0.2 µT at 1 metre in Sweden).

All electrical conductors generate magnetic fields proportional to the distance between them. The design of Canalis busbar trunking with tightly spaced conductors in a metal enclosure helps to considerably reduce radiated electromagnetic fields.

The electromagnetic field characteristics of Canalis busbar trunking are well-defined and measurements show that they are far below potentially dangerous levels.

You will find the magnetic induction values of our products on the "Characteristics" pages.

✓ Environment

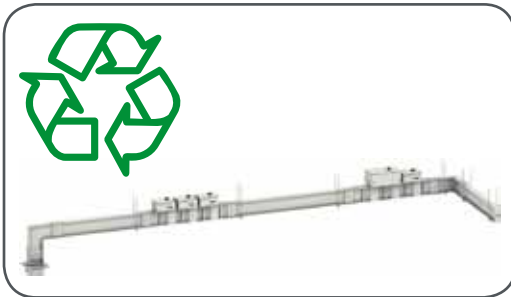

P020208-104_r_eps

Example:

1 kg of PVC generates 1 kg of waste.

Canalis is fully recyclable

- Canalis busbar trunking can be reused. Canalis busbar trunking is designed for a long service life and can easily be dismantled, cleaned and reused.
- All packaging materials can be recycled (cardboard or recyclable polyethylene film).
- All Canalis products are designed for safe end-of-life recycling. PVC, on the other hand, requires neutralisation of the hydrochloric acid produced using lime and generates dioxins that are extremely toxic.

Canalis helps conserve natural resources

The depletion of raw materials (copper, plastics, etc.) is one of our ongoing concerns.

For this reason, we have optimised the used of all materials used to make our busbar trunking.

- Reduction of dangerous or polluting materials. We design our products to meet future European directives.
- Reduction in the weight of insulating materials.
- Reduction in the use of plastics for improved fire performance: less energy released during combustion, thereby limiting propagation and facilitating extinction (lower calorific value).

✓ Conservation of natural resources

Canalis reduces your line losses by 20 %

Canalis divides your consumption of plastic by a factor of four

The cost of an electrical installation includes the initial investment for the equipment and its installation, the cost of maintenance and the cost of energy losses during operation.

The concept of decentralised distribution is a way to merge all the circuits in one and thus to reduce to the maximum the low cross-section lengths and the weight of insulating materials.

Example:

34 m of **Canalis KS 250 A** trunking equipped with fourteen 4-pole 25 A feeders.

Type of distribution	Insulation	Consumption
Decentralised 	 23 kg	 1600 Joules
Centralised 	 90 kg	 2000 Joules

K_s : diversity coefficient = 0.6

K_s : diversity coefficient = 0.6

Canalis is adapted for all types of buildings

✓ Parkings

Key points


- Security.
- Operating continuity.
- Energy management.



✓ Garages

Key points

- Evolutivity.
- Costs reduction.
- Operating continuity.

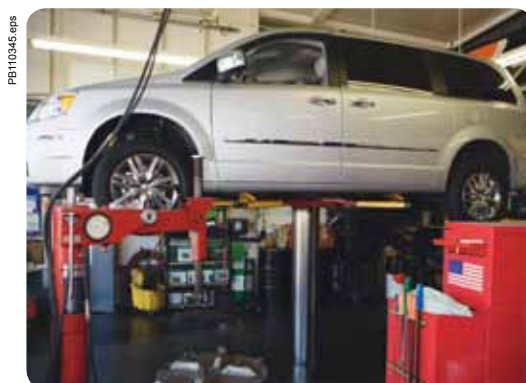

✓ Cruise ships

Key points

- Security.
- Flexibility.
- Competitivity.



✓ Logistic centers

Key points

- Security.
- Evolutivity.
- Costs reduction.



Canalis is adapted for all types of buildings

✓ Warehouses

Key points

- Easy to maintain.
- Costs reduction.
- Evolutivity.



✓ Livestock production buildings

Key points

- Security.
- Easy to maintain.
- Evolutivity.



✓ Hypermarkets

Key points

- Operating continuity.
- Security.
- Evolutivity.



✓ Offices

Key points

- Comfort.
- Security.
- Energy savings.



Canalis, a complete range

Panorama of Canalis Lighting solutions

Busbar trunking for lighting and low power distribution from 25 to 40 A IP55

PD202217_F2



PD202219_I



Rated service current	Permissible rated peak current	Rated insulation voltage	Color
Inc	Ipk	Ui	
KBA			
25 A	4.4 kA	690 V	Pre-lacquered white (RAL9003)
40 A	9.6 kA		
KBB			
25 A	4.4 kA	690 V	Pre-lacquered white (RAL9003)
40 A	9.6 kA		

Flexible busbar trunking for lighting and low power distribution 20 A IP55

PD202216_eps



Rated service current	Permissible rated peak current	Rated insulation voltage	Color
Inc	Ipk	Ui	
KDP			
20 A	3.6 kA	690 V	-

Panorama of Canalis Power solutions

Power distribution from 40 to 160 A IP55

PD202221_FKN



Rated service current	Permissible rated peak current	Rated insulation voltage	Color
Inc	Ipk	Ui	
KN			
40 A	6 kA	500 V	Pre-lacquered white (RAL9001)
63 A	11 kA		
100 A	14 kA		
160 A	20 kA		

Line components				Branching points		Accessories
Length of components	Number of conductors	Branching centre to center distance		Protection type		
2 m and 3 m	2 or 4 + PE	0.5 m, 1 m or 1.5 m	L + N + PE or 3L + N + PE (10/16 A) pre-cabled or to be cabled, with phase selection or fixed polarity, with lighting control	With fuses or without protection	<ul style="list-style-type: none"> > Flexible components > Fixing devices with quick adjustment > Remote control bus (DALI, DSI) > Cable ducts 	
2 m and 3 m	Single circuit 2 or 4 + PE Dual circuit 2 + 2 + PE 2 + 4 + PE 4 + 4 + PE	0.5 m or 1 m	L + N + PE or 3L + N + PE (10/16 A) pre-cabled or to be cabled, with phase selection or fixed polarity, with lighting control	With fuses or without protection	<ul style="list-style-type: none"> > Flexible components > Fixing devices with quick adjustment > Remote control bus (DALI, DSI) > Cable ducts 	

Line components				Branching points		Accessories
Length of components	Number of conductors	Branching centre to center distance		Protection type		
24 m roll to 192 m winder	2 or 4 + PE	1.2 m to 3 m	-	With fuses or without protection	<ul style="list-style-type: none"> > Fixing devices for all supports > Factory-built connections 	

Line components				Branching points		Accessories
Length of components	Number of conductors	Branching centre to center distance		Protection type		
2 m and 3 m	4 + PE	0.5 m, 1 m or 1.5 m	16 A to 63 A (plug-in)	Units for modular circuit breakers, fuses and sockets	<ul style="list-style-type: none"> > Flexible components > Fixing devices with quick adjustment > Remote control bus > Cable ducts > Installation accessories 	

Canalis, a complete range

Panorama of Canalis Power solutions (cont.)

Horizontal and vertical distribution from 100 to 1000 A

IP55

PD202222_1W



Rated service current	Permissible rated peak current	Rated insulation voltage	Color
Inc	l _{pk}	Ui	
KS			
Aluminium:	Copper:	690 V	Pre-lacquered white (RAL9001)
100 A			
160 A	15.7 kA		
250 A	22 kA		
400 A	28 kA		
500 A	49.2 kA		
630 A	55 kA		
800 A	67.5 kA		
1000 A	78.7 kA		

Power transmission and distribution from 800 to 5000 A

IP55

PD202088-74_J




Rated service current	Permissible rated peak current	Rated insulation voltage	Color
Inc	l _{pk}	Ui	
KT *			
Aluminium:	Copper:	1000 V	Pre-lacquered white (RAL9001)
800 A			
1000 A	64 kA		
1250 A	73 kA		
1600 A	143 kA		
2000 A	143 kA		
2500 A	187 kA		
3200 A	242 kA		
4000 A	248 kA		
	248 kA		
	264 kA		
	264 kA		
	264 kA		
	264 kA		

* Canalis KT range is available on Schneider-electric.com or catalogue ref. DEBU021EN

Power transmission for outdoor and harsh environment from 800 to 6300 A

IP68

DE410226

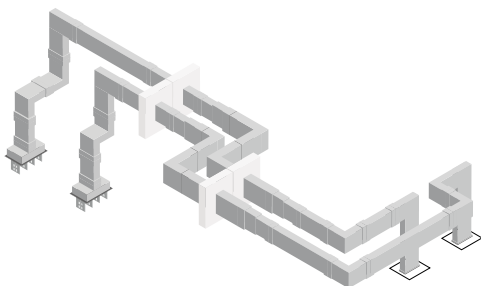

Rated service current	Permissible rated peak current	Rated insulation voltage	Color
Inc	l _{pk}	Ui	
KR *			
	Aluminium:	Copper:	1000 V
800 A	56 kA	-	
1000 A	56 kA	80 kA	
1250 A	117 kA	-	
1350 A	-	80 kA	
1600 A	117 kA	143 kA	
2000 A	143 kA	176 kA	
2500 A	176 kA	176 kA	
3200 A	220 kA	220 kA	
4000 A	220 kA	220 kA	
5000 A	220 kA	275 kA	
6300 A	-	275 kA	

* Canalis KR range is available on Schneider-electric.com or catalogue ref. DEBU031EN

Line components			Branching points		Accessories
Length of components	Number of conductors	Branching centre to center distance		Protection type	
3 m, 5 m and additional or customized components	4 + PE	0.5 m or 1 m on each side	25 A to 400 A (plug-in)	Units for circuit breakers (modular, Compact NSX), fuses, sockets, Transparent Ready	<ul style="list-style-type: none"> > Riser ducting offer > Fixing devices with quick adjustment > Cable ducts > Installation accessories > Fire barriers

Line components			Branching points		Accessories
Length of components	Number of conductors	Branching centre to center distance		Protection type	
2 m and 4 m	3P + PE 3P + N + PE 3P + N + PER	0.5 m or 1 m	25 A to 630 A (plug-in) 400 A to 1250 A (bolt-on)	Units for circuit breakers (modular, Compact NSX), fuses, sockets, Transparent Ready	<ul style="list-style-type: none"> > Power supply ends > Direction change angles and T-pieces > Fixing devices and fuses

Line components			Branching points		Accessories
Length of components	Number of conductors	Branching centre to center distance		Protection type	
Up to 3 m	3L 3L + N or 3L + PE or 3L + PEN 3L + N + PE	-	-	-	<ul style="list-style-type: none"> > Power supply ends > Direction change angles and T-pieces > Fixing devices > Fire resistant elements

Canalis tools and services



Applications

Canalis



> Download the app from the Apple Store



> Download the app from the Google Play Store

Canalis & Argus



> Download the app from the Apple Store



> Download the app from the Google Play Store



Solution for Data Center



iBusway for Data Center catalogue

> DEBU028EN

iBusway for Data Center brochure

> DEBU027EN



Solution for lighting management



iBusway for lighting management: Canalis-DALI technical installation guide

> DEBU032EN

iBusway for lighting management brochure

> DESWED112002EN

iBusway for lighting management catalogue

> DEBU035EN

Lighting technical guide

> A9GT15EC



Application sheets/Technical guides



In cruise ships

> DESWED105014EN

In car parks

> DESWED108011EN

In livestock production buildings

> DESWED105010EN

In greenhouses

> DESWED105013EN

In logistic centres

> DESWED105011EN

In garages

> DESWED106004EN

Automotive industry guide

> KD0C98CTAAUEN

Hypermarkets guide

> KD0C98CTAHYEN



Download a wide selection of Cahiers Techniques from www.schneider-electric.com.

<i>Index</i>	3
<i>Introduction</i>	9
Design guide	
Simplified design guide for lighting distribution	30
Lighting-technology review	30
Installation	34
Selection of Canalis busbar trunking	35
Determining the operational current	36
Overload protection	37
Short-circuit protection	39
Check on voltage drop	40
Simplified design guide for power distribution	42
Power distribution via Canalis	42
Simplified design guide	44
Determining the degree of protection	44
Characteristics	
Canalis KDP, 20 A	46
Busbar trunking for lighting and power socket distribution	46
Canalis KBA, 25 and 40 A	47
Busbar trunking for lighting and power socket distribution	47
Canalis KBB, 25 and 40 A	48
Busbar trunking for lighting and power socket distribution	48
KBC tap-off units, KDP connections	49
Canalis KN, 40 to 160 A	50
Busbar trunking for low-power distribution	50
Canalis KS, 100 to 1000 A	52
Busbar trunking for medium-power distribution	52
Design and quotation tools	
Tools and assistance by your side	54
<i>Canalis KDP</i>	57
<i>Canalis KBA</i>	79
<i>Canalis KBB</i>	99
<i>Canalis KN</i>	121
<i>Canalis KS</i>	153
<i>Canalis KS riser</i>	205
<i>Canalis KT</i>	225
<i>Technical specifications</i>	231
<i>Maintenance</i>	239
<i>Recommendations for special applications</i>	243
<i>Catalogue numbers</i>	273
<i>Canalis worldwide</i>	279


Simplified design guide for lighting distribution

Lighting-technology review

Selection of lighting levels

The table below indicates the necessary illumination in lux for different tasks. In general, a higher level of illumination is required when:


- work involves small parts
- objects are dark
- the task requires a high level of visual attention
- work is carried out at high speeds.

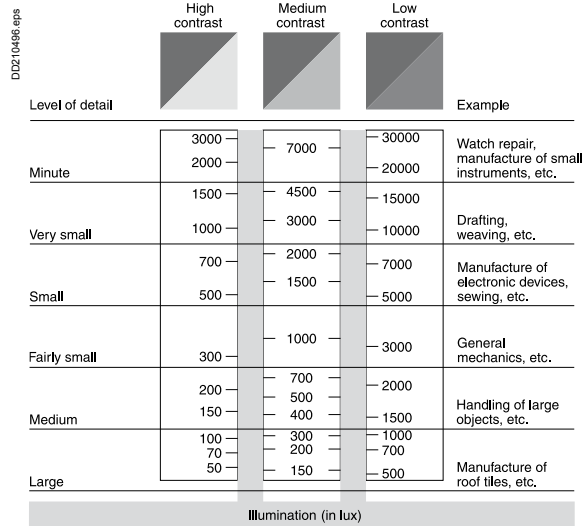

Selection of light sources


Visual comfort depends on the level of illumination (in lux) and the colour temperature (in degrees Kelvin).

The Kruithof diagram below can be used to make an optimum choice. The blue zone represents a comfortable environment.

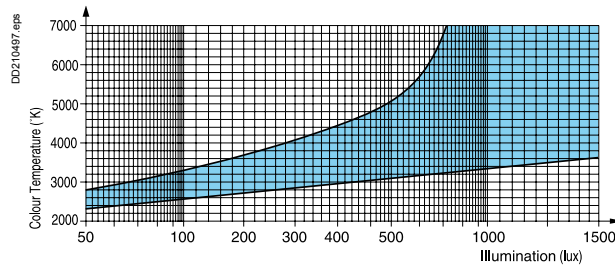

The table below sums up the essential characteristics of the main types of light source.

Type of light source	Colour temperature (°K)	Length of tubes (m)	Power (W)	Luminous flux (Lm)	
Incandescent lamps	2800 to 3000	-	75	850	
		-	150	2100	
		-	300	4750	
		-	750	13500	
White industrial fluorescent tube	4250 to 4500	With starter	1.20	40	3200
			1.50	65	5100
			1.50	80	5900
		Instant start	1.20	40	2900
			1.50	65	4800
			2.40	105	8000
Mercury vapour	3300 to 4300	With starter	-	125	6500
			-	250	14000
			-	400	24000
			-	700	42000
			-	1000	60000

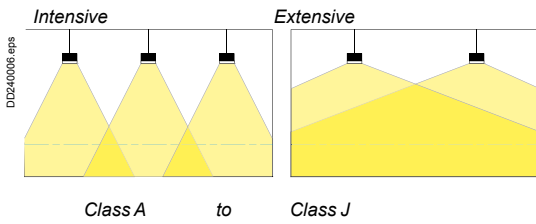

Selection of the lighting system

Direct lighting is used in offices, workshops and factories.

Semi-direct and indirect lighting is generally reserved for exhibitions, auditoriums, etc.

On industrial premises, direct lighting is generally used, from the most intensive to the most extensive, i.e. from class A to class J according to standards UTE 71-120 and 121.


Tables A and B determine the photometric class of luminaires depending on the rating of the sources and the illuminance.

Table A - Lighting in offices

Illuminance in lux	Fluorescent tubes		
	40 W 1.20 m	65 W 1.50 m	105 W 2.40 m
0 to 600	E	E	-
800	D	D	-
1000	D	D	C
1200	C	C	C
1500	C	C	C

Table B - Lighting in workshops and factories


Illuminance in lux	Fluorescent tubes				
	40 W 1.20 m	65 W 1.50 m	80 W 1.50 m	105 W 2.40 m	Other lamps
0 to 200	G	G	-	-	E
400	F	F	-	-	D
600	E	E	-	-	C
800	D	D	-	-	C
1000	D	D	C	C	B
1200	C	C	C	C	B
1500	C	C	C	C	A



Distribution of light sources

The maximum distance between two luminaires is indicated in the table below, taking into account the photometric class and the height h.


Luminaire class	Maximum distance between two luminaires
A	$e = 0.90 \times h$
B	$e = 1.00 \times h$
C	$e = 1.10 \times h$
D	$e = 1.20 \times h$
E	$e = 1.30 \times h$
F	$e = 1.40 \times h$
G	$e = 1.45 \times h$
H	$e = 1.50 \times h$
I	$e = 1.50 \times h$
J	$e = 1.50 \times h$

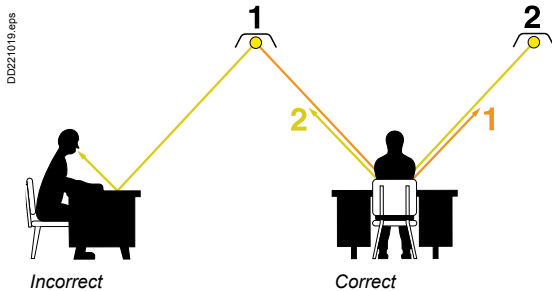

Distribution is determined by the position of work stations (caution concerning reflection), which in turn determines the number of luminaires, on the condition that the total luminous flux is sufficient (see next page).

Simplified design guide for lighting distribution

Lighting-technology review

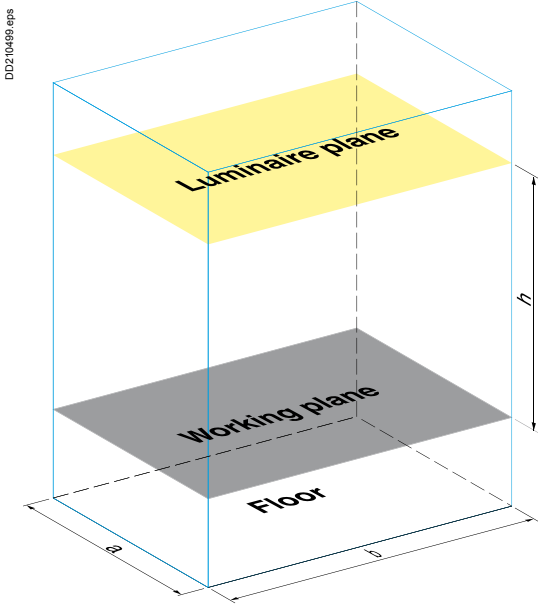

Total luminous flux

The total luminous flux required for the desired illuminance in a room is provided by the equation below:

$$F = \frac{E \times S \times d}{u}$$

F: Total luminous flux required (in lumens).

(Lumen: quantity of light per second reaching the working plane).

E: Illuminance (in lux).

(1 lux = 1 lumen/m²).

S: Surface area of room in m².

d: Depreciation factor taking into account ageing of light sources and of the room (1.3 to 1.5).

u: The walls and ceiling absorb a part of the flux emitted by the light sources. The utilisation factor is the ratio between the luminous flux reaching the working plane and that emitted by the lamps.

■ It depends on:

□ room proportions according to the K index:


$$K = \frac{a \times b}{h(a + b)}$$

□ reflectance factors of the walls and ceiling,

□ flux distribution of the luminaires.

Determining the utilisation factor “u”

Type of lighting	Room index K	Reflectance factor					
		Ceiling 70 %			Ceiling 50 %		
		Walls 70 %	50 %	10 %	Walls 70 %	50 %	10 %
Direct lighting	0.6	0.49	0.42	0.39	0.46	0.42	0.39
Polished-aluminium industrial reflector for mercury-vapour lamps	0.8	0.58	0.51	0.48	0.54	0.51	0.48
	1	0.64	0.56	0.53	0.59	0.55	0.53
	1.25	0.69	0.60	0.58	0.62	0.60	0.57
	1.5	0.73	0.64	0.61	0.65	0.63	0.61
	2	0.78	0.68	0.66	0.69	0.67	0.65
	2.5	0.81	0.71	0.69	0.72	0.70	0.69
	3	0.84	0.73	0.72	0.73	0.72	0.71
	4	0.87	0.75	0.74	0.75	0.74	0.73
5	0.88	0.76	0.75	0.75	0.76	0.75	0.74
Direct lighting	0.6	0.31	0.24	0.20	0.28	0.23	0.20
Lacquered sheet-metal industrial reflector for two fluorescent tubes	0.8	0.39	0.31	0.28	0.36	0.31	0.27
	1	0.45	0.37	0.33	0.41	0.36	0.33
	1.25	0.51	0.42	0.38	0.46	0.41	0.38
	1.5	0.56	0.46	0.43	0.50	0.45	0.42
	2	0.62	0.52	0.49	0.55	0.51	0.48
	2.5	0.67	0.56	0.53	0.58	0.55	0.53
	3	0.70	0.59	0.56	0.61	0.58	0.56
	4	0.74	0.63	0.61	0.64	0.62	0.60
5	0.76	0.65	0.63	0.65	0.64	0.62	

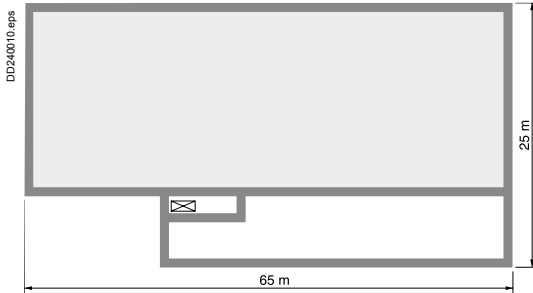


Example of a design project

Preliminary design of lighting for a factory:

- length: 65 m
- width: 25 m
- height: 6 m.

Selection of light sources taking into account the long daily use and the luminaire installation height set at 5 metres.

Luminaires in photometric class E are selected (table B, page 31).

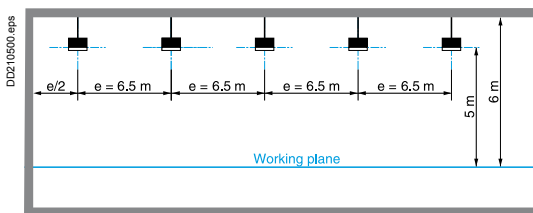

Distribution of luminaires

Distance between two class E luminaires: $e = 1.30 \times h = 1.30 \times 5 = 6.5 \text{ m}$.

Number of luminaires over the length: $65 / 6.5 = 10$ luminaires.

Number of luminaires over the width: $25 / 6.5 = 3.8$ (i.e. 4 rows of 10 luminaires).

Total luminous flux:

$$F = \frac{E \times S \times d}{u}$$

E: Illuminance: 250 lux.

S: Surface area: $65 \times 25 = 1\,625 \text{ m}^2$.

d: Depreciation factor: 1.5.

u: Utilisation factor: the table on page 32 gives "u" directly as a function of K.


$$K = \frac{a \times b}{h(a + b)} = \frac{25 \times 65}{5(25 + 65)} = 3.6 \text{ that we round to } 4$$

Given a reflectance factor of 50 % for the ceiling and 10 % for the walls and the use mercury-vapour lamps:

u = 0.73.

Total luminous flux:

$$F = \frac{E \times S \times d}{u} = \frac{250 \times 1625 \times 1.5}{0.73} = 834760 \text{ lumens}$$

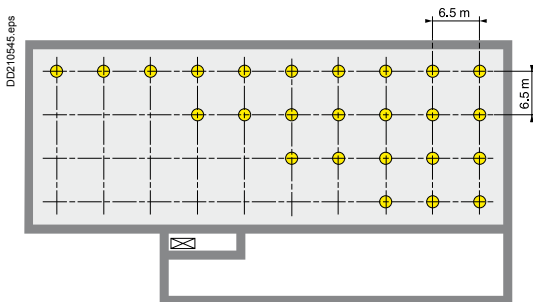

Rating of each source (f):

$$f = \frac{F}{\text{Number of luminaires}} = \frac{834760}{40} = 20869 \text{ lumens}$$

The table on page 30 allows you to choose 400 W (24 000 lumens) mercury-vapour lamps which provide a lighting level of slightly above 250 lux.


Note: if changes in workshop layout require modifications in the illumination on the working plane, Canalis makes it easy to add or remove luminaires.

Simplified design guide for lighting distribution Installation

Due to its flexible design, KDP busbar trunking simplifies routing and thus reduces design and installation times.


It is the optimum solution for installations with false ceilings or floors.

KBA and KBB busbar trunking is ideal where the building structure cannot support the luminaires. They offer an IP55 degree of protection which means they can be installed in all types of buildings.

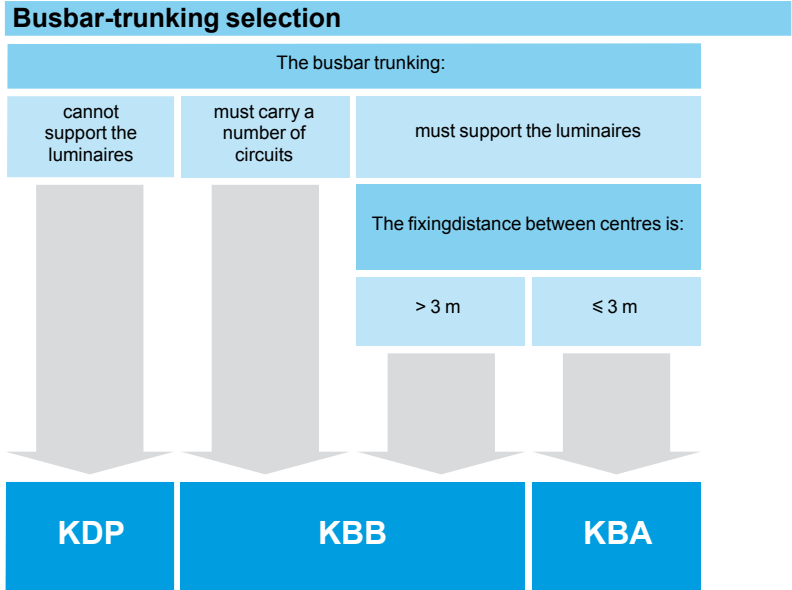

Fixing distance

KBA and KBB busbar trunking

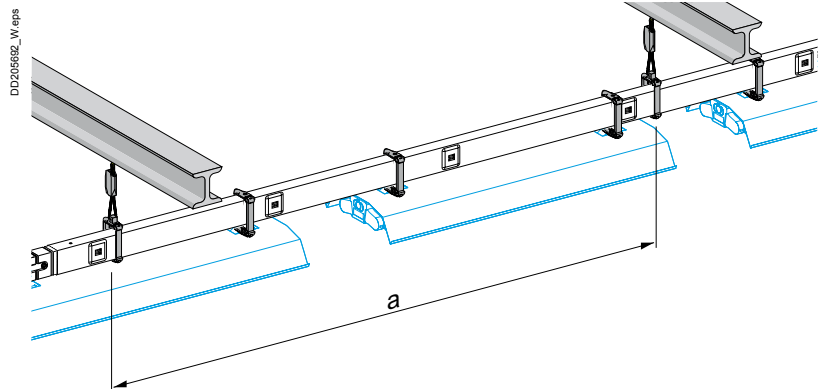

The fixing distance for KBA and KBB busbar trunking depends on the number and weight of the luminaires, as well as the building structure. The table below indicates the maximum permissible load (kg) between two fixing points for a deflection of 1/500. If the load is concentrated between two fixing points (mercury-vapour lamps), apply a coefficient of 0.6 to the values.

Maximum load (kg)											
Type of busbar trunking	tap-offs distance (m)	Fixing distance a (m)									
		2	2.5	3	3.5	4	4.5	5	5.5	6	
KBA	1	34	22	15	no load						
	0.5	29	19	13	no load						
KBB	1 circuit	60	60	48	35	27	21	17	no load		
	2 circuits	60	51	41	30	23	18	17	no load		


Selection of Canalis busbar trunking

The tables below indicate the possible fixing distances in metres for a deflection of 1/350, depending on the type of luminaire used and the installation method (trunking installed edgewise).

Industrial reflector type fluorescent luminaires without protection grill


Industrial reflector type fluorescent luminaires with protection grill

Dust and damp-proof industrial reflector type fluorescent luminaires



Power (W)	Unit weight (kg)			Possible spacing (metre)					
	Without protection grill	With protection grill	Dust and damp-proof	KBA	KBB	KBA	KBB	KBA	KBB
1 x 36	4.20	5.20	3.30	3.00	5.00	3.00	5.00	4.00	6.00
1 x 58	5.30	6.50	4.20	3.00	5.00	3.00	5.00	4.00	6.00
2 x 36	4.90	5.90	5.20	3.00	5.00	3.00	5.00	4.00	6.00
2 x 49	4.90	5.90	5.20	3.00	5.00	3.00	5.00	3.00	5.00
2 x 58	6.30	7.50	5.39	3.00	5.00	3.00	5.00	4.00	6.00


Mercury-vapour luminaires




Power (W)	Unit weight (kg)	Possible spacing (metre)			
		KBA	KBB	KBA	KBB
250	6.00	3.00	5.00	4.00	6.00
	8.50	3.00	5.00	4.00	6.00
	10.00	3.00	5.00	4.00	6.00
400	6.50	3.00	5.00	4.00	6.00
	9.00	3.00	5.00	4.00	6.00
	11.00	3.00	5.00	4.00	6.00

Simplified design guide for lighting distribution

Determining the operational current

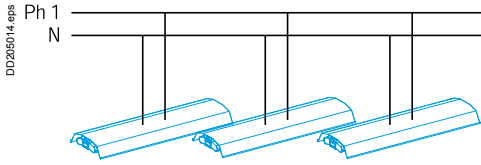

Ph + N distribution

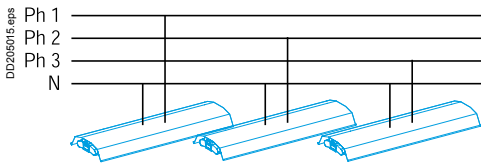

3Ph + N balanced distribution

The tables below show the **operational current** as a function of the type and number of luminaires installed on a **single-phase line** (L + N) supplied with 230 V AC current. For a three-phase + N (AC, 400 V between phases) line, with equivalent phase current, the number of luminaires is three times higher.

Procedure:

- identify the type of luminaire (e.g. 2 x 58 W compensated fluorescent)
- on the corresponding line, select the number (or next highest) of installed luminaires (e.g. 26 if there are 23 luminaires)
- at the bottom of the table, read the corresponding operational current (e.g. 20 A).

Industrial reflector type fluorescent luminaires													
Type of ballast	Power (W)	Number of luminaires on the line											
		Single-phase line					Three-phase + N line						
Electronic	1 x 36	33	53	66	-	-	99	-	-	-	-		
	1 x 58	25	40	50	62	-	75	-	-	-	-		
	2 x 36	21	33	42	52	67	-	63	99	-	-	-	
	2 x 49	20	32	40	50	64	80	80	96	120	-	-	-
	2 x 58	13	20	26	32	41	52	39	60	78	96	-	-
Ferro-magnetic	1 x 36	22	35	44	55	-	-	66	105	-	-	-	
	1 x 58	14	22	28	35	45	-	42	66	84	-	-	
	2 x 36	11	17	22	27	35	44	33	51	66	81	-	
	2 x 58	7	11	14	17	22	28	21	33	42	51	66	84
	Operational current (A)	10	16	20	25	32	40	10	16	20	25	32	40

Mercury-vapour luminaires												
Type of ballast	Power (W)	Number of luminaires on the line										
		Single-phase line					Three-phase + N line					
Compensated	250	7	11	14	17	22	21	33	42	51	66	
	400	4	6	8	10	13	12	18	24	30	39	
Non-compensated	250	4	7	9	11	14	12	21	27	33	42	
	400	3	4	6	7	9	9	12	18	21	27	
Operational current (A)		10	16	20	25⁽¹⁾	32	16	20	25⁽¹⁾	32		
Type of busbar trunking		20 A KDP					40 A KBA	25 A KBA	or KBB		40 A KBA	or KBB

High-pressure sodium-vapour luminaires												
Type of ballast	Power (W)	Number of luminaires on the line										
		Single-phase line					Three-phase + N line					
Compensated	150	11	17	22	27	35	33	51	66	81	105	
	250	7	11	14	17	22	21	33	42	51	66	
	400	4	7	9	11	14	12	21	27	33	42	
Non-compensated	150	5	8	11	13	17	15	24	33	39	51	
	250	3	5	6	8	10	9	15	18	24	30	
	400	2	3	4	5	6	3	9	12	15	18	
Operational current (A)		10	16	20	25⁽¹⁾	32	10	16	20	25⁽¹⁾	32	
Type of busbar trunking		20 A KDP					40 A KBA	25 A KBA	or KBB		40 A KBA	or KBB

- Then refer to:
 - page 38 to determine the type of busbar trunking and cables sizes as a function of type of protection (circuit breaker or fuse),
 - page 41 to check voltage drop in the busbar trunking and the supply cable.

(1) For this type of luminaire, for 25 A and higher, select a 40 A KBA or KBB to take into account the overcurrent during starting.

Overload protection

Precalculating XLPE or PVC cables + Canalis

Drawn from the Ecodial low-voltage installation-calculation software, the information provided here assists in defining busbar trunking (cables and Canalis) and their protection in compliance with installation standards and calculation guide.

Protection of the main busbar trunking (cable + Canalis)

- The tables below may be used to determine:
 - the rated current (I_n) or the setting current (I_r) of the overload-protection devices,
 - the rated current (I_{nc}) of Canalis,
 - the thermal minimum cross-section of cables.
- These three characteristics are defined for the following installation conditions:
 - maximum ambient temperature 30 °C,
 - cables placed in cable trays. Layout as a single horizontal layer or in groups of 2 or 3 cores.

Tap-off protection

Canalis tap-offs must have overload protection. The tap-off is created using a fused tap-off unit to protect the cable (C_3) and the device against short-circuits. This protection offers good discrimination during operation (continuity of service, trouble-shooting, etc.).

For lighting, it may be useful to take advantage of the **possibilities for dispensing with or remotely locating** the protection, offered by standard IEC 60-364-4-43 (§ 433 and 434) and summarised in the texts below, drawn from UTE C 15-107. The tap-off is created using a pre-wired tap-off unit.

Supply to devices not subject to overloads

Exemption possibilities:

- the C_3 cable (connection to the device) does not need to be protected against overloads (NF C 15-100, 473.1.2b) or short-circuits (NF C 15-100, 473.2.2.1) because the cable:
 - is not subject to overload currents,
 - does not have tap-offs or power sockets,
 - is less than or equal to three metres,
 - is designed to reduce to a minimum the risk of short-circuits,
 - is not located near any flammable material.



Example: *luminaires, convectors, etc.*

Supply to devices with built-in overload protection

Exemption possibilities:


- the device P_2 protecting C_3 cable against overloads is not positioned at the head (NF C 15-100, 473.1.1.2 b) of C_3 because the latter:
 - does not have tap-offs or power sockets,
 - is less than or equal to three metres,
 - is designed to reduce to a minimum the risk of short-circuits,
 - is not located near any flammable material.




NB: P_1 - P_2 are short-circuit protection devices.

Simplified design guide for lighting distribution

Overload protection

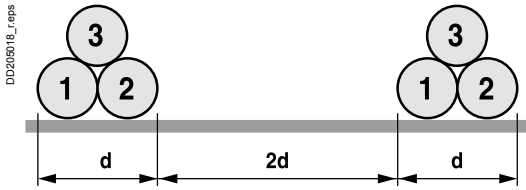

Cables spaced in cable trays.



Cables touching in cable trays.

Precalculating XLPE or PVC cables + Canalis

The tables below determine, as a function of the type of overload protection (circuit breaker or fuse):

- the type of busbar trunking required
- the size of supply cables (in mm²) as a function of the installation method, for all conductor configurations.

Protection by iC60 (curve C) modular circuit breaker								
Type of busbar trunking	Operat. current Circuit-breaker rating (A)	XLPE cable			PVC cable			
		Spaced	Touching (number of cables)		Spaced	Touching (number of cables)		
			2 to 5	6 or more		2	3	4 or more
20 A KDP	10	1.5	1.5	1.5	1.5	1.5	1.5	1.5
25 A KBA	16	1.5	1.5	1.5	1.5	2.5	2.5	2.5
25 A KBB	20	1.5	2.5	2.5	2.5	2.5	4	4
25 A KBA	25	2.5	4	4	2.5	4	4	6
25 A KBB		2.5 ⁽¹⁾	2.5 ⁽¹⁾					
40 A KBA	32	4	6	6	4	6	6	10
40 A KBB		2.5 ⁽¹⁾	4 ⁽¹⁾	4 ⁽¹⁾				
	40	4	6	10	6	10	10	10
				6 ⁽¹⁾				

Protection by gG fuses								
Type of busbar trunking	Rated current (A)	XLPE cable			PVC cable			
		Spaced	Touching (number of cables)		Spaced	Touching (number of cables)		
			2 to 5	6 or more		2	3	4 or more
20 A KDP	10	1.5	1.5	1.5	1.5	1.5	1.5	1.5
25 A KBA	16	1.5	2.5	2.5	2.5	2.5	2.5	4
25 A KBB		1.5 ⁽¹⁾						
	20	2.5	2.5	2.5	2.5	4	4	6
		1.5 ⁽¹⁾						
25 A KBA	25	2.5	4	6	4	6	6	6
25 A KBB				4 ⁽¹⁾				
40 A KBA	32	4	6	6	6	6	10	10
40 A KBB		2.5 ⁽¹⁾	4 ⁽¹⁾					


(1) Permissible cable cross-sections for single-phase distribution.

Short-circuit protection

Determining the prospective short-circuit current at the origin of the Canalis

There are two possible situations:

- the busbar trunking for lighting is supplied by a secondary switchboard.

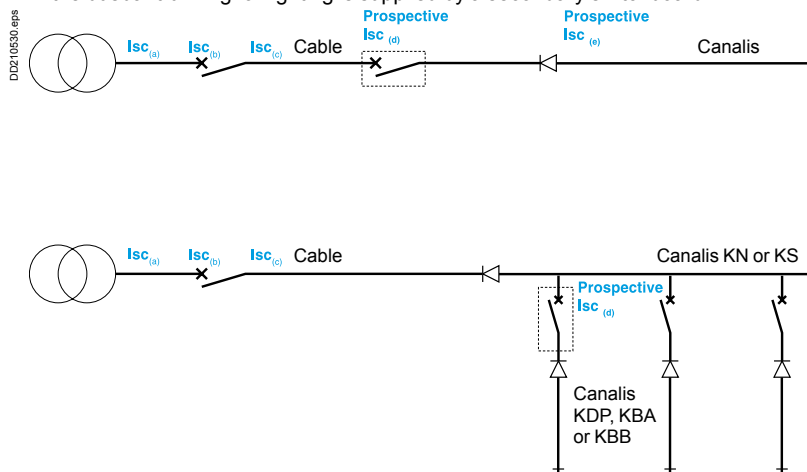

I_{sc(a)}: rms short-circuit current across the transformer terminals.

Rms I_{sc(a)} values across the transformer terminals (U = 400 V)

Power (kVA)	50	100	150	200	250	315	400	500	630	800	1000	1250	1600
I_{sc(a)} (kA)	1.8	3.6	5.7	7.2	8.9	11.2	14.2	17.6	22.1	24.8	27.8	31.5	36.7

I_{sc(b)}: downstream short-circuit current, less than I_{sc(a)}, limited by cable impedance.

I_{sc(c)}: short-circuit current across circuit-breaker terminals, less than I_{sc(b)}, limited by circuit breaker.

I_{sc(d)}: prospective short-circuit current, limited by cable impedance (case 1) or by impedance of cable + Canalis (case 2).

I_{sc(e)}: prospective short-circuit current, at head of Canalis by the circuit breaker (d) and the impedance of the Canalis supply cable.

Drawn from the Ecodial low-voltage installation-calculation software, produced by Schneider Electric for fast and precise evaluation of prospective short-circuit currents at different points in the circuit.

Please consult your regional sales office.

Canalis and protection coordination

Drawn from tests specified in standards (used in our guides and software), the table below determines the type of circuit breaker or fuse required for a particular type of busbar trunking depending on the prospective short-circuit current at the head of the Canalis trunking.

Type of busbar trunking	Circuit-breaker protection I _{sc(d)} (Prospective I _{sc})					Fuse protection Prospective I _{sc}
	10 kA	15 kA	20 kA	25 kA	50 kA	
20 A KDP	iC60N20	iC60H20	iC60L20	iC60L20	-	20 A gG
25 A KBA, 25 A KBB	iC60N25	iC60H25	iC60L25	iC60L25	NC100LH25	20 A gG
40 A KBA, 40 A KBB	iC60N40	iC60H40	iC60L40	iC60L40	NC100LH40	32 A gG

Characteristics of Canalis busbar trunking


Type of busbar trunking	Short-circuit withstand Rated peak short-circuit current (kA)	Permissible thermal stress for 0.1 s ≤ t ≤ 3 s (A ² S)
20 A KDP	3.6	12 x 10 ⁴
25 A KBA	4.4	19.5 x 10 ⁴
40 A KBA	9.6	90 x 10 ⁴
25 A KBB	4.4	19.5 x 10 ⁴
40 A KBB	9.6	90 x 10 ⁴

Simplified design guide for lighting distribution

Check on voltage drop

Recommended design procedure

- Assign each circuit with a voltage-drop value expressed as a % of the rated voltage (U_n), given that the voltage drop between the head of the circuit and any point must not exceed the values in the table below.

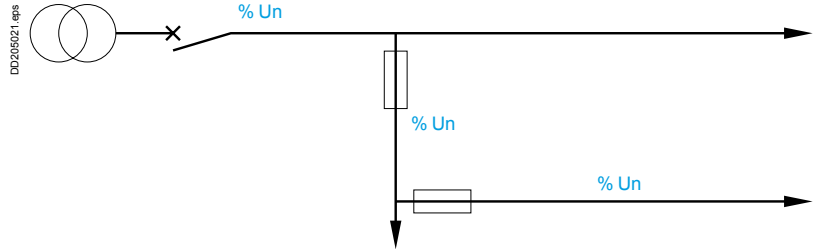

Type of installation	Voltage drop (for lighting)
Installations supplied directly from a public low-voltage distribution network	3 %
Installations supplied by a subscriber substation or a transformer substation from a high-voltage installation ⁽¹⁾	6 %

(1) Wherever possible, voltage drops in final lighting circuits must not exceed 3 %. When the main busbar trunking in the installation is longer than 100 metres, the permissible values may be increased 0.005 % per metre of trunking over 100 metres, on the condition that the total addition not exceed 0.5 %.

- Convert into volts the % of the rated voltage (U_n) assigned to each circuit.
- Using the tables, check that the trunking and/or cables selected in the previous pages are compatible with the calculated voltage drops. Otherwise, it is necessary to increase the size of the cables.

Remarks

- In a mixed circuit, the most economical option is to increase the size of cables and avoid the use of prefabricated trunking with a higher rated current (I_{nc}).
- For certain loads, it may be necessary to take into account transient voltage drops.

Voltage drop in the Canalis busbar trunking

The table below indicates the three-phase voltage drop, in volts, in the Canalis busbar trunking (electrical power uniformly distributed). The single-phase voltage drop is obtained by dividing the three-phase voltage drop indicated below by 0.866. If the exact operational current (I_b) and length are not available, select the next highest.

Type of Canalis	Operational current (A)	Length of line (m)															
		6	8	10	12	15	20	25	30	35	40	45	50	60	70	80	100
20 A KDP cos 0.8	10	0.3	0.5	0.6	0.7	0.9	1.2	1.5	1.7	2	2.3	2.6	2.9	3.5	4.1	4.6	5.8
	16	0.6	0.7	0.9	1.1	1.4	1.9	2.3	2.8	3.2	3.7	4.2	4.6	5.6	6.5	7.4	9.3
	20	0.7	0.9	1.2	1.4	1.7	2.3	2.9	3.5	4.1	4.6	5.2	5.8	7	8.1	9.3	11.6
20 A KDP cos 0.9	10	0.4	0.5	0.7	0.8	1	1.3	1.6	2	2.3	2.6	2.9	3.3	3.9	4.6	5.2	6.5
	16	0.6	0.8	1	1.2	1.6	2.1	2.6	3.1	3.6	4.2	4.7	5.2	6.2	7.3	8.3	10.4
	20	0.8	1	1.3	1.6	2	2.6	3.3	3.9	4.6	5.2	5.9	6.5	7.8	9.1	10.4	13
20 A KDP cos 1	10	0.4	0.6	0.7	0.9	1.1	1.4	1.8	2.2	2.5	2.9	3.2	3.6	4.3	5	5.8	7.2
	16	0.7	0.9	1.2	1.4	1.7	2.3	2.9	3.5	4	4.6	5.2	5.8	6.9	8.1	9.2	11.5
	20	0.9	1.2	1.4	1.7	2.2	2.9	3.6	4.3	5	5.8	6.5	7.2	8.6	10.1	11.5	14.4
25 A KBA	10	0.4	0.5	0.6	0.7	0.9	1.2	1.5	1.8	2.1	2.4	2.8	3.1	3.7	4.3	4.9	6.1
25 A KBB cos 0.8	16	0.6	0.8	1	1.2	1.5	2	2.4	2.9	3.4	3.9	4.4	4.9	5.9	6.8	7.8	9.8
	20	0.7	1	1.3	1.5	1.8	2.4	3.1	3.7	4.3	4.9	5.5	6.1	7.3	8.6	9.8	12.2
	25	0.9	1.2	1.5	1.8	2.3	3.1	3.8	4.6	5.3	6.1	6.9	7.6	9.2	10.7	12.2	15.3
25 A KBA	10	0.4	0.5	0.7	0.8	1	1.3	1.7	2	2.3	2.7	3	3.4	4	4.7	5.4	6.7
25 A KBB cos 0.9	16	0.6	0.9	1.1	1.3	1.6	2.1	2.7	3.2	3.8	4.3	4.8	5.4	6.4	7.5	8.6	10.7
	20	0.8	1.1	1.3	1.6	2	2.7	3.4	4	4.7	5.4	6	6.7	8	9.4	10.7	13.4
	25	1	1.3	1.7	2	2.5	3.4	4.2	5	5.9	6.7	7.5	8.4	10.1	11.7	13.4	16.8
25 A KBA	10	0.4	0.6	0.7	0.9	1.1	1.4	1.8	2.2	2.5	2.9	3.2	3.6	4.3	5	5.8	7.2
25 A KBB cos 1	16	0.7	0.9	1.2	1.4	1.7	2.3	2.9	3.5	4	4.6	5.2	5.8	6.9	8.1	9.2	11.5
	20	0.9	1.2	1.4	1.7	2.2	2.9	3.6	4.3	5	5.8	6.5	7.2	8.6	10.1	11.5	14.4
	25	1.1	1.4	1.8	2.2	2.7	3.6	5.4	6.3	7.2	8.1	9	10.1	11.7	12.6	14.4	18
40 A KBA	16	0.2	0.3	0.4	0.5	0.6	0.8	1	1.2	1.4	1.6	1.8	2	2.4	2.8	3.2	4
40 A KBB cos 0.8	20	0.3	0.4	0.5	0.6	0.7	1	1.2	1.5	1.7	2	2.2	2.5	3	3.5	4	5
	25	0.4	0.5	0.6	0.7	0.9	1.2	1.6	1.9	2.2	2.5	2.8	3.1	3.7	4.4	5	6.2
	32	0.5	0.6	0.8	1	1.2	1.6	2	2.4	2.8	3.2	3.6	4	4.8	5.6	6.4	8
40 A KBA	16	0.3	0.4	0.4	0.5	0.7	0.9	1.1	1.3	1.6	1.8	2	2.2	2.7	3.1	3.6	4.5
40 A KBB cos 0.9	20	0.3	0.4	0.6	0.7	0.8	1.1	1.4	1.7	2	2.2	2.5	2.8	3.4	3.9	4.5	5.6
	25	0.4	0.6	0.7	0.8	1.1	1.4	1.8	2.1	2.5	2.8	3.2	3.5	4.2	4.9	5.6	7
	32	0.5	0.7	0.9	1.1	1.3	1.8	2.2	2.7	3.1	3.6	4	4.5	5.4	6.3	7.2	9
40 A KBA	16	0.3	0.4	0.5	0.6	0.7	1	1.2	1.4	1.7	1.9	2.2	2.4	2.9	3.4	3.8	4.8
40 A KBB cos 1	20	0.4	0.5	0.6	0.7	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3	3.6	4.2	4.8	6
	25	0.5	0.6	0.8	0.9	1.1	1.5	1.9	2.3	2.6	3	3.4	3.8	4.5	5.3	6	7.5
	32	0.6	0.8	1	1.2	1.4	1.9	2.4	2.9	3.4	3.8	4.3	4.8	5.8	6.7	7.7	9.6
40 A KBA	16	0.3	0.4	0.5	0.6	0.7	1	1.2	1.4	1.7	1.9	2.2	2.4	2.9	3.4	3.8	4.8
40 A KBB	20	0.4	0.5	0.6	0.7	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3	3.6	4.2	4.8	6
40 A KBB	25	0.5	0.6	0.8	0.9	1.1	1.5	1.9	2.3	2.6	3	3.4	3.8	4.5	5.3	6	7.5
40 A KBB	32	0.6	0.8	1	1.2	1.4	1.9	2.4	2.9	3.4	3.8	4.3	4.8	5.8	6.7	7.7	9.6
40 A KBB	40	0.7	1	1.2	1.4	1.8	2.4	3	3.6	4.2	4.8	5.4	6	7.2	8.4	9.6	12

Voltage-drop conversion

Operational voltage (V)	Voltage drop in volts for a given %															
	0.3	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5	6	7	8	9	10
230	0.7	1.2	2.3	3.5	4.6	5.8	6.9	8.1	9.2	10	12	14	16	18	21	23
400	1.2	2	4	6	8	10	12	14	16	18	20	24	28	32	36	40

Simplified design guide for power distribution

Power distribution via Canalis

Except for the most extreme environments, there is no reason to hesitate. Canalis can be installed everywhere.

The procedure presented below describes the steps in creating a simple installation. For a detailed design study, it is necessary to use the suitable tools, approved by certification organisations and in compliance with local installation standards. **Ecodial** software, published by Schneider Electric, is perfectly suited to the task.

Procedure

- 1 Identify external influences.
- 2 Layout the Canalis structure in the building according to the load locations.
- 3 Carry out a power sum.
- 4 Size the busbar trunking.


1 - Identify external influences

The ambient temperature, the presence of dust or condensation, etc. are all factors in defining the degree of protection for the room containing the electrical installation. Canalis prefabricated busbar trunking provides an IP55 degree of protection and can be installed on virtually all sites.

■ Examples:

- mechanical workshops: IP32
- warehouses: IP30
- poultry farms: IP35
- greenhouses: IP23
- ...

2 - Layout of Canalis busbar trunking

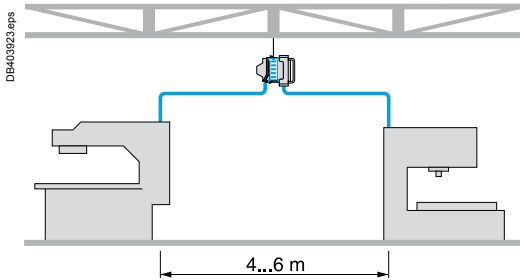

Layout of the distribution lines depends on load and source locations as well as trunking fixing possibilities.

- A single distribution line can supply a zone four to six metres long.
- Load protection is located in the tap-off units, as close as possible to the loads.
- A single Canalis feeder can supply a set of loads with different power ratings.

3 - Power sum

Once the busbar trunking has been laid out, calculate the currents drawn by the Canalis lines.

Calculation of the total operational current drawn by the line

(I_n) is equal to the sum of the currents drawn by the loads (I_b): $I_n = \sum I_b$.

The loads do not all operate at the same time or continuously at full rated load, i.e. it is necessary to calculate the diversity coefficient (K_s): $I_n = \sum (I_b \times K_s)$.

Diversity coefficient as a function of the number of loads


Application	Number of loads	K_s coefficient
Lighting, heating	-	1
Distribution (Mechanical workshop)	2...3	0.9
	4...5	0.8
	6...9	0.7
	10...40	0.6
	40 or more	0.5

Caution. For industrial installations, remember to allow for changes in types and numbers of machines. Similar to a switchboard, a margin of 20 % is recommended:

$$I_n = \sum I_b \times K_s \times 1.2$$

Selection of busbar trunking rating as a function of the operational current total I_n

Operational current total I_n (A)	Busbar trunking
0...40	KNA40
40...63	KNA63
63...100	KNA100 or KSA100
100...160	KNA160 or KSA160
160...250	KSA250
250...400	KSA400
400...500	KSA500
500...630	KSA630
630...800	KSA800
800...1000	KSA1000

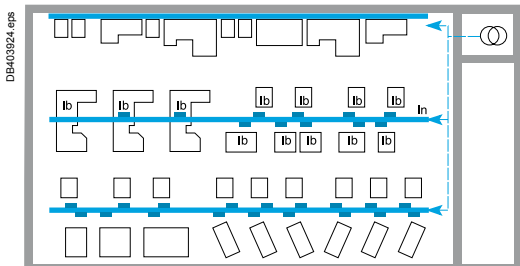

4 - Sizing the busbar trunking

Overload criterion

Ambient temperature

Canalis busbar trunking is sized for an ambient temperature of 35 °C. For higher temperatures, the trunking must be derated as per the data in the tables on the technical characteristics.

Example: Canalis 400 A KSA at 45 °C: $I_n = 400 \times 0.94 = 376 \text{ A}$.

Installation method

Canalis KN and KS trunking is designed to be installed edgewise.

In certain cases, it can also be installed flat (false floors) or vertically (KS rising mains).

These installation methods do not require derating for the KN and KS trunking.

Protection against trunking overloads

To enable future extensions, protection for prefabricated busbar trunking is generally sized for the rated current I_{nc} (or the permissible current I_z if coefficient K_1 is applied as a function of the ambient temperature).

■ Protection using gG (gl) fuses:

□ determine the standardised rated current I_n of the fuse such that $I_n \leq I_{nc}/1.1$ ($K_1=1.1$ for the fuses),

□ select the standardised rating I_n equal to that value or just below.

Check that $I_n \geq \sum (I_b \times K_s)$. If that is not the case, select the busbar trunking with the next highest rating.

Nota: protection using gl fuses results in a reduction of the permissible current in the trunking.

■ Circuit-breaker protection: select the setting current I_r for the circuit breaker such that $\sum (I_b \times K_s) \leq I_r \leq I_{nc}$.

Nota: circuit-breaker protection means Canalis busbar trunking can be used to the full rated load.

Voltage-drop criterion

The voltage drop between the head and any other point in the installation must not exceed the values in the table below:

Installation supplied by a distribution network	Lighting	Other application
LV public system	3 %	5 %
High voltage	6 %	8 %

For Canalis, voltage drops are indicated in V/100 mA in the “Characteristics” section.

$$U = \sum (I_b \times K_s) \times L / 100$$

Example: “Characteristics” page for KN, 40 to 160 A

For a cos φ of	Canalis KN	Canalis KN			
		40 A	63 A	100 A	160 A
0.7	V/100 mA	0.376	0.160	0.077	0.063
0.8	V/100 mA	0.425	0.179	0.084	0.067
0.9	V/100 mA	0.474	0.196	0.089	0.071
1	V/100 mA	0.516	0.208	0.088	0.068

Short-circuit current criterion

For typical applications with power ratings up to 630 kVA, a Schneider Electric solution including the low-voltage electrical switchboard, circuit breakers and Canalis busbar trunking ensures an installation sized to handle all short-circuit levels encountered.

To check the configuration of your installation (I_{sc} up to 150 kA), refer to the coordination tables on page 262 to page 264.

We also invite you to discover Ecodial, our complete design software for low-voltage installations (selection of circuit breakers and cables, calculation of breaking capacities, short-circuit currents and voltage drops, etc.), available from your Schneider Electric representative.

Simplified design guide

Determining the degree of protection

Standard IEC 60364-5-51 categorises a large number of external influences to which electrical installations can be subjected, for instance the presence of water, solid objects, shocks, vibrations and corrosive substances.

The importance of these influences depends on the installation conditions.

For example, the presence of water can vary from a few drops to total immersion.

Degree of protection IP

Standard IEC 60529 (February 2001) indicates the degree of protection provided by electrical equipment enclosures against accidental direct contact with live parts and against the ingress of solid foreign objects or water.

This standard does not apply to protection against the risk of explosion or conditions such as humidity, corrosive gases, fungi or vermin.

The IP code comprises 2 characteristic numerals and may include an additional letter when the actual protection of persons against direct contact with live parts is better than that indicated by the first numeral.

The first numeral characterises the protection of the equipment against penetration of solid objects and the protection of people.

The second numeral characterises the protection of the equipment against penetration of water with harmful effects.

Remarks concerning the degree of protection IP

- The degree of protection IP must always be read and understood numeral by numeral and not as a whole.

For example, an IP31 enclosure is suitable for an environment that requires a minimum degree of protection IP21. However an IP30 wall-mount enclosure is not suitable.

- The degrees of protection indicated in this catalogue are valid for the enclosures as presented. However, the indicated degree of protection is guaranteed only when the installation and device mounting are carried out in accordance with professional standard practice.

Additional letter

Protection of persons against direct contact with live parts.

The additional letter is used only if the actual protection of persons is higher than that indicated by the first characteristic numeral of the IP code.

If only the protection of persons is of interest, the two characteristic numerals are replaced by the letter "X", e.g. IPXXB.

Degree of protection IK

Standard IEC 62262 defines a coding system (IK code) indicating the degree of protection provided by electrical equipment enclosures against external mechanical impact.

Installation standard IEC 60364 provides a cross-reference between the various degrees of protection and the environmental conditions classification, relating to the selection of equipment according to external factors.







IK code●●

The IK code comprises 2 characteristic numerals (e.g. IK05).









Practical guide UTE C 15-103 shows, in the form of tables, the characteristics required for electrical equipment (including minimum degrees of protection), according to the locations in which they are installed.

Meaning of the numerals and letters representing the degree of protection IP.

1st characteristic numeral: corresponds to protection of equipment against penetration of solid objects and protection of persons against direct contact with live parts.

Protection of equipment	Protection of persons	
Non-protected	Non-protected	0
Protected against the penetration of solid objects having a diameter greater than or equal to 50 mm.	Protected against direct contact with the back of the hand (accidental contact).	1 <small>DD210014.eps</small> 
Protected against the penetration of solid objects having a diameter greater than or equal to 12.5 mm.	Protected against direct finger contact.	2 <small>DD210531.eps</small> 
Protected against the penetration of solid objects having a diameter greater than or equal to 2.5 mm.	Protected against direct contact with a 2.5 mm diameter tool.	3 <small>DD210532.eps</small> 
Protected against the penetration of solid objects having a diameter greater than 1 mm.	Protected against direct contact with a 1 mm diameter wire.	4 <small>DD210017.eps</small> 
Dust protected (no harmful deposits).	Protected against direct contact with a 1 mm diameter wire.	5 <small>DD210018.eps</small> 
Dust tight.	Protected against direct contact with a 1 mm diameter wire.	6 <small>DD210019.eps</small> 

2nd characteristic numeral: corresponds to protection of equipment against penetration of water with harmful effects.

Protection of equipment	
Non-protected	0
Protected against vertical dripping water (condensation).	1 <small>DD210006.eps</small> 
Protected against dripping water at an angle of up to 15°.	2 <small>DD210007.eps</small> 
Protected against rain at an angle of up to 60°.	3 <small>DD210008.eps</small> 
Protected against splashing water in all directions.	4 <small>DD210009.eps</small> 
Protected against water jets in all directions.	5 <small>DD210010.eps</small> 
Protected against powerful jets of water and waves.	6 <small>DD210011.eps</small> 
Protected against the effects of temporary immersion.	7 <small>DD210012.eps</small> 
Protected against the effects of prolonged immersion under specified conditions.	8 <small>DD210013.eps</small> 


Additional letter

Corresponds to protection of persons against direct contact with live parts.


A	With the back of the hand.
B	With the finger.
C	With a 2.5 mm diameter tool.
D	With a 1.0 mm diameter tool.

Degrees of protection IK against mechanical impact

The IK code comprises 2 characteristic numerals corresponding to a value of impact energy, in joules.

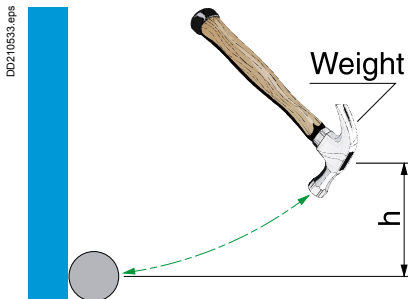

	Weight (kg)	Height (cm)	Energy (J)
00	Non-protected		
01	0.20	7.50	0.15
02		10	0.20
03		17.50	0.35
04		25	0.50
05		35	0.70
06	0.50	20	1
07		40	2
08	1.70	30	5
09	5	20	10
10		40	20

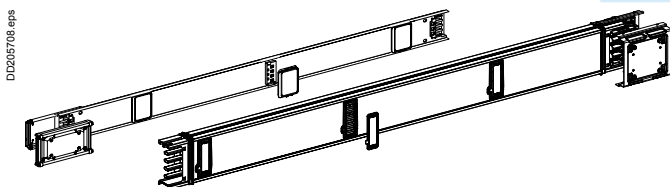

The Canalis KN and KS busbar trunking products are designed to provide IP55D and IK08 protection.

IP55
 Ue = 230...400 V

Run component characteristics

Rating of trunking (A)	KDP	20
-------------------------------	------------	-----------

General characteristics

Compliance with standards	IEC/EN 61439-6		
Degree of protection:	IP		55
Mechanical impacts	IK		07
Rated current at an ambient temperature of 35 °C	I _{nc}	A	20
Rated insulation voltage	U _i	V	690
Rated operational voltage	U _e	V	230...400
Rated impulse voltage	U _{imp}	kV	4
Rated frequency	f	Hz	50/60

Conductor characteristics

Phase conductors

Mean resistance at an ambient temperature of 20 °C	R ₂₀	mΩ/m	6.80
Mean resistance at I _{nc} and 35 °C	R ₁	mΩ/m	8.30
Mean reactance at I _{nc} , 35 °C and 50 Hz	X ₁	mΩ/m	0.02
Mean impedance at I _{nc} , 35 °C and 50 Hz	Z ₁	mΩ/m	8.30

Protective conductor (PE)

Mean resistance at an ambient temperature of 20 °C		mΩ/m	7.25
--	--	-------------	------

Fault loop characteristics

Symmetrical components method	Ph/N at 20 °C	Mean resistance	R _{0 ph/N}	mΩ/m	27.21	
		Mean reactance	X _{0 ph/N}	mΩ/m	0.85	
		Mean impedance	Z _{0 ph/N}	mΩ/m	27.22	
	Ph/PE at 20 °C	Mean resistance	R _{0 ph/PE}	mΩ/m	27.21	
		Mean reactance	X _{0 ph/PE}	mΩ/m	0.85	
		Mean impedance	Z _{0 ph/PE}	mΩ/m	27.22	
Impedance method	At 20 °C	Mean resistance	Ph/Ph	R _{b0 ph/ph}	mΩ/m	13.61
			Ph/N	R _{b0 ph/N}	mΩ/m	13.61
			Ph/PE	R _{b0 ph/PE}	mΩ/m	13.61
	For I _{nc} at 35 °C	Mean resistance	Ph/Ph	R _{b1 ph/ph}	mΩ/m	16.60
			Ph/N	R _{b1 ph/N}	mΩ/m	16.60
			Ph/PE	R _{b1 ph/PE}	mΩ/m	16.60
	For I _{nc} at 35 °C and 50 Hz	Mean reactance	Ph/Ph	X _{b ph/ph}	mΩ/m	0.04
			Ph/N	X _{b ph/N}	mΩ/m	0.04
			Ph/PE	X _{b ph/PE}	mΩ/m	0.04

Other characteristics

Short-circuit withstand capacity

Rated peak withstand current	I _{pk}	kA	3.6
Maximum thermal limit I ² t		A²s	120 x 10 ³
Rated short-time withstand current (t = 1 s)	I _{cw}	kA	0.34

Voltage drop

	Composite voltage drop (hot state) expressed in V/100 mA (50 Hz) with the load uniformly distributed over the run. If the load is concentrated at one end of the run, the voltage drop is twice the value indicated in the table.		
For a power factor of	1	V/100 mA	0.72
	0.9	V/100 mA	0.65
	0.8	V/100 mA	0.58
	0.7	V/100 mA	0.50

This table is given for three-phases network. The single phase voltage drop is obtained by dividing the three-phase voltage drop indicated above by 0.866. For lower neutral / neutral voltage phase, we divide the voltage drop above by 1.732.

Radiated magnetic field

Radiated magnetic field strength 1 metre from the trunking	B	μT	< 2 x 10 ⁻³
--	---	-----------	------------------------

Product selection when harmonics are present (for details, see the "Special Applications" section)

Operational current as a function of 3rd-order harmonic content	THD ≤ 15 %	20
	15 % < THD ≤ 33 %	16
	THD > 33 %	14

Permissible current as a function of ambient temperature

Ambient temperature	°C	< 35	35	40	45	50	55
Coefficient K1	%	n/a	1	0.93	0.85	0.76	0.66

Tap-off unit characteristics





See KBC tap-off unit characteristics on page 49.

Canalis KBA, 25 and 40 A

Busbar trunking for lighting and power socket distribution

IP55
 Ue = 230...400 V
 RAL 9003 white

Run component characteristics

Rating of trunking (A)	KBA	25	40
General characteristics			
Compliance with standards		IEC/EN 61439-6	IEC/EN 61439-6
Degree of protection:	IP	55	55
Mechanical impacts	IK	06	06
Polarity		L+N  or 3L+N 	L+N  or 3L+N 
Number of live conductors		2 or 4	2 or 4
Rated current at an ambient temperature of 35 °C	I _{nc}	A	25
Rated insulation voltage	U _i	V	690
Rated operational voltage	U _e	V	230...400
Rated impulse voltage	U _{imp}	kV	4
Rated frequency	f	Hz	50/60

Conductor characteristics

Phase conductors

Mean resistance at an ambient temperature of 20 °C	R ₂₀	mΩ/m	6.80	2.83
Mean resistance at I _{nc} and 35 °C	R ₁	mΩ/m	8.30	3.46
Mean reactance at I _{nc} , 35 °C and 50 Hz	X ₁	mΩ/m	0.02	0.02
Mean impedance at I _{nc} , 35 °C and 50 Hz	Z ₁	mΩ/m	8.33	3.46

Protective conductor (PE)

Mean resistance at an ambient temperature of 20 °C		mΩ/m	1.57	1.57
--	--	-------------	------	------

Fault loop characteristics

Symmetrical components method	Ph/N at 20 °C	Mean resistance	R _{0 ph/N}	mΩ/m	27.21	19.40	
		Mean reactance	X _{0 ph/N}	mΩ/m	0.85	0.38	
		Mean impedance	Z _{0 ph/N}	mΩ/m	27.22	19.41	
	Ph/PE at 20 °C	Mean resistance	R _{0 ph/PE}	mΩ/m	19.40	13.83	
		Mean reactance	X _{0 ph/PE}	mΩ/m	0.38	0.73	
		Mean impedance	Z _{0 ph/PE}	mΩ/m	19.41	13.85	
Impedance method	At 20 °C	Mean resistance	Ph/Ph	R _{b0 ph/ph}	mΩ/m	13.61	5.68
			Ph/N	R _{b0 ph/N}	mΩ/m	13.61	5.68
			Ph/PE	R _{b0 ph/PE}	mΩ/m	11.01	7.66
	For I _{nc} at 35 °C	Mean resistance	Ph/Ph	R _{b1 ph/ph}	mΩ/m	16.60	6.91
			Ph/N	R _{b1 ph/N}	mΩ/m	16.60	6.91
			Ph/PE	R _{b1 ph/PE}	mΩ/m	12.50	8.70
	For I _{nc} at 35 °C and 50 Hz	Mean reactance	Ph/Ph	X _{b ph/ph}	mΩ/m	0.04	0.90
			Ph/N	X _{b ph/N}	mΩ/m	0.04	0.90
			Ph/PE	X _{b ph/PE}	mΩ/m	0.035	0.035

Other characteristics

Short-circuit withstand capacity

Rated peak withstand current	I _{pk}	kA	4.40	9.60
Maximum thermal limit I ² t		A²s	195 x 10 ³	900 x 10 ³
Rated short-time withstand current (t = 1 s)	I _{cw}	kA	0.44	0.94

Voltage drop

Composite voltage drop (hot state) expressed in V/100 mA (50 Hz) with the load uniformly distributed over the run. If the load is concentrated at one end of the run, the voltage drop is twice the value indicated in the table.				
For a power factor of	1	V/100 mA	0.72	0.30
	0.9	V/100 mA	0.67	0.28
	0.8	V/100 mA	0.61	0.25
	0.7	V/100 mA	0.54	0.22
This table is given for three-phases network. The single phase voltage drop is obtained by dividing the three-phase voltage drop indicated above by 0.866. For lower neutral / neutral voltage phase, we divide the voltage drop above by 1.732.				

Radiated magnetic field

Radiated magnetic field strength 1 metre from the trunking	B	μT	< 2 x 10 ⁻³	< 2 x 10 ⁻³
--	---	-----------	------------------------	------------------------

Product selection when harmonics are present (for details, see the "Special Applications" section)

Operational current as a function of 3rd harmonic content	THD ≤ 15 %	25	40
	15 % < THD ≤ 33 %	20	32
	THD > 33 %	16	28

Permissible current as a function of ambient temperature

Ambient temperature	°C	< 35	35	40	45	50	55
Coefficient K1	%	n/a	1	0.96	0.93	0.89	0.85

Tap-off unit characteristics














See KBC tap-off unit characteristics on page 49.

IP55

U_e = 230...400 V

RAL 9003 white

Run component characteristics

Rating of trunking (A)		KBB	25	40				
General characteristics								
Compliance with standards			IEC/EN 61439-6	IEC/EN 61439-6				
Degree of protection:	IP		55	55				
Mechanical impacts	IK		06	06				
Polarity			L+N  3L+N  3L+N  L+N  3L+N  3(L+N)  or 3L+N  L+N  3L+N  or 3L+N  L+N  3(L+N) 					
		If polarity	L1 N1 L2 N 	Consult us.				
Number of circuits			1	2	2	1	2	2
Rated current at an ambient temperature of 35 °C	I _{nc}	A	25	23	23	40	38	38
Rated insulation voltage	U _i	V	690			690		
Rated operational voltage	U _e	V	230...400			230...400		
Rated impulse voltage	U _{imp}	kV	4			4		
Rated frequency	f	Hz	50/60			50/60		

Conductor characteristics

Phase conductors

Mean resistance at an ambient temperature of 20 °C	R ₂₀	mΩ/m	6.80		2.83
Mean resistance at I _{nc} and 35 °C	R ₁	mΩ/m	8.30		3.46
Mean reactance at I _{nc} , 35 °C and 50 Hz	X ₁	mΩ/m	0.02		0.02
Mean impedance at I _{nc} , 35 °C and 50 Hz	Z ₁	mΩ/m	8.33		3.46

Protective conductor (PE)

Mean resistance at an ambient temperature of 20 °C		mΩ/m	0.80		0.80
--	--	------	------	--	------

Fault loop characteristics

Symmetrical components method	Ph/N at 20 °C	Mean resistance	R _{0 ph/N}	mΩ/m	27.21	17.28	
		Mean reactance	X _{0 ph/N}	mΩ/m	0.85	5.25	
		Mean impedance	Z _{0 ph/N}	mΩ/m	27.22	18.06	
	Ph/PE at 20 °C	Mean resistance	R _{0 ph/PE}	mΩ/m	17.28	13.83	
		Mean reactance	X _{0 ph/PE}	mΩ/m	5.25	0.73	
		Mean impedance	Z _{0 ph/PE}	mΩ/m	18.06	13.85	
Impedance method	At 20 °C	Mean resistance	Ph/Ph	R _{b0 ph/ph}	mΩ/m	13.61	5.68
			Ph/N	R _{b0 ph/N}	mΩ/m	13.61	5.68
			Ph/PE	R _{b0 ph/PE}	mΩ/m	10.26	6.92
	For I _{nc} at 35 °C	Mean resistance	Ph/Ph	R _{b1 ph/ph}	mΩ/m	16.59	6.92
			Ph/N	R _{b1 ph/N}	mΩ/m	16.59	6.92
			Ph/PE	R _{b1 ph/PE}	mΩ/m	11.77	7.14
	For I _{nc} at 35 °C and 50 Hz	Mean reactance	Ph/Ph	X _{b ph/ph}	mΩ/m	0.35	0.90
			Ph/N	X _{b ph/N}	mΩ/m	0.35	0.90
			Ph/PE	X _{b ph/PE}	mΩ/m	0.07	1.85

Other characteristics

Short-circuit withstand capacity

Rated peak withstand current	I _{pk}	kA	4.40	9.60
Maximum thermal limit I ² t		A ² s	195 x 10 ³	900 x 10 ³
Rated short-time withstand current (t = 1 s)	I _{cw}	kA	0.44	0.94

Voltage drop

Composite voltage drop (hot state) expressed in V/100 mA (50 Hz) with the load uniformly distributed over the run. If the load is concentrated at one end of the run, the voltage drop is twice the value indicated in the table.				
For a power factor of	1	V/100 mA	0.72	0.30
	0.9	V/100 mA	0.67	0.28
	0.8	V/100 mA	0.61	0.25
	0.7	V/100 mA	0.55	0.22

This table is given for three-phases network. The single phase voltage drop is obtained by dividing the three-phase voltage drop indicated above by 0.866. For lower neutral / neutral voltage phase, we divide the voltage drop above by 1.732.

Radiated magnetic field

Radiated magnetic field strength 1 metre from the trunking	B	μT	< 2 x 10 ⁻³	< 2 x 10 ⁻³
--	---	----	------------------------	------------------------

Product selection when harmonics are present (for details, see the "Special Applications" section)

Operational current as a function of 3rd harmonic content	THD ≤ 15 %	25	40
	15 % < THD ≤ 33 %	20	32
	THD > 33 %	16	28

Permissible current as a function of ambient temperature

Ambient temperature	°C	< 35	35	40	45	50	55
Coefficient K1	%	n/a	1	0.96	0.93	0.89	0.85

Tap-off unit characteristics

See KBC tap-off unit characteristics on page 49.

KBC tap-off units, KDP connections

IP55

U_e = 230...400 V

Electrical characteristics of the remote-control circuit

Composition		Twisted pair, unshielded (10 twists/m)
Cross-section and type of conductor	mm ²	2 x 0.75 copper
Rated insulation voltage U _i (between power circuit and bus)	V	500
Rated operational voltage U _e (max. U between bus + and - poles)	V	50
Maximum operational current I _e	A	2
Linear resistance	mΩ/m	52
Linear capacitance	pF/m	30
DALI recommended length	m	150

Tap-off unit characteristics

Type of tap-off unit	KBC10	KBC10 Lighting control	KBC16CB	KBC16CF
----------------------	-------	------------------------------	---------	---------

General characteristics

Compliance with standards	IEC/EN 61439-6					
Degree of protection:	IP	55	55	55	55	
Rated current at an ambient temperature of 35 °C	I _{nc}	A	10	10	16	16
Rated insulation voltage	U _i	V	690	400	690	400
Rated operational voltage	U _e	V	230...400	230...400	230...400	230...400
Rated frequency	f	Hz	50/60	50/60	50/60	50/60

KDP connection characteristics

General characteristics

Compliance with standards	EN 60320 and NFC 60050; IEC 227-53 for H05WF cable					
Degree of protection:	IP	40	40	40	40	
Number of live conductors		2	2	2	2	
Rated current at an ambient temperature of 35 °C	I _{nc}	A	16	16	16	16
Rated insulation voltage	U _i	V	250	250	250	250
Rated operational voltage	U _e	V	250	250	250	250
Rated frequency	F	Hz	50	50	50	50

Conductor characteristics

Phase conductors

Mean resistance at an ambient temperature of 20 °C	R ₂₀	mΩ/m	12.4	12.4	12.4	12.4
Mean resistance at I _{nc} and 35 °C	R ₁	mΩ/m	14.5	14.5	14.5	14.5
Mean reactance at I _{nc} , 35 °C and 50 Hz	X ₁	mΩ/m	3.1	3.1	3.1	3.1

Protective conductor (PE)

Mean resistance at an ambient temperature of 20 °C		mΩ/m	12.4	12.4	12.4	12.4
--	--	------	------	------	------	------

IP55

U_e = 230...500 V

RAL 9001 White

Run component characteristics

Rating of trunking (A)		KN	40	63	100	160			
General characteristics									
Compliance with standards			IEC/EN 61439-6						
Degree of protection:		IP	55	55	55	55			
Mechanical impacts		IK	08	08	08	08			
Rated current at an ambient temperature of 35 °C		I _{nc}	A	40	63	100	160		
Rated insulation voltage		U _i	V	500	500	500	500		
Rated operational voltage		U _e	V	500	500	500	500		
Rated impulse voltage		U _{imp}	kV	6	6	6	6		
Rated frequency		f	Hz	50/60	50/60	50/60	50/60		
Conductor characteristics									
Phase conductors									
Mean resistance at an ambient temperature of 20 °C		R ₂₀	mΩ/m	1.7	1.7	1.7	0.61		
Mean resistance at I _{nc} and 35 °C		R ₁	mΩ/m	1.94	2.05	2.2	0.79		
Mean reactance at I _{nc} , 35 °C and 50 Hz		X ₁	mΩ/m	0.25	0.25	0.25	0.24		
Mean impedance at I _{nc} , 35 °C and 50 Hz		Z ₁	mΩ/m	1.96	2.06	2.23	0.83		
Protective conductor (PE)									
Mean resistance at an ambient temperature of 20 °C			mΩ/m	1.09	1.09	1.09	1.09		
Fault loop characteristics									
Symmetrical components method	Ph/N at 20 °C	Mean resistance	R _{0 ph/N}	mΩ/m	6.93	6.93	6.93	2.67	
		Mean reactance	X _{0 ph/N}	mΩ/m	1.56	1.56	1.56	1.4	
		Mean impedance	Z _{0 ph/N}	mΩ/m	7.11	7.11	7.11	3.01	
	Ph/PE at 20 °C	Mean resistance	R _{0 ph/PE}	mΩ/m	5.15	5.15	5.15	3.34	
		Mean reactance	X _{0 ph/PE}	mΩ/m	1.68	1.68	1.68	1.29	
		Mean impedance	Z _{0 ph/PE}	mΩ/m	5.42	5.42	5.42	3.58	
Impedance method	At 20 °C	Mean resistance	Ph/Ph	R _{b0 ph/ph}	mΩ/m	3.4	3.4	3.4	1.21
			Ph/N	R _{b0 ph/N}	mΩ/m	3.4	3.4	3.4	1.24
			Ph/PE	R _{b0 ph/PE}	mΩ/m	2.85	2.85	2.85	1.71
	For I _{nc} at 35 °C	Mean resistance	Ph/Ph	R _{b1 ph/ph}	mΩ/m	3.89	4.09	4.43	1.58
			Ph/N	R _{b1 ph/N}	mΩ/m	3.89	4.09	4.43	1.61
			Ph/PE	R _{b1 ph/PE}	mΩ/m	3.14	3.27	3.45	2.22
			Ph/Ph	X _{b ph/ph}	mΩ/m	0.52	0.52	0.52	0.79
	For I _{nc} at 35 °C and 50 Hz	Mean reactance	Ph/N	X _{b ph/N}	mΩ/m	0.78	0.78	0.78	0.75
			Ph/PE	X _{b ph/PE}	mΩ/m	0.96	0.96	0.96	0.84
	Other characteristics								
Short-circuit withstand capacity									
Rated peak withstand current		I _{pk}	kA	6	11	14	20		
Maximum thermal limit I ² t			A ² s	1.98 x 10 ⁶	1.98 x 10 ⁶	1.98 x 10 ⁶	8 x 10 ⁶		
Rated short-time withstand current (t = 1 s)		I _{cw}	kA	1.4	1.4	1.4	2.8		
Voltage drop									
Composite voltage drop (hot state) expressed in V/100 mA (50 Hz) with the load uniformly distributed over the run. If the load is concentrated at one end of the run, the voltage drop is twice the value indicated in the table.									
For a power factor of			V/100 mA	0.168	0.178	0.191	0.068		
		1							
		0.9	V/100 mA	0.161	0.169	0.181	0.071		
		0.8	V/100 mA	0.147	0.155	0.165	0.067		
		0.7	V/100 mA	0.133	0.140	0.149	0.063		
This table is given for three-phases network. The single phase voltage drop is obtained by dividing the three-phase voltage drop indicated above by 0.866.									
Radiated magnetic field									
Radiated magnetic field strength 1 metre from the trunking		B	μT	0.039	0.063	0.106	0.186		
Product selection when harmonics are present (for details, see the "Special Applications" section)									
Operational current as a function of 3rd harmonic content		THD ≤ 15 %		40	63	100	160		
		15 % < THD ≤ 33 %		32	50	80	130		
		THD > 33 %		28	40	63	100		
Permissible current as a function of ambient temperature									
Ambient temperature		°C	< 35	35	40	45	50	55	
Coefficient K1		%	Without	1	0.97	0.94	0.91	0.87	

Tap-off unit characteristics

General characteristics

Degree of protection:	IP		55
Mechanical impacts	IK		08
Rated insulation voltage	U _i	V	400, 500 depending on protective device
Rated operational voltage	U _e	V	400, 500 depending on protective device
Rated impulse voltage	U _{imp}	kV	4.6
Rated frequency	f	Hz	50/60

Electrical characteristics of remote control circuit (KNT)

Number of conductors			3 x 2.5
Material			Copper
Rated operational voltage	U _e	V	500
Rated insulation voltage	U _i	V	500
Rated impulse voltage	U _{imp}	kV	6
Rated current at an ambient temperature of 35 °C	I _{nc}	A	6
Mean resistance at an ambient temperature of 20 °C	R ₂₀	mΩ/m	7.6
Mean resistance at I _{nc} and 35 °C	R ₁	mΩ/m	8.7

IP55

U_e = 230...690 V

RAL 9001 White

Run component characteristics

Rating of trunking (A)	KS	100	160	250	400	500	630	800	1000
------------------------	----	-----	-----	-----	-----	-----	-----	-----	------

General characteristics

Compliance with standards		IEC/EN 61439-6								
Degree of protection:	IP	55	55	55	55	55	55	55	55	55
Mechanical impacts	IK	08	08	08	08	08	08	08	08	08
Rated current at an ambient temperature of 35 °C	I _{nc}	A	100	160	250	400	500	630	800	1000
Rated insulation voltage	U _i	V	690	690	690	690	690	690	690	690
Rated operational voltage	U _e	V	690	690	690	690	690	690	690	690
Rated impulse voltage	U _{imp}	kV	8	8	8	8	8	8	8	8
Rated frequency	f	Hz	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60

Conductor characteristics

Phase conductors

Mean resistance at an ambient temperature of 20 °C	R ₂₀	mΩ/m	1.19	0.55	0.28	0.15	0.11	0.09	0.06	0.04
Mean resistance at I _{nc} and 35 °C	R ₁	mΩ/m	1.59	0.77	0.39	0.21	0.15	0.13	0.09	0.06
Mean reactance at I _{nc} , 35 °C and 50 Hz	X ₁	mΩ/m	0.15	0.15	0.16	0.14	0.07	0.07	0.06	0.06
Mean impedance at I _{nc} , 35 °C and 50 Hz	Z ₁	mΩ/m	1.6	0.79	0.42	0.25	0.16	0.15	0.11	0.09

Protective conductor (PE)

Mean resistance at an ambient temperature of 20 °C		mΩ/m	0.42	0.42	0.35	0.19	0.07	0.07	0.07	0.06
--	--	------	------	------	------	------	------	------	------	------

Fault loop characteristics

Symmetrical components method	Ph/N at 20 °C	Mean resistance	R _{0 ph/N}	mΩ/m	4.85	1.1	1.28	0.74	0.5	0.45	0.32	0.23	
		Mean reactance	X _{0 ph/N}	mΩ/m	0.95	0.22	0.86	0.67	0.36	0.35	0.31	0.27	
		Mean impedance	Z _{0 ph/N}	mΩ/m	4.94	1.12	1.54	1	0.62	0.57	0.45	0.36	
	Ph/PE at 20 °C	Mean resistance	R _{0 ph/PE}	mΩ/m	2.75	2.01	1.34	0.88	0.4	0.51	0.35	0.32	
		Mean reactance	X _{0 ph/PE}	mΩ/m	1.11	0.93	0.7	0.67	0.48	0.55	0.43	0.4	
		Mean impedance	Z _{0 ph/PE}	mΩ/m	2.96	2.22	1.51	1.11	0.63	0.75	0.56	0.51	
Impedance method	At 20 °C	Mean resistance	Ph/Ph	R _{b0 ph/ph}	mΩ/m	2.4	1.15	0.65	0.41	0.25	0.23	0.18	0.15
			Ph/N	R _{b0 ph/N}	mΩ/m	2.44	1.21	0.74	0.51	0.3	0.28	0.23	0.2
			Ph/PE	R _{b0 ph/PE}	mΩ/m	1.87	1.3	0.78	0.55	0.31	0.3	0.28	0.26
	For I _{nc} at 35 °C	Mean resistance	Ph/Ph	R _{b1 ph/ph}	mΩ/m	3.19	1.55	0.78	0.57	0.35	0.32	0.25	0.21
			Ph/N	R _{b1 ph/N}	mΩ/m	3.21	1.57	0.82	0.7	0.41	0.39	0.32	0.28
			Ph/PE	R _{b1 ph/PE}	mΩ/m	2.38	1.46	0.91	0.76	0.43	0.41	0.39	0.37
	For I _{nc} at 35 °C and 50 Hz	Mean reactance	Ph/Ph	X _{b ph/ph}	mΩ/m	0.31	0.31	0.32	0.28	0.14	0.14	0.13	0.12
			Ph/N	X _{b ph/N}	mΩ/m	0.45	0.45	0.45	0.39	0.2	0.2	0.18	0.17
			Ph/PE	X _{b ph/PE}	mΩ/m	0.58	0.42	0.42	0.39	0.24	0.24	0.23	0.22

Other characteristics

Short-circuit withstand capacity

Rated peak withstand current	I _{pk}	kA	15.7	22	28	49.2	55	67.5	78.7	78.7
Maximum thermal limit I ² t (t = 1 s)		10 ⁶ A ² s	6.8	20.2	100	354	733	1225	1758	1758
Rated short-time withstand current (t = 1 s)	I _{cw}	kA	2.6	4.45	10	18.8	26.2	32.1	37.4	37.4

Voltage drop

Composite voltage drop (hot state) expressed in V/100 mA (50 Hz) with the load uniformly distributed over the run. If the load is concentrated at one end of the run, the voltage drop is twice the value indicated in the table.

For a power factor of	1	V/100 mA	0.138	0.067	0.034	0.018	0.013	0.011	0.008	0.005
	0.9	V/100 mA	0.130	0.066	0.036	0.022	0.014	0.013	0.009	0.007
	0.8	V/100 mA	0.118	0.061	0.035	0.022	0.014	0.013	0.009	0.007
	0.7	V/100 mA	0.106	0.056	0.034	0.021	0.013	0.012	0.009	0.008

This table is given for three-phases network. The single phase voltage drop is obtained by dividing the three-phase voltage drop indicated above by 0.866.

Radiated magnetic field

Radiated magnetic field strength 1 metre from the trunking	B	μT	0.19	0.31	0.52	0.89	0.50	0.66	0.88	1.21
--	---	----	------	------	------	------	------	------	------	------

Product selection when harmonics are present (for details, see the "Special Applications" section)

Operational current as a function of 3rd harmonic content	THD ≤ 15 %	100	160	250	400	500	630	800	1000
	15 % < THD ≤ 33 %	80	125	200	315	400	500	630	800
	THD > 33 %	63	100	160	250	315	400	500	630

Permissible current as a function of ambient temperature

Ambient temperature	°C	< 35	35	40	45	50	55
Coefficient K1	%	n/a	1	0.97	0.94	0.91	0.87

Tap-off unit characteristics


General characteristics

Degree of protection:	IP		55
Mechanical impacts	IK		08
Rated insulation voltage ⁽¹⁾	U _i	V	400 or 500 depending on protective device
Rated operational voltage ⁽¹⁾	U _e	V	400 or 500 depending on protective device
Rated impulse voltage	U _{imp}	kV	6.8
Rated frequency	f	Hz	50/60

⁽¹⁾ For 690 V, please see your sales office.

Schneider Electric offers comprehensive software to help you design Canalis installations and prepare quotations.

CanBrass, a comprehensive tool

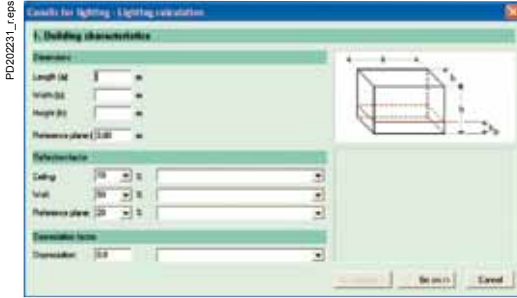

Lighting design guide.

Functions

CanBrass software, from Schneider Electric, has been developed to accompany you when designing and preparing quotations for Canalis busbar trunking installations.

CanBrass software helps you rapidly design the best installation for your project. It lets you:

- easily choose the right products
- compare the busbar trunking solution with an equivalent cable-based solution
- list the catalogue numbers and quantities required
- prepare a complete quotation including parts and labour.


The user enters the following information:

- for lighting circuits: current, length, number of luminaires and identical lines
- for power circuits: current, length, number of machines and the rating and type of protection for each line.




Data entry screen for a Canalis trunking line.

The software breaks the project down into quantities for the different product functions (fixings, straight lengths, etc.).

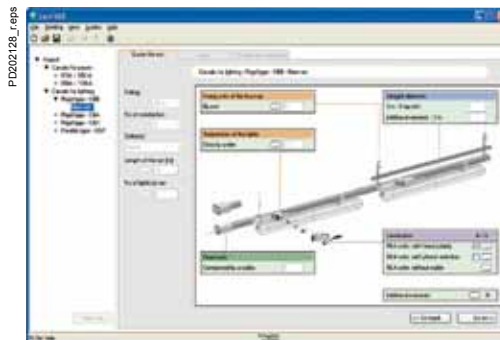

Breakdown of the line into product functions.

After confirming the breakdown of the line, the user accesses the costing table.

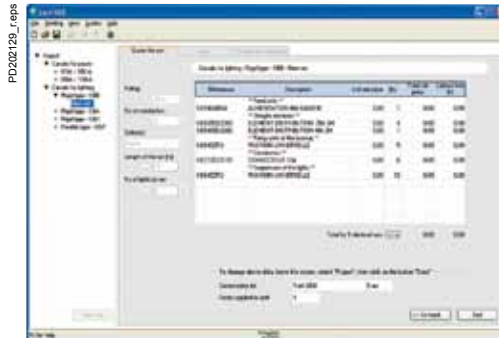


Breakdown of the line into catalogue numbers with price calculations and estimation of the time required for installation.

CanBrass software can be used to produce a complete quotation (quantities, catalogue numbers, unit price, total net price and manhours required for installation).



Comparison of a Canalis lighting installation and an equivalent cable-based solution.

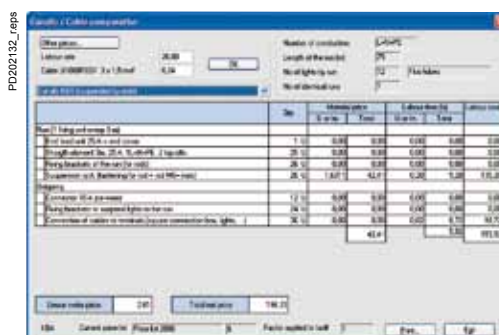

Detailed costs for both solutions.

<i>Index</i>	3
<i>Introduction</i>	9
<i>Design guides and characteristics</i>	29

Presentation

Canalis KDP	58
For lighting and power socket distribution	58

Description


Canalis KDP, 20 A	62
Busbar trunking for lighting and power socket distribution	62
Canalis KDP, KBA and KBB	64
Busbar trunking for lighting and power socket distribution	64
Tap-off units	64
Canalis KDP, 20 A	66
Busbar trunking for lighting and power socket distribution	66
Tap-off units	66
Radio frequency tap-off unit	67
Prefabricated connections	68

Catalogue numbers - Dimensions

Canalis KDP, 20 A	69
Busbar trunking for lighting and power socket distribution	69
Canalis KDP, KBA and KBB tap-off units	72
For lighting and power socket distribution	72

<i>Canalis KBA</i>	79
<i>Canalis KBB</i>	99
<i>Canalis KN</i>	121
<i>Canalis KS</i>	153
<i>Canalis KS riser</i>	205
<i>Canalis KT</i>	225
<i>Technical specifications</i>	231
<i>Maintenance</i>	239
<i>Recommendations for special applications</i>	243
<i>Catalogue numbers</i>	273
<i>Canalis worldwide</i>	279

PD202161.eps

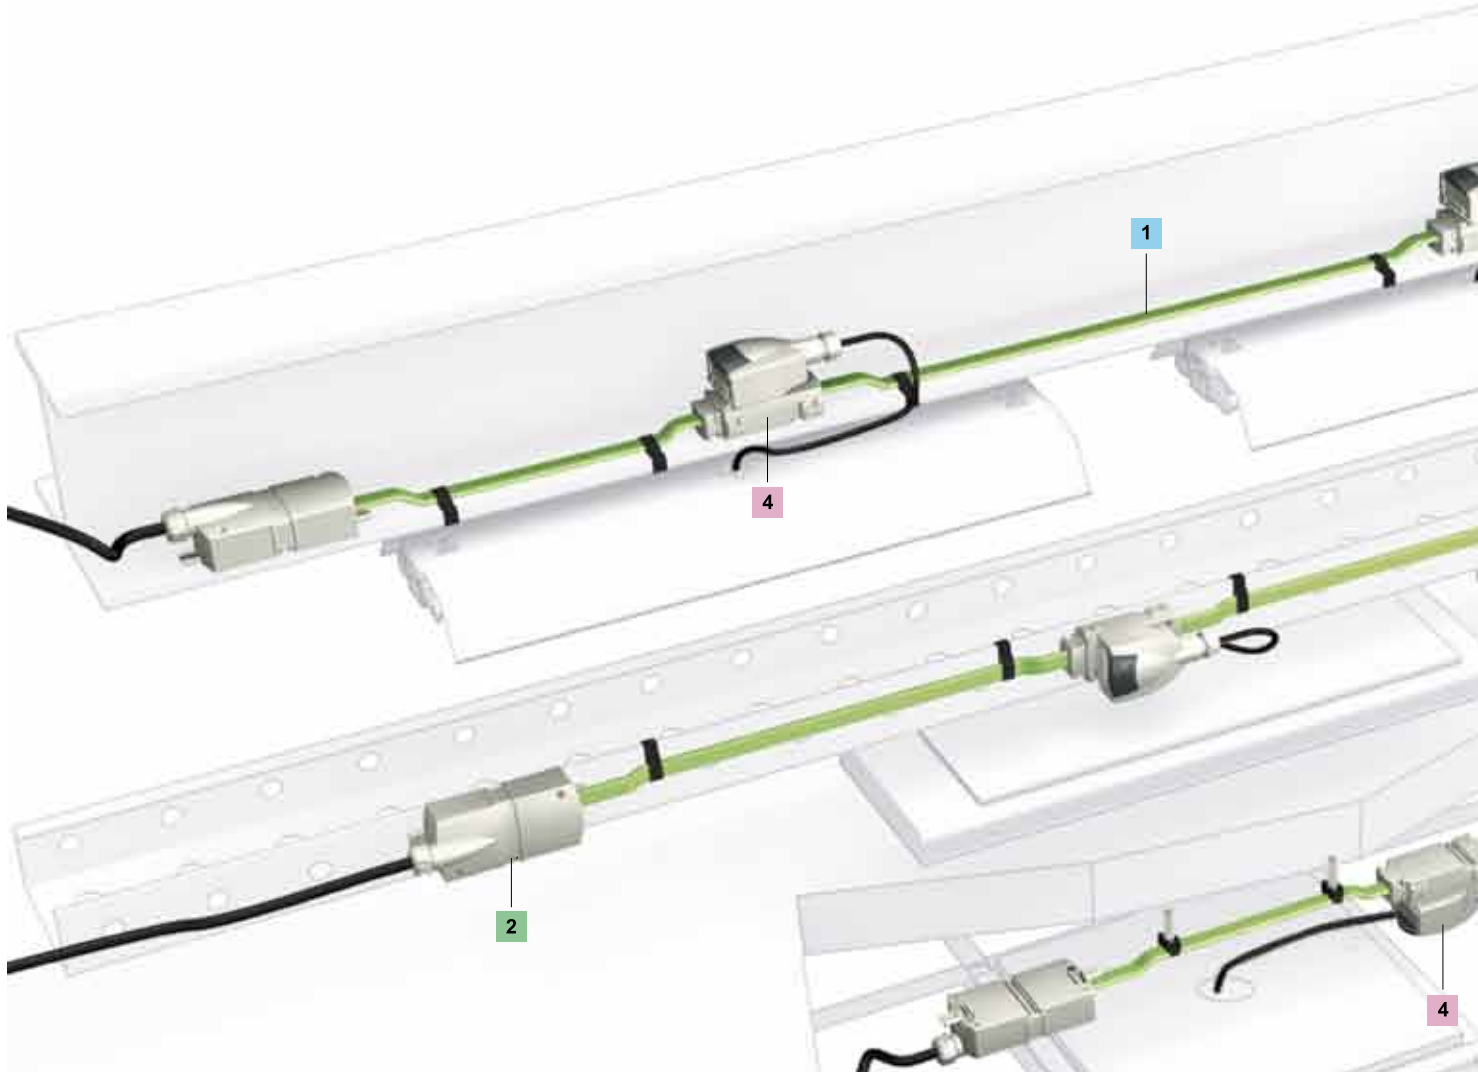

1. Run components

- Rating: 20 A.
- 2 or 4 live conductors.
- Available in 24 or 192-metre reels.




PD202156.eps

2. Feed units and end covers

- The feed units delivered with end covers receive the cables supplying one end of Canalis KDP trunking.



PD202157.eps

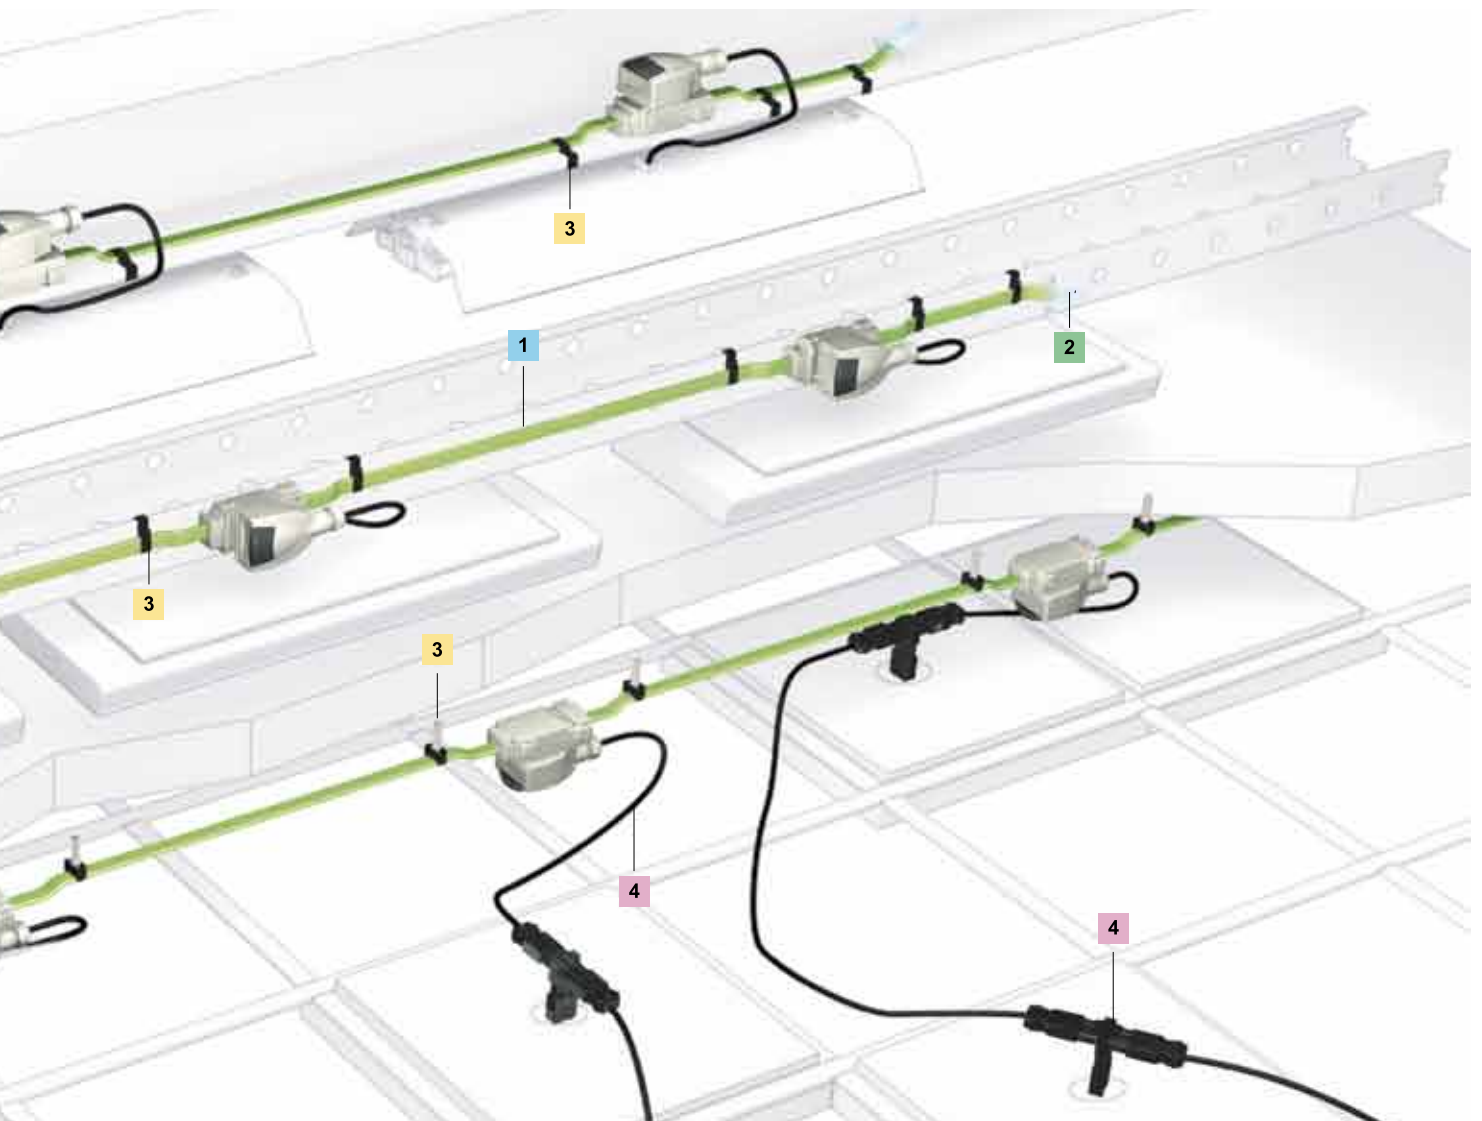

3. Fixing system

- The fixing system is used to attach Canalis KDP to the sides of cable trays, metal structures or concrete slabs.

PD202158.eps



4. Tap-off units

- The 10 and 16 A tap-off units (pre-wired or not) offer phase selection or fixed polarities, and can be used on the entire lighting range.

PD202159.eps



Prefabricated connections

- Prefabricated connections can supply several luminaires from the same tap-off unit, for distribution in false ceilings.

PD202160.eps





No toxic emission in case of fire

All components in the KDP range are **halogen free**.
In case of fire, Canalis KDP does not release smoke or toxic gases.

DD202141.eps




A special tap-off unit for lighting control


This tap-off unit, designed for partitioned sites, is designed for:

- single-circuit switching
- double-circuit switching
- two-way switching
- control by impulse switch or timer.

DD202177.eps

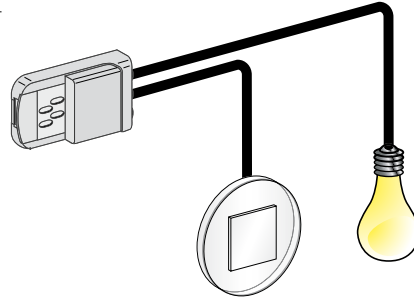


PD202102M.eps

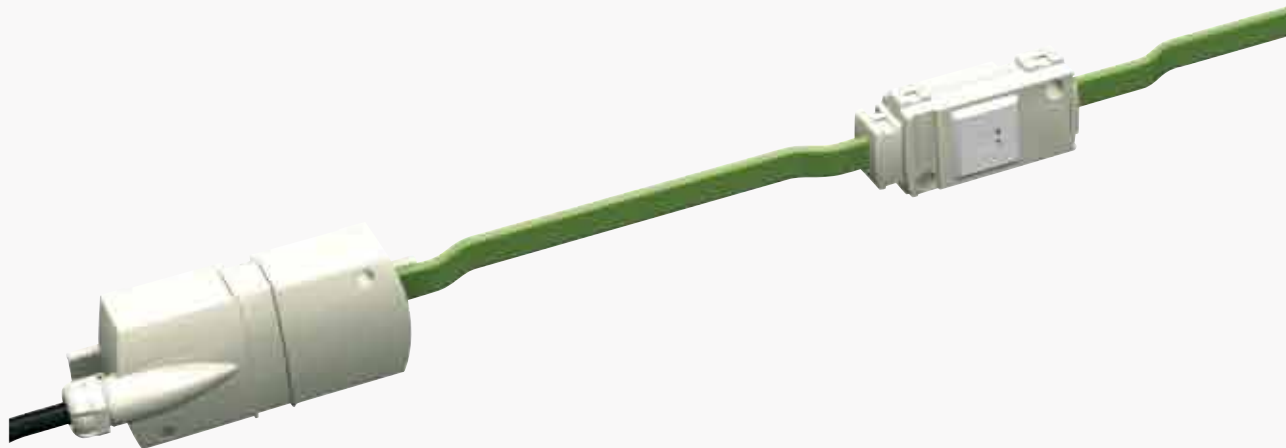

Remarkably compact

The compact design of Canalis KDP ensures easy mounting in false floors or ceilings.


DD202178.eps

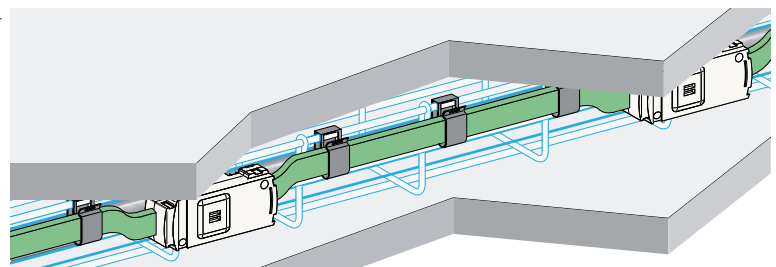





Three levels of illuminance

By using three-phase trunking, it is possible to create up to three levels of illuminance.

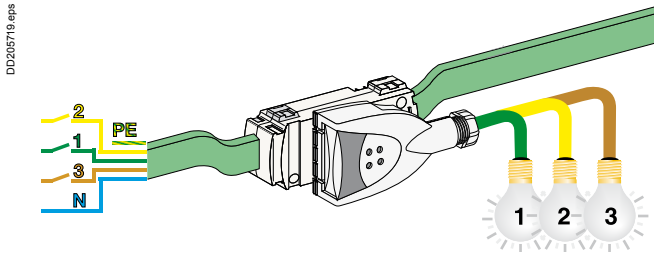

The right fixings

With fixings designed to suit the building structure, Canalis KDP is easy to install.

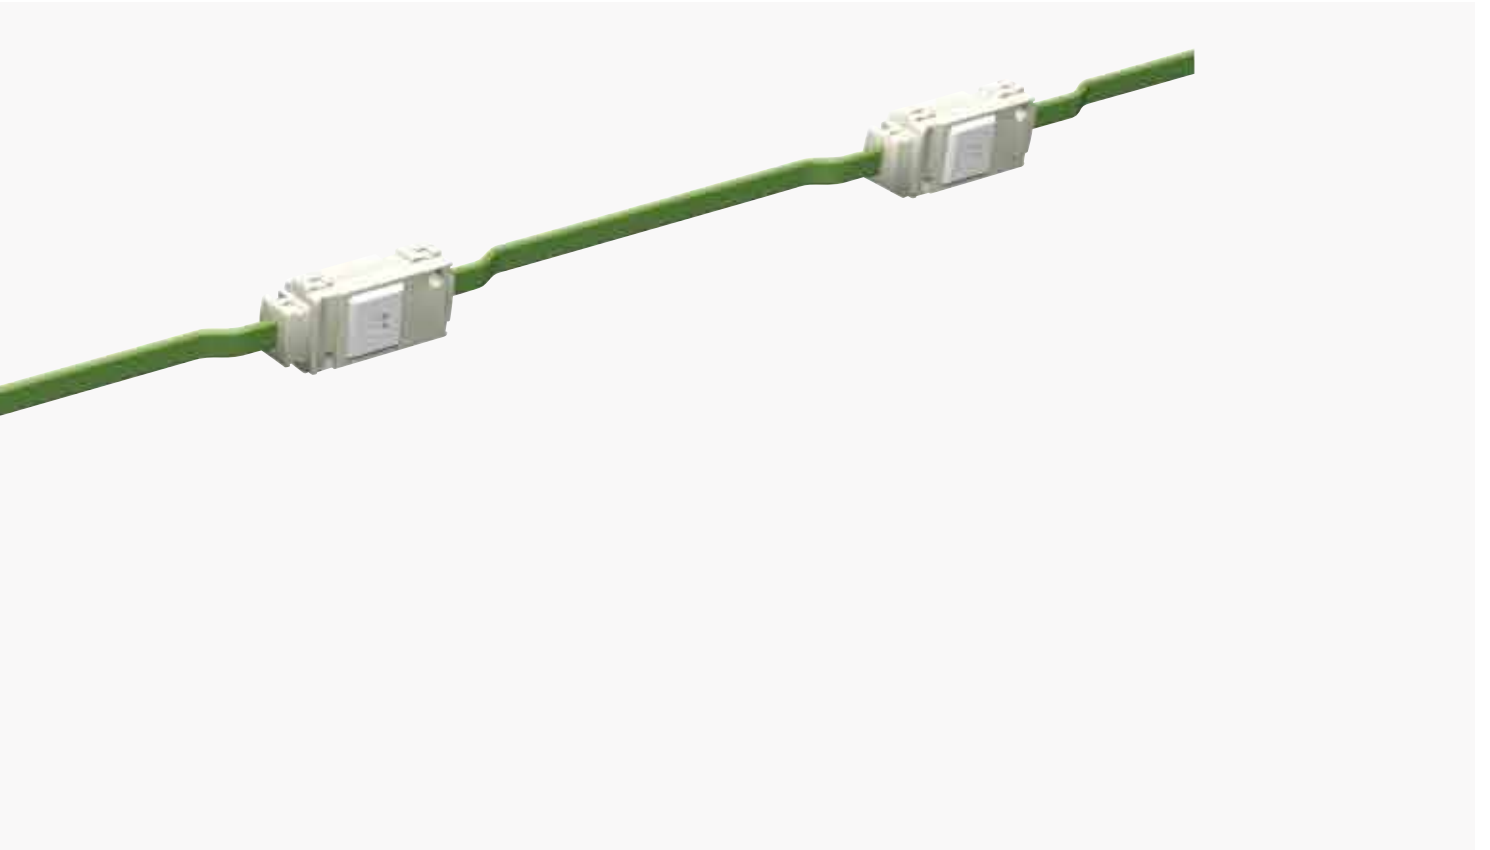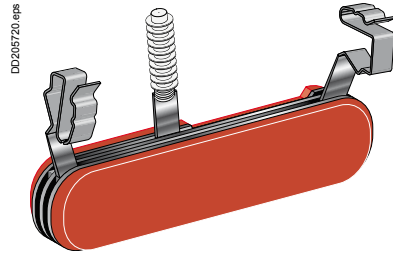

A high degree of protection

- **IP55** guarantees trunking protection against splashes and dust.
- Canalis KS complies with **sprinkler tests**, guaranteeing operation under vertically and horizontally sprayed water for 50 minutes.

The high degree of protection for Canalis KS means it can be installed in all types of buildings.



Description


IP55

U_e = 230...400 V


Canalis KDP, 20 A

Busbar trunking for lighting and power socket distribution


DD205727.eps

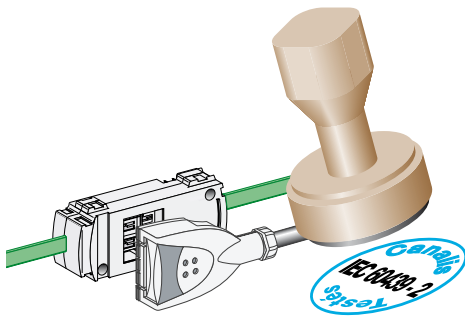


DD210155.eps

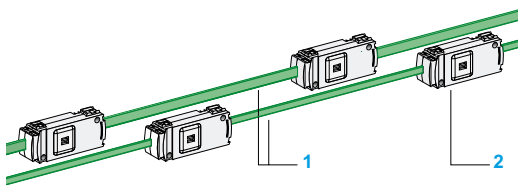

DB403927.eps



DB403928.eps

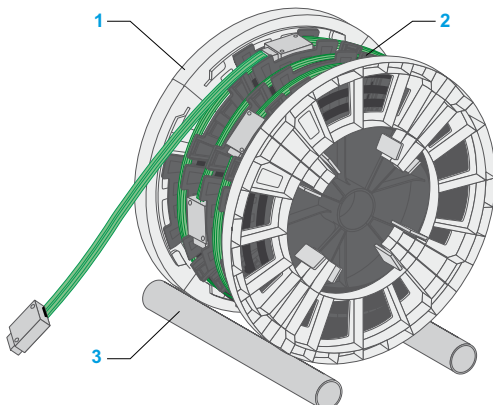

Canalis KDP is halogen free

In the event of a fire, cable and conductor insulation containing halogens (chlorine, bromine, etc.) releases dark, toxic and corrosive smoke. The latter can cause panic, difficulties for rescue teams, intoxication and severe damage to electronic and computer equipment.

KDP trunking, halogen free, avoids the above risks.

Run components

Carry the current and supply lighting fixtures.

The run components consist of:

- 1 A flat ribbon cable** conforming to standard IEC 60502-1 with 3 or 5 x 2.5 mm² conductors, including one protective conductor. The copper conductors are tin-plated to protect against corrosion. Canalis KDP is available in 24-metre, 183-metre (special for 1350 mm tap-off unit spacing) or 192-metre reels. The 192-metre reel contains eight spools, clipped together, each containing 24 metres of cable. For easy installation and use of the uncoiler kit (see above), it is recommended that KDP be ordered in multiples of 24 metres.
- 2 Tap-off outlets**, factory fitted. These can receive all tap-off units in the KBA and KBB ranges and ensure electrical connection of the tap-off units. The degree of protection of the assembly is IP55. Available distances between tap-off outlets: 1.2 m, 1.35 m, 1.5 m, 2.4 m, 2.7 m and 3 m.

All the insulating and plastic materials have increased fire-retardant capacity:

- incandescent-wire test in compliance with IEC 60695-2:
- 960 °C for components in contact with live parts,
- 650 °C for other components.

KDP is certified to be non-flame-propagating in compliance with standard IEC 60332-3.

The system as a whole complies with standard IEC 61439-6.

Feed units and end covers

After stripping the KDP cable, the connection is made by means of a screw terminal for copper cable with a maximum c.s.a. of 4 mm².

These components are fitted with a PG 16 cable gland. They are locked in the closed position by a screw.

They can be used to supply the run from either side and for connecting two KDP runs. Each feed unit is supplied with an end cover for the opposite end of the run.

The system as a whole complies with standard IEC 61439-6.

Uncoiler kit

Makes for easy installation of KDP trunking by allowing the cable to be rolled out from the reel.

It can be used with all standard roller-type uncoilers.

It clips onto the packing spools and can be removed for re-use.

- 1** Uncoiler kit (8 parts)
- 2** Packing spools.
- 3** Cable uncoiler (not supplied).



Fixing systems

These systems are used to fix KDP in accordance with recommended installation methods.

Fixing to the edge of pre-slotted sheet-metal cable trays

1 Fixing to edge of sheet metal: KDPZF10.


For the ribbon cable and the feed unit.

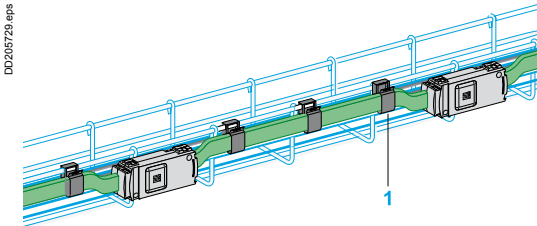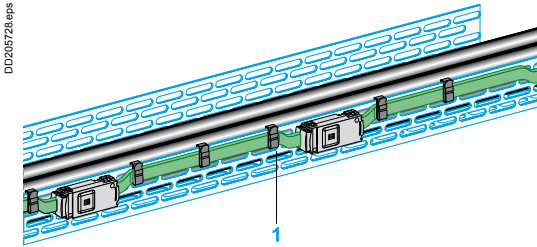

Fixing to the edge of mesh trays

1 Fixing for mesh trays: KDPZF14.

For fixing the ribbon cable and feed unit to wire diameters between 5 and 8 mm.

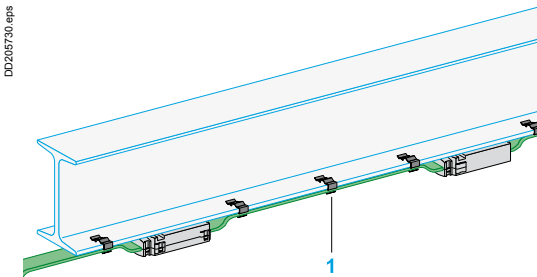


Fixing to metal structures

1 Fixings for I-beams of the following thicknesses:

- KDPZF10: 1 to 8 mm,
- KDPZF11: 8 to 13 mm,
- KDPZF12: 13 to 17 mm,
- KDPZF13: 17 to 22 mm.

For $h \geq 120$ mm, the KDP may be fixed on top of the I-beam wing.

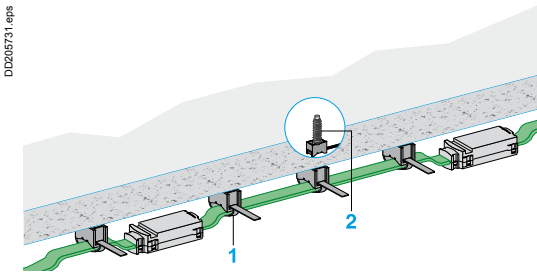


Fixing to concrete slabs or wooden structures

1 Fixing with cable tie for concrete or wood.

KDPZF20: for the ribbon cable.

2 Concrete fixing plug.

KDPZF21: for 8 mm diameter hole.



Stripping tool

Used to cut, remove the sheath and strip KDP 3 or 5-conductor cables.

Description

IP55

U_e = 230...400 V


Canalis KDP, KBA and KBB

Busbar trunking for lighting and

power socket distribution

Tap-off units

DD205732.eps

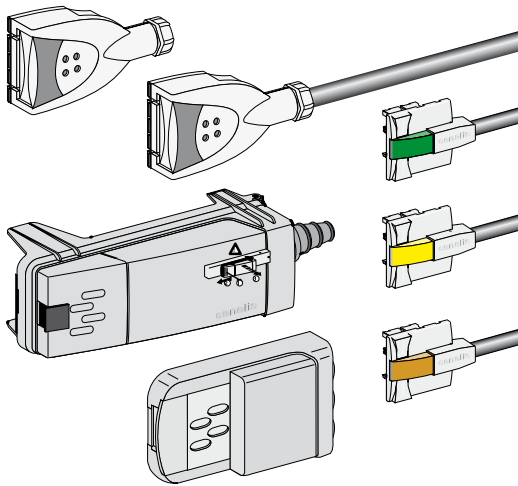


Tap-off units (general)

For instantaneous connection of luminaires to busbar trunking:

- they can be handled while energised and under live conditions
- the contacts for live conductors are of the clamp type
- PE connection occurs before that of the phases and neutral
- phase-selection system (clip-in contact studs) for balancing of 3-phase distribution systems
- selection is visible via a transparent window
- a coloured lock holds them in the tap-off outlet
- all the insulating and plastic materials have a high fire-retardant capacity:
 - incandescent-wire test in compliance with IEC 60695-2:
 - 960 °C for components in contact with live parts,
 - 650 °C for other components.

All the insulators and plastic components are **halogen free**.

DB403929.eps

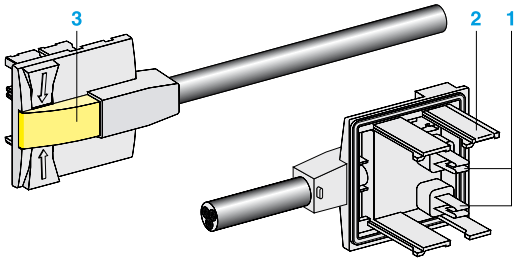

Pre-wired 10 A tap-off unit with fixed polarity


Pre-wired with SO5Z1Z1-F 3 x 1.5 mm² cable, 0.80 m long, pre-stripped on luminaire end:

- 10 A rating
- fixed L + N + PE polarity
- the various models make it possible to balance 3-phase distribution systems.

The colour of the lock and the casing enable remote identification of the polarity.

- 1 Live-conductor contacts.
- 2 Protective-conductor contact.
- 3 Lock.

DD210983.eps

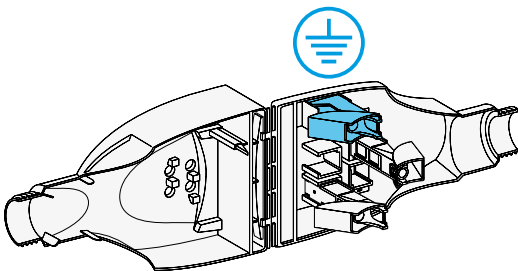


Two-pole 10 A tap-off unit with phase selection

- The two contact studs are movable and can be used to set up both L + N + PE and 2L + PE distribution.
- Supplied complete with a cable gland.

10 A KBC-10DCB20 tap-off unit, 2-pole + PE, to be wired

- To be wired for connection of luminaires using a cable of specific type, size or length.
- Fast connection for 3 x 0.75 to 1.5 mm² cable. If prefabricated leads are used, the line must have 16 A protection (see possibilities of dispensing with protection in the simplified design guide for lighting distribution, in the section on protection against overloads).

DB403930.eps

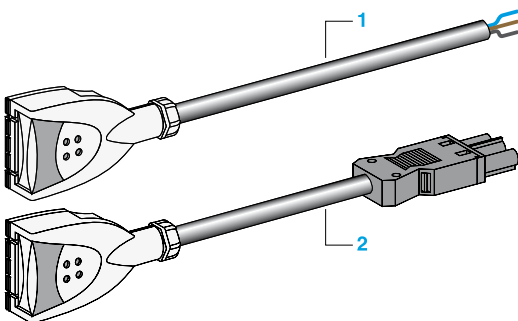


10 A KBC tap-off unit, 2-pole + PE, pre-wired

Two pre-wired versions are available:

- 1 pre-wired with SO5Z1Z1-F 3 x 1.5 mm² cable, 1 m long, pre-stripped on luminaire end,
- 2 for KDP, pre-wired with SO5Z1Z1-F 3 x 1.5 mm² cable, 1 m long and equipped with a female GST18i3 connector on the luminaire end (see prefabricated leads). In this case, The lead is IP40.

If prefabricated leads are used, the line must have 16 A protection (see possibilities of dispensing with protection in the simplified design guide for lighting distribution, in the section on protection against overloads).

DB403931.eps



16 A KBC 16DCB/DCF21 tap-off unit with phase selection

For connection of luminaires using a cable of specific type, size and length.

- Two-pole: L + N + PE (1 mobile stud, fixed neutral) or 2L + PE (2 mobile studs).
- Installation is facilitated by the side guides.
- Supplied with a cable bushing. Terminal connections for 0.75 to 1.5 mm² cable.

KBC 16DCB tap-off unit with terminals, direct connection (no protection)

For direct connection (no protection) of luminaires using a specific cable. Can be equipped with the accessory to tap-off the remote-control circuit to the luminaires.


KBC 16DCF tap-off unit, with fuses

For protection of each luminaire.

Fuse carrier on the phase (1 or 2 carriers depending on the model).

For cylindrical fuse NF 8.5 x 31.5 (not supplied), 16 AgG maximum, breaking capacity 20 kA.

DB403932.eps




16 A L + N + PE tap-off unit with preselected polarity KBC 16DCB/DCF●6


For tap-off and individual protection of luminaires assigned to two independent circuits of 4-conductor KDP trunking.

Identical in design to the tap-off units on the opposite page, but with factory-set polarity.


DD205737.eps



DD205794.eps



DD206064.eps

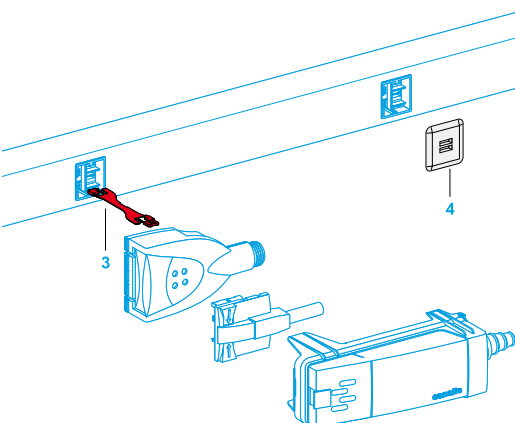

Accessories

Specific to KBC16DCF tap-off units

1 Additional remote-control contact block

- For tap-off of the remote-control circuit to the luminaire (KBB and KBA lines with T option).
- Clips onto KBC16DCB or CF (except KBC16DCF22) tap-off units.
- Terminals for data cable, max. size 2 X 0.75 mm².
- Supplied with cable bushing.

2 Rear support bracket

Additional fixing of KBC16 tap-off units using the rear support bracket may be necessary, notably if there is a risk of accidental pulling on the cable or if the cable is very heavy (great length).

Other accessories

3 Interlocking device

For all 10 A and 16 A tap-off units.

A set of three interlocking devices in different colours can be used to mechanically lock out tap-off units when two or three different distribution networks are present (load, voltage, frequency, etc.).

- An interlocking device is made up of a handle and an interlocking device on each end. It can be used for a tap-off outlet and the corresponding tap-off unit.
- Labels can be placed on the tap-off units and the trunking for remote identification.

4 Outlet blanking plate

Spare part intended to restore IP55 on a tap-off outlet following removal of the tap-off unit (if original blanking plate is lost).

Description


IP55

U_e = 230...400 V

Canalis KDP, 20 A

Busbar trunking for lighting and power socket distribution
Tap-off units

DD21081.eps




10 A units for lighting control

For the control and supply of luminaires in partitioned sites:

- rating 10 A
- phase-selection system for balancing of 3-phase distribution systems
- without pre-wiring, to allow connection of either luminaires or control devices
- cable connection to spring terminals for 0.75 to 2.5 mm² wires
- all units for lighting control are available in versions pre-equipped with GST18i3 connections. In this case, only the circuit supplying the luminaires is pre-equipped. In this case, the IP of lead is IP40.
- if prefabricated connections are used, the line must have 16 A protection (see possibilities of dispensing with protection on page 37).

These units can also be connected to KBA and KBB busbar trunking.


DB403953.eps

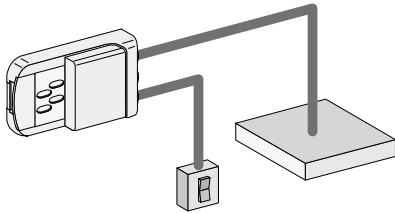

10 A units for single-circuit switching

Can be used to switch one lighting circuit from one location.


DB403954.eps

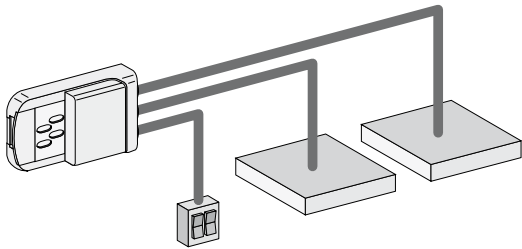

10 A units for double-circuit switching

Can be used to switch two lighting circuits from one location.


DB403955.eps

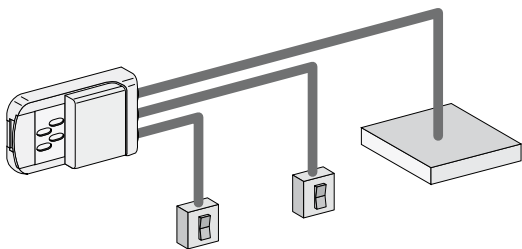

10 A units for two-way switching

Can be used to switch one lighting circuit from two locations.

DB403956.eps

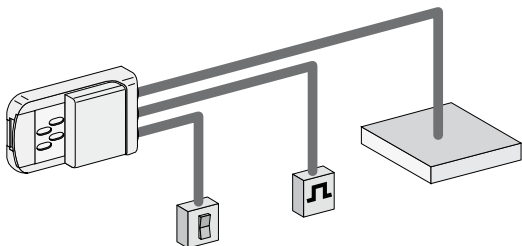

10 A units for control by impulse switch or timer

Can be used to switch one lighting circuit remotely using impulses.

Radio frequency tap-off unit

The radio frequency 6 A connectors, 2 poles + PE, precabled, with phase selection for wireless lighting control

For wireless control and supplying of light fittings in partitioned sites. Used to open and close a lighting circuit controlled by 1 to 32 switches maximum from the Alva's RF range.

The switches and connectors are connected by simple pairing.


- Rating 6 A.
- Phase selection system ensuring balancing on three-phase distributions.
- The two studs are mobile, allowing both L + N + PE and 2L + PE distribution.
- Supplied with cable gland.

Two precabled versions are available:

- 1 precabled with cable SO5Z1Z1-F 3 x 1.5 mm² 1 m long, stripped at the end of the light fitting with compacted stripped conductors,
- 2 with KDP connection, precabled with cable type SO5Z1Z1-F 3 x 1.5 mm², 1 metre long and pre-equipped with a female socket GST18i3 at the end of the light fitting (see prefabricated connections). In this case, the flex is IP40.

If prefabricated connections are used, you need to protect the entire line at 16 A (see the protection waiver cases, see "Simplified study guide for lighting distribution – Overload protection").

These connectors can also be mounted on KBA and KBB busbar trunkings.

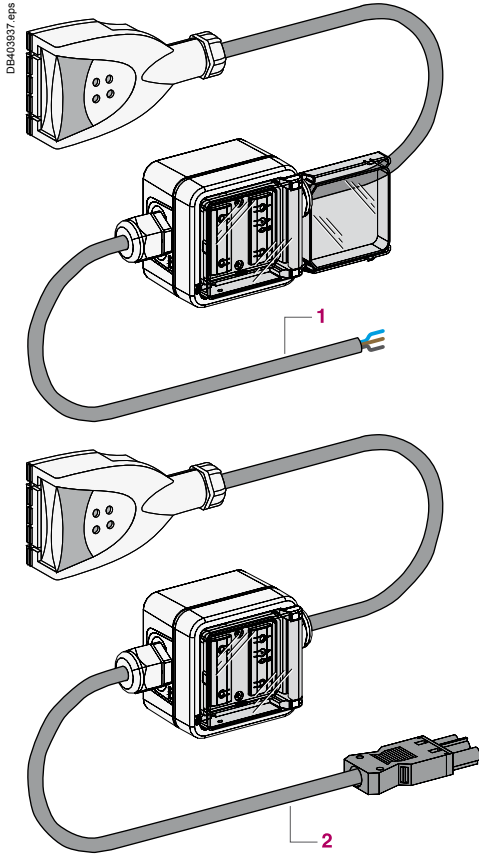

Description

IP55

U_e = 230...400 V

Canalis KDP, 20 A

Busbar trunking for lighting and

power socket distribution

Prefabricated connections


Prefabricated connections

To supply several luminaires from the same KBC tap-off unit, for distribution in false ceilings.


Prefabricated lead

■ Male-female extension lead **KBZ31EFM●●●**.


Cable type SO5Z1Z1-F 3 X 1.5 mm², available in 2, 3, 4, 5, 7 and 9 metre lengths.

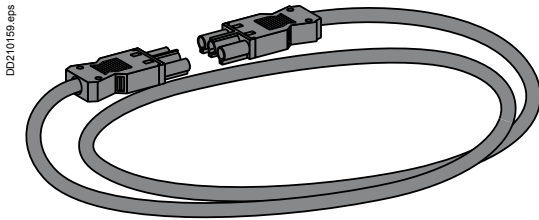

KBZ31EFM●●●

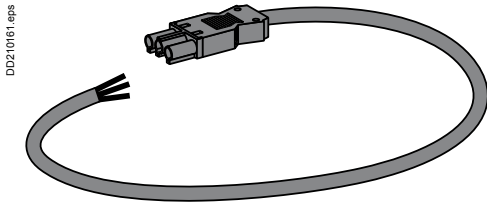

KBZ31EMC●●●

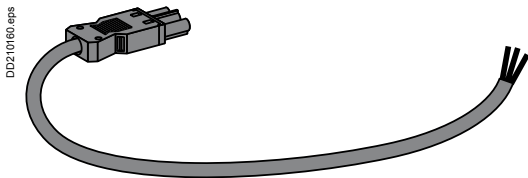

■ Connection lead for luminaires **KBZ31EMC●●●**.

Connection lead with one male end and one end stripped for connection to a luminaire which is not pre-equipped.


Cable type SO5Z1Z1-F 3 X 1.5 mm², available in 1 metre length.

■ Connection lead for tap-off unit **KBZ31EFC●●●**.


Connection lead to be wired, with one female end and one stripped end.

Cable type SO5Z1Z1-F 3 X 1.5 mm², available in 1, 3 and 5 metre lengths.

KBZ31EFC●●●



KBZ32APFR2



KBZ32APMR2


Connectors

■ Female connector **KBZ32APFR2**.


Spring connection for 2 rigid cables 3 x 1.5 to 2.5 mm² or 2 stranded cables 3 x 1.5 to 2.5 mm² fitted with ferrules.

■ Male connector **KBZ32APMR2**.

Spring connection for 2 rigid cables 3 x 1.5 to 2.5 mm² or 2 stranded cables 3 x 1.5 to 2.5 mm² fitted with ferrules.



KBZ32DBA12



KBZ32DBA15


Splitter block

■ Splitter block, 2 outlets **KBZ32DBA12**.

One male input and two female outputs for connection to a pre-wired luminaire.

■ Splitter block, 5 outlets **KBZ32DBA15**.

One male input, five female outputs.



KBZ30ZVP01

Lock

■ Lock **KBZ30ZVP01** for extension leads.

Can withstand pulling forces greater than 20 N on the leads.

Catalogue numbers Dimensions

IP40
U_e = 230...400 V


Canalis KDP, 20 A

Busbar trunking for lighting and power socket distribution

Run components

Catalogue numbers

DB403938.eps

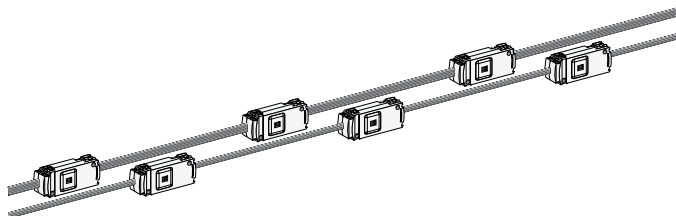

3L + N + PE





Polarity

Distance between tap-offs (mm)	1200
Weight (kg/m)	0.320
24 m spool	KDP20ED424120*
192 m reel	KDP20ED4192120*


* Available up to June 30, 2017.

Dimensions


DD210122.eps

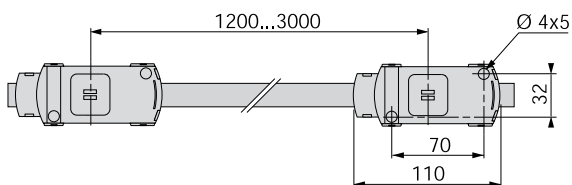

DD210065.eps



DD210065.eps



KDP20ED●●●●●●●●


KDP20ED424120

KDP20ED4192120

Feed units (supplied with end cover)

Catalogue numbers

DB403939.eps




Designation	Feed unit
Mounting	Left or right
Cable connection	Terminals mm² 4
	Cable gland Ø max. (mm) PG 16. Ø 15
Weight (kg)	0.120
Cat. no.	KDP20ABG4*



* Available up to June 30, 2017.

Dimensions


DB403940.eps



DB403940.eps



DD210027.eps



The end cover KDP is a spare part of the after-sales service ref. **KDP20AF**.



Canalis KBA and KBB tap-off units, 25 and 40 A

For lighting and power socket distribution

10 A tap-off unit, direct connection

Catalogue numbers

L + N + PE, with fixed polarity, pre-wired SO5Z1Z1-F 3 x 1.5 mm², 0.8 m long

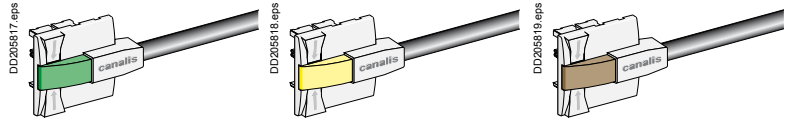


Type of busbar trunking
Single-circuit switching

Balancing on 3 phases or 3-circuit switching

Polarity	L1 + N	L2 + N	L3 + N
Colour of lock	Green	Yellow	Brown
Order in multiples of	10	10	10
Cable length (mm)	800	800	800
Weight (kg)	0.100	0.100	0.100
Cat. no.	KBC10DCS101	KBC10DCS201	KBC10DCS301


L + L + PE or L + N + PE, with phase selection



Type of busbar trunking
All types possible

Polarity	L1 + N or L2 + N or L3 + N L1 + L2 or L1 + L3 or L2 + L3 L2 + N2 or L3 + N3
Order in multiples of	10
Weight (kg)	0.065
Cat. no.	KBC10DCB20


L + L + PE or L + N + PE, with phase selection, pre-wired SO5Z1Z1-F 3 x 1.5 mm², 1 m long



Type of busbar trunking
All types possible

Polarity	L1 + N or L2 + N or L3 + N L1 + L2 or L1 + L3 or L2 + L3 L2 + N2 or L3 + N3
Pre-equipped with female GST18i3 connector	No Yes ⁽¹⁾
Order in multiples of	10 10
Weight (kg)	0.165 0.165
Cat. no.	KBC10DCC211 KBC10DCC21Z

3L + N + PE




Type of busbar trunking
All types possible


Polarity	To be defined for each application (dimmer, emergency lighting, etc.)
Order in multiples of	10
Weight (kg)	0.065
Cat. no.	KBC10DCB40

(1) For IP, see KBA and KBB tap-off units description page 64.

Dimensions



KBC10DCS01

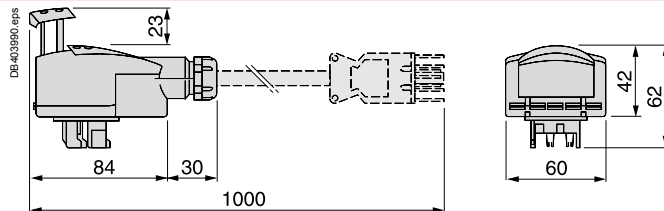

KBC10DCB20, KBC10DCC21, KBC10DCB40

16 A single-phase tap-off unit, with or without fuses


Catalogue numbers

L + N + PE + BUS (D+/D-)




Type of busbar trunking

Single-circuit switching Balancing on 3 phases or 3-circuit switching




Polarity	L + N + PE (D+/D-)	L + N + PE (D+/D-)	L + N + PE (D+/D-)
Colour of lock	Green	Yellow	Brown
Order in multiples of	10	10	10
Cable length (mm)	1000	1000	1000
Cat. no.	KBC16DCS101T	KBC16DCS201T	KBC16DCS301T

L + N + PE + BUS (D+/D-)



Type of busbar trunking


Single-circuit switching Balancing on 3 phases or 3-circuit switching



Polarity	L + N + PE (D+/D-)	L + N + PE (D+/D-)	L + N + PE (D+/D-)
Colour of lock	Green	Yellow	Brown
Order in multiples of	5	5	5
Cable length (mm)	2000	2000	2000
Cat. no.	KBC16DCS102T	KBC16DCS202T	KBC16DCS302T


Catalogue numbers

L + N + PE, with phase selection



Type of busbar trunking

Single-circuit switching Balancing on 3 phases or 3-circuit switching




Polarity	L1 + N or L2 + N or L3 + N	
Scheme		
Protection	None	Cylindrical fuse NF 8.5 x 31.5 16 A gG maximum (not supplied)
Colour of lock	Blue	Blue
Order in multiples of	10	10
Weight (kg)	0.090	0.090
Cat. no.	KBC16DCB21	KBC16DCF21

L + L + PE, with phase selection



Type of busbar trunking

Balancing on 3 phases without neutral



Polarity	L1 + L2 or L1 + L3 or L2 + L3	
Scheme		
Protection	None	Cylindrical fuse NF 8.5 x 31.5 16 A gG maximum (not supplied)
Colour of lock	Yellow	Yellow
Order in multiples of	10	10
Weight (kg)	0.090	0.090
Cat. no.	KBC16DCB22	KBC16DCF22

Canalis KBA and KBB tap-off units, 25 and 40 A For lighting and power socket distribution


16 A single-phase tap-off unit, with or without fuses

Catalogue numbers

L + N + PE, with preselected polarity





Type of busbar trunking
2 single-phase circuits



Polarity	L2 + N2		L3 + N3	
Scheme				
Protection	None	Cylindrical fuse NF 8.5 x 31.5 16 A gG maximum (not supplied)	None	Cylindrical fuse NF 8.5 x 31.5 16 A gG maximum (not supplied)
Colour of lock	Blue	Blue	Blue	Blue
Order in multiples of	10	10	10	10
Weight (kg)	0.090	0.090	0.090	0.090
Cat. no.	KBC16DCB226	KBC16DCF226	KBC16DCB216	KBC16DCF216

Dimensions

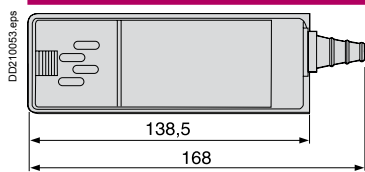

KBC16DC2●●, KBC16DC●2●6


16 A three-phase tap-off unit, with or without fuses

Catalogue numbers

3L + N + PE



Type of busbar trunking
All types possible




Polarity	3L + N	
Scheme		
Protection	None	Cylindrical fuse NF 8.5 x 31.5 12 A gG maximum (not supplied)
Weight (kg)	0.090	0.090
Cat. no.	KBC16DCB40	KBC16DCF40


16 A three-phase tap-off unit, with or without fuses

Catalogue numbers

3L + N + PE, with power socket



Type of busbar trunking





Polarity	3L + N	
Scheme		
Type of power socket	NF 2P + T 10/16 A, 250 V	VDE 2P + T 10/16 A, 250 V
Protection	Cylindrical fuse NF 8.5 x 31.5 16 A gG maximum (not supplied)	Cylindrical fuse NF 8.5 x 31.5 16 A gG maximum (not supplied)
Weight (kg)	0.090	0.090
Cat. no.	KBC16DCP1	KBC16DCP2


Dimensions



KBC 16DC40

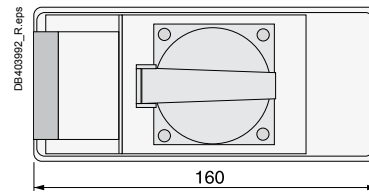

KBC16DCP




10 A single-phase tap-off unit for lighting control

For KDP description, see page 66. For KDP catalogue numbers and dimensions, see page 69.

Accessories for KBA and KBB tap-off units

Catalogue numbers




Designation	Bus connection device	Rear support bracket
Function	For 16 A single-phase or three-phase tap-off units to tap off the remote control circuit of the trunking to the remote receiver	For securing 16 A single-phase tap-off units to the trunking
Order in multiples of	10	10
Weight (kg)	0.010	0.020
Cat. no.	KBC16ZT1	KBC16ZC1


Canalis KDP, 20 A

Busbar trunking for lighting and power socket distribution
 Assembly of trunking components

Assembling the uncoiler kit

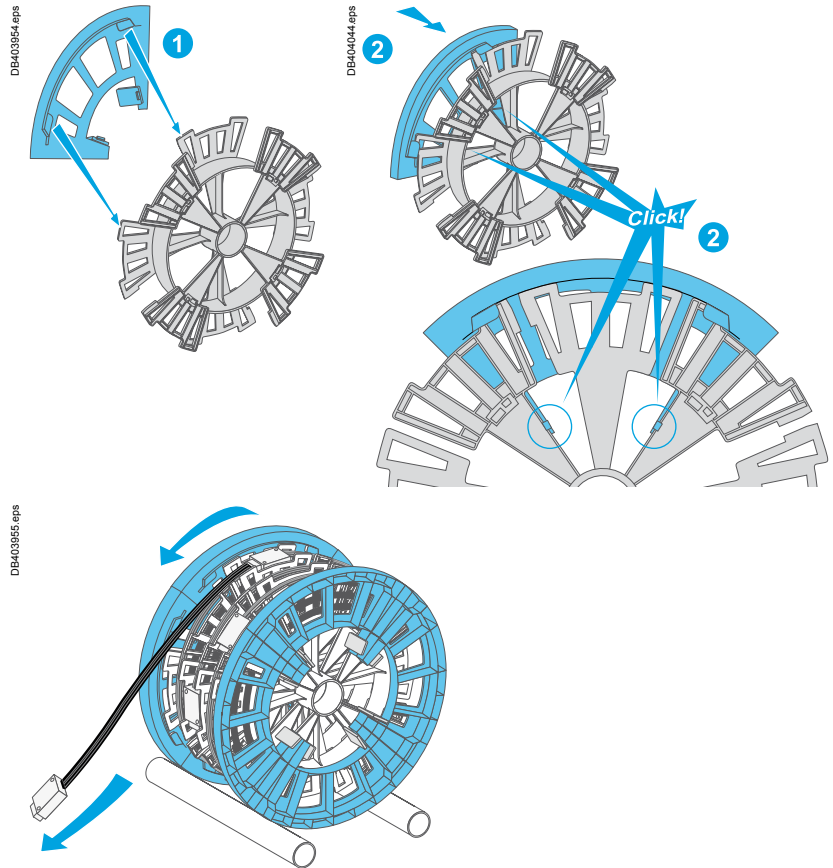


Connecting the feed unit

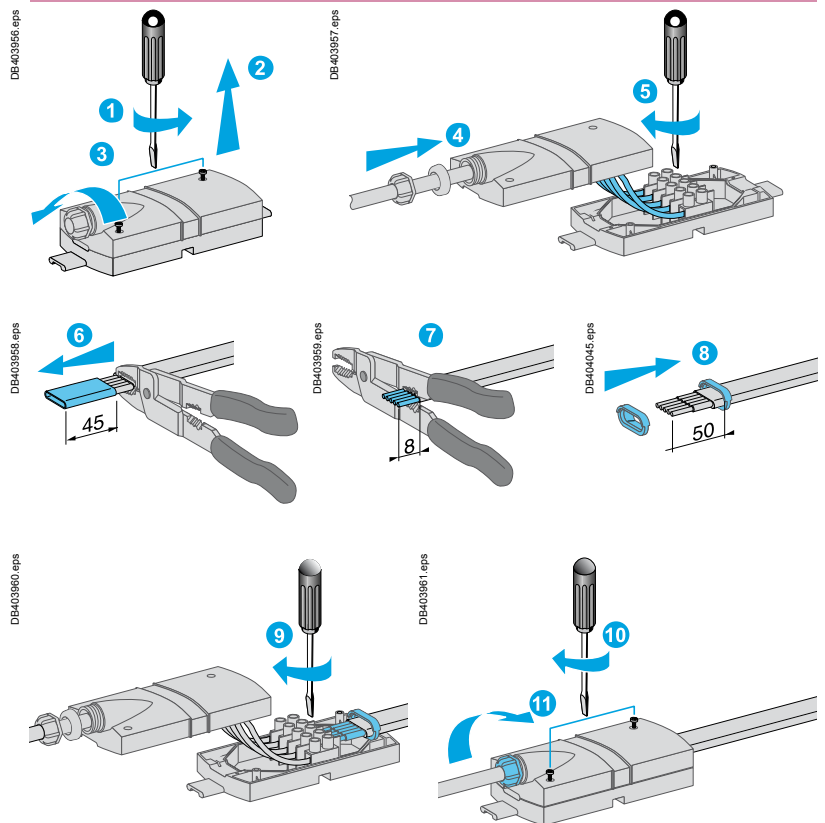

Fixing Canalis KDP on its support


DB403962.eps

Mounting on mesh trays

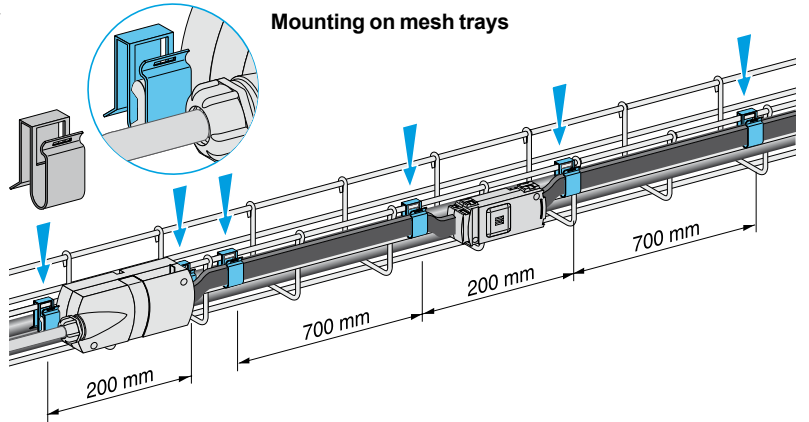


DB403963.eps

Mounting on pre-slotted sheet-metal cable trays

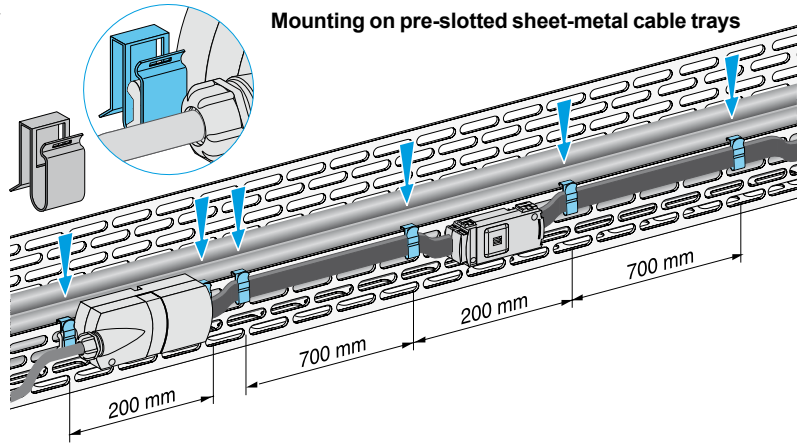


DB403964.eps

Mounting under a concrete slab

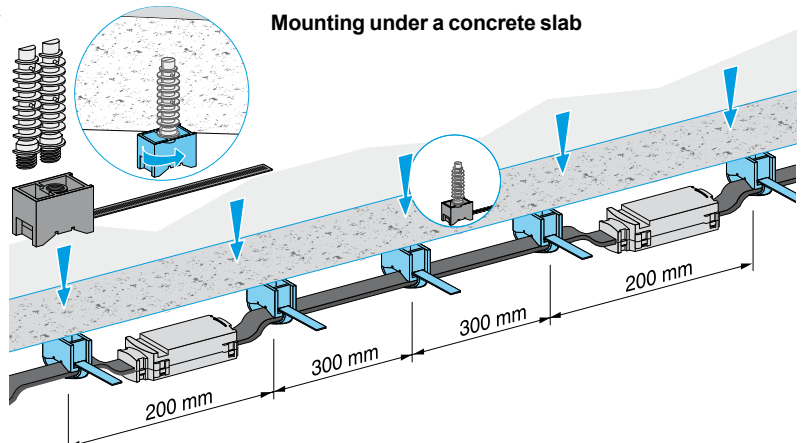

DB403965.eps

Mounting on a metal structure

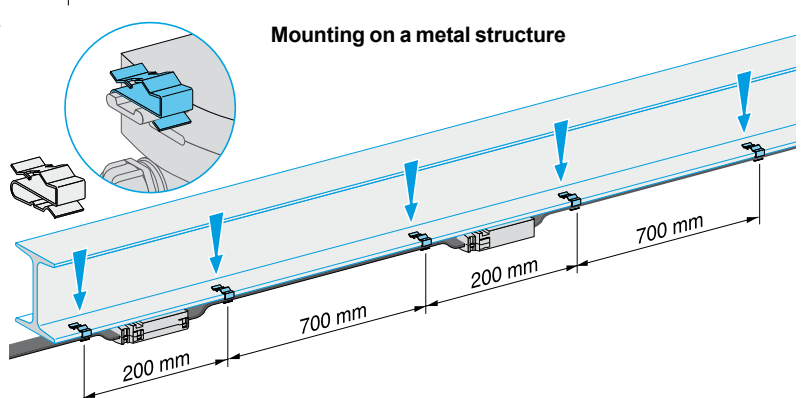


Canalis KDP, 20 A

Busbar trunking for lighting and power socket distribution

Assembly of trunking components


Assembling the prefabricated connections to supply luminaires by bridge connection

DD210344.eps

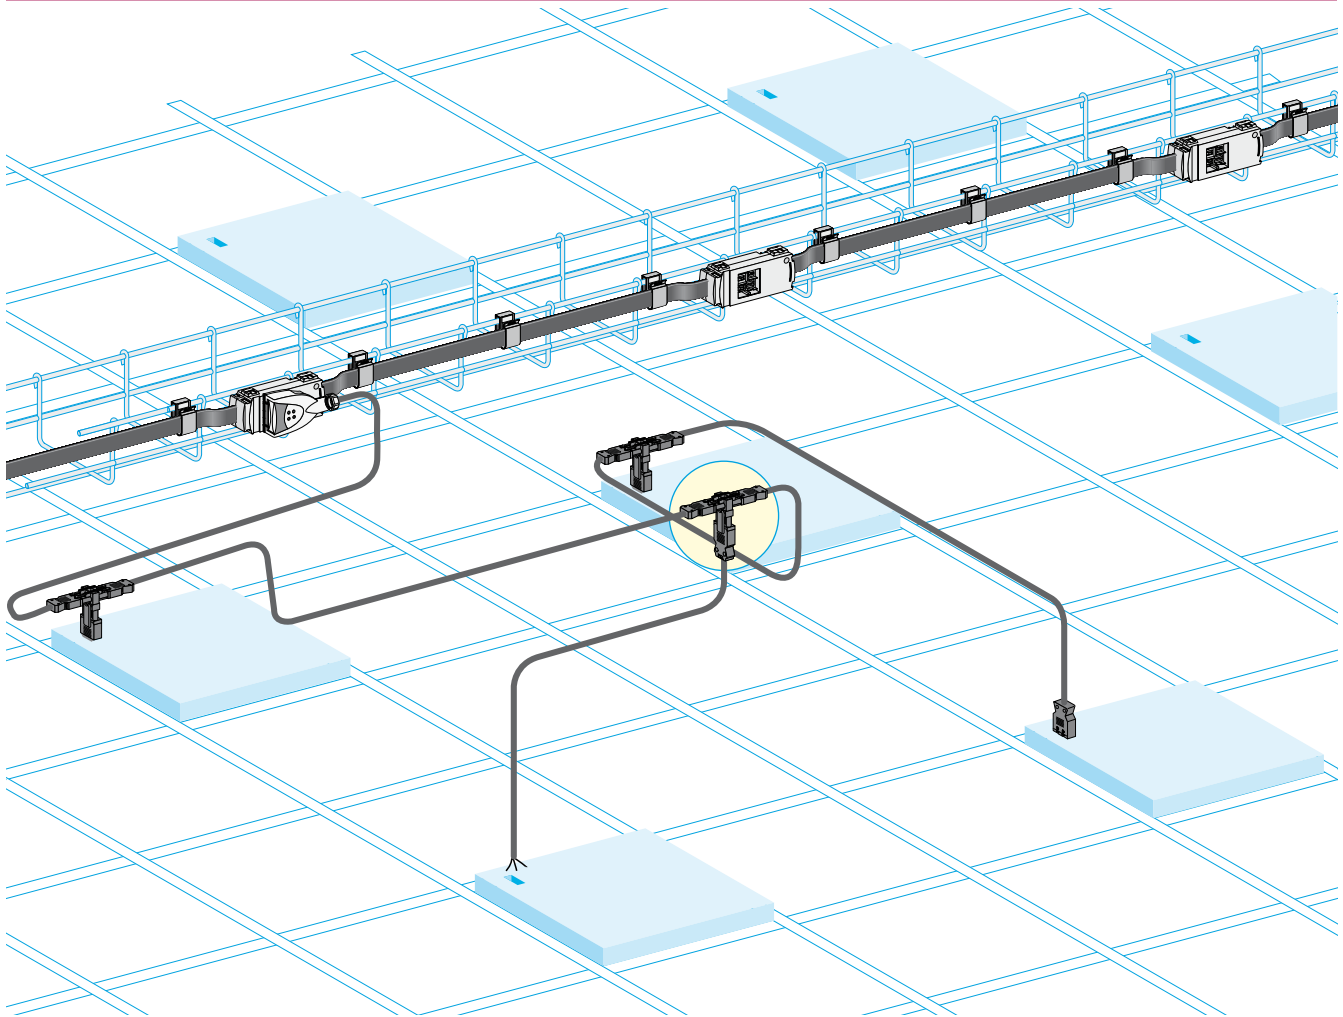

Connection to KDP

D194038E6.eps



Solution 1

Pre-wired tap-off unit equipped with female GST18i3 connector.

Solution 2


Tap-off unit to be wired plus female lead with end stripped.

Solution 3

Tap-off unit to be wired plus female GST18i3 connector (cable not supplied).

Connection to luminaires

KBZ 32DBA12

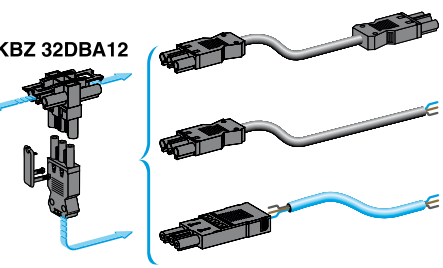

Solution 1

Male/female lead for luminaires equipped with a GST18i3 connection.

Solution 2


Male lead with end stripped for connection to a luminaire.

Solution 3

Male plus female connectors to be wired (cable not supplied).

Assembling the prefabricated leads to supply luminaires by star connection


DD210346.eps

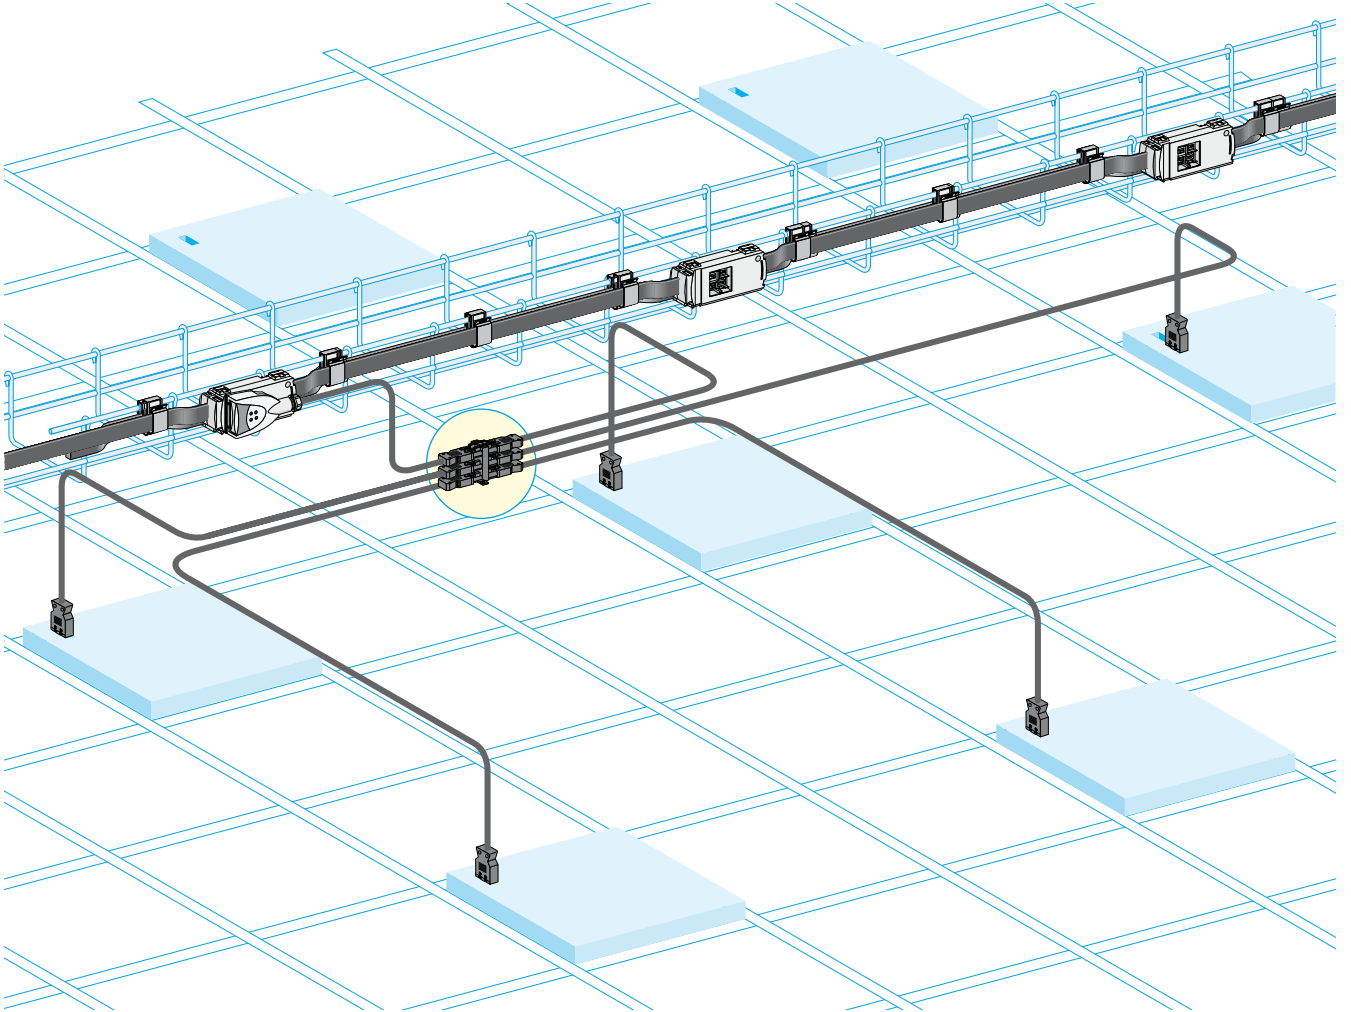

Connection to KDP

Connection to luminaires

D6403867.eps

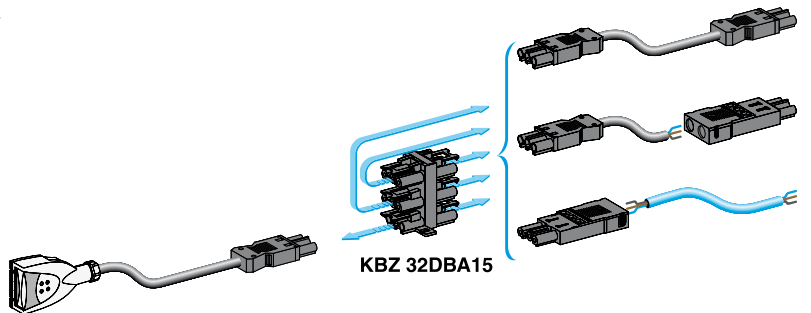

Solution 1
Male/female lead for luminaires equipped with a GST18i3 connection.

Solution 2
Male lead with end stripped for connection to a luminaire.

Solution 3
Male connector to be wired (cable not supplied).

<i>Index</i>	3
<i>Introduction</i>	9
<i>Design guides and characteristics</i>	29
<i>Canalis KDP</i>	57

Presentation

Canalis KBA	80
For lighting and power socket distribution	80

Description

Canalis KBA	84
Busbar trunking for lighting and power socket distribution	84
Canalis KDP, KBA and KBB	87
Busbar trunking for lighting and power socket distribution	87
Tap-off units	87

Catalogue numbers - Dimensions

Canalis KBA	89
Busbar trunking for lighting and power socket distribution	89
Optional remote-control circuit (code T)	89
Canalis KBA and KBB tap-off units	93
For lighting and power socket distribution	93

<i>Canalis KBB</i>	99
<i>Canalis KN</i>	121
<i>Canalis KS</i>	153
<i>Canalis KS riser</i>	205
<i>Canalis KT</i>	225
<i>Technical specifications</i>	231
<i>Maintenance</i>	239
<i>Recommendations for special applications</i>	243
<i>Catalogue numbers</i>	273
<i>Canalis worldwide</i>	279

Canalis KBA

For lighting and power socket distribution
25 and 40 A

DD202764R.eps



1. Run components

- Rating: 25 or 40 A.
- 2 or 4 live conductors.
- Basic lengths: 2 and 3 metres.

PD202163R.eps



2. Feed units and end covers

- The feed units delivered with the end coverry receive the cables supplying one end of Canalis KBA trunking.

PD202164R.eps





3. Fixing system and cable trays

- The fixing system ensures that Canalis KBA is well secured, whatever the type of building structure. There are also fixings to secure the luminaires to Canalis KBA.
- A metal duct is available for running other circuits such as emergency lighting, low-current circuits, etc.

PD202165.eps



4. Tap-off units

- The 10 and 16 A tap-off units pre-wired or not, offer phase selection or fixed polarities, and can be used on KDP, KBA and KBB ranges.

PD202439.eps



Canalis KBA

For lighting and power socket distribution
25 and 40 A



No toxic emission in case of fire

All components in the KBA range are **halogen free**.
In case of fire, Canalis KBA does not release smoke or toxic gases.




DD202141_eps

PD202109RW_eps



Fast and easy mounting

Canalis KBA components can be assembled in just a few clicks.

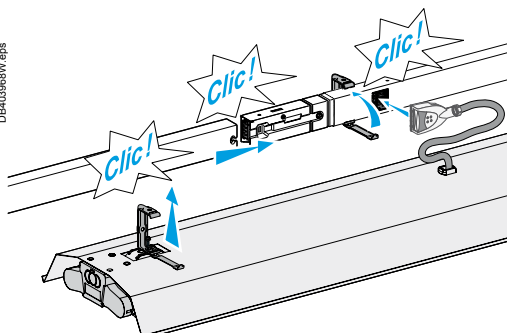

DB40398W_eps

A high degree of protection

- **IP55** guarantees trunking protection against splashes and dust.
- Canalis KBA complies with **sprinkler tests**, guaranteeing operation under vertically and horizontally sprayed water for 50 minutes.

The high degree of protection for Canalis KBA means it can be installed in all types of buildings.




DD0202142_r_eps




Very rigid

Canalis KBA trunking forms a rigid beam, even at the junction between two lengths.

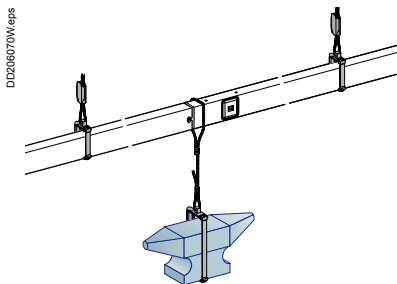

Three levels of illumination

By using three-phase trunking, it is possible to create up to three levels of illumination.

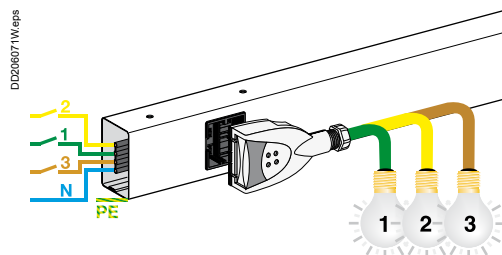

Description

IP55

U_e = 230...400 V

RAL 9003 white


Canalis KBA, 25 and 40 A

Busbar trunking for lighting and power socket distribution

Run components

Carry current, support and supply the luminaires.

Straight lengths

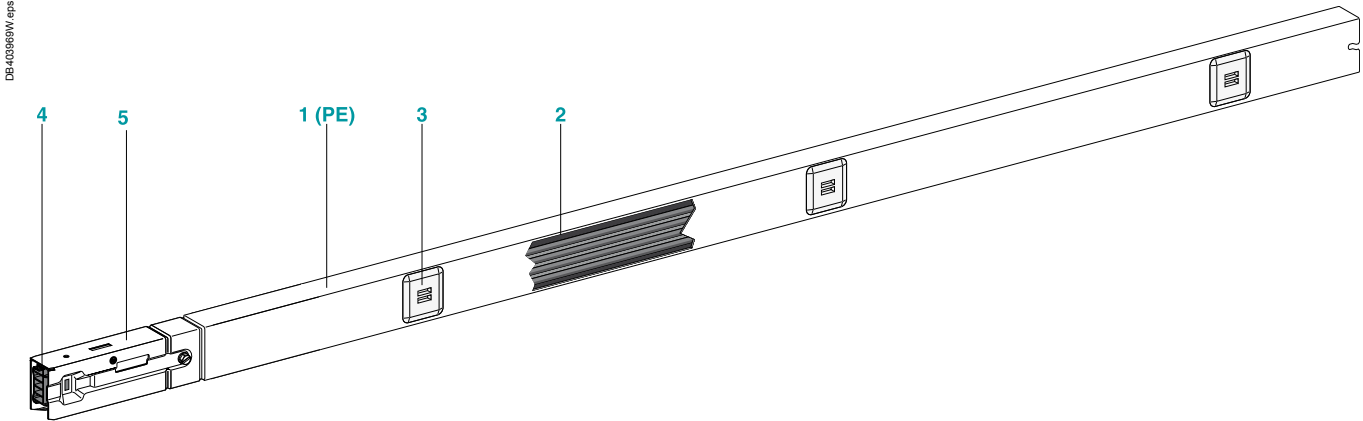

Straight lengths constitute the basic structure of the line and are made up of:

- 1 an all-in-one carrier casing, crimp closed, forming a rigid beam made of sheet steel, in RAL 9003 white lacquered sheet steel, hot galvanised on both sides. This casing also acts as the protective earth conductor (PE),
- 2 a ribbon cable with two or four copper conductors,
- 3 one, two, three or five tap-off outlets,
- 4 an electrical jointing unit ensuring automatic and simultaneous connection of all live conductors,
- 5 a mechanical joining device made of galvanised sheet steel that makes the connection of two lengths rigid and resistant to bending.

The degree of protection is IP55 (without accessories).

The busbar trunking is non-flame-propagating as per the recommendations of standard IEC 60332-3. All the insulating and plastic materials are **halogen-free** and have enhanced fire-withstand capabilities (incandescent wire test as per standard IEC 60695-2).


- 960 °C for components in contact with live parts.
- 650 °C for other components.

Feed units and end covers

Supply a Canalis KBA line.
They clip on (jointing unit) to the end of the line.

The end cover for the opposite end of the line is supplied with each feed unit.

- 1 Feed unit, 1 circuit (25 and 40 A ratings).
- 2 Line outlet box (for rating 40 A only).

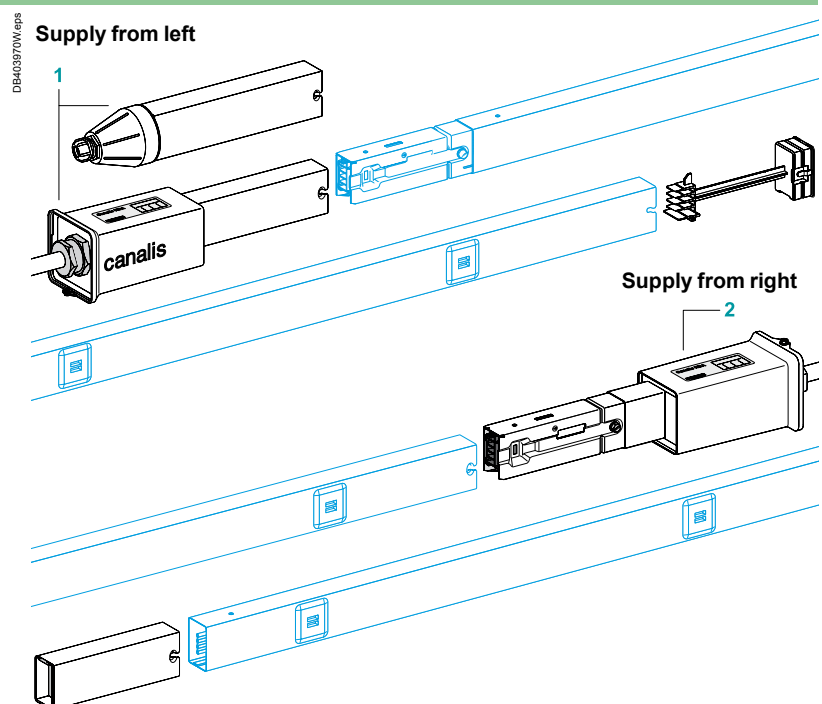


Flexible lengths

Flexible length

For changes in direction or levels and detours around obstacles.

It is mounted in the same way as a straight length.

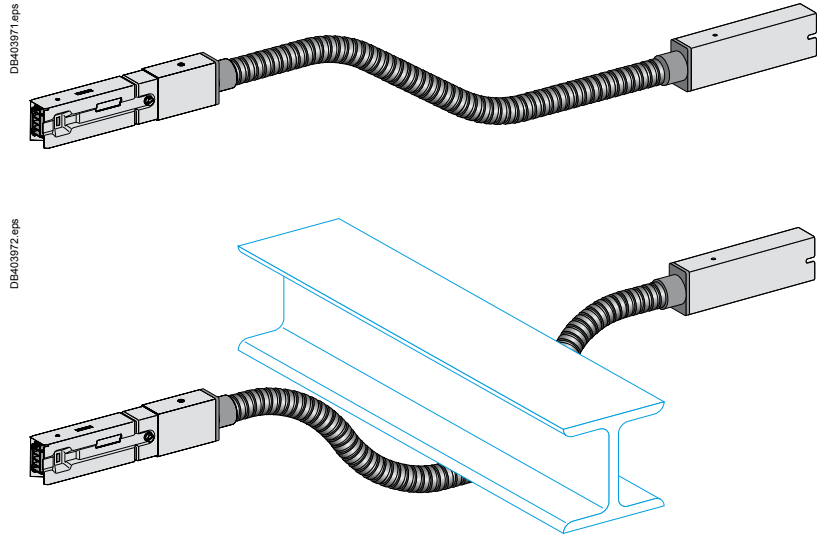

Fixing systems

Busbar trunking

For attachment of the busbar trunking to the structure of the building, either directly or via a threaded rod, chain or steel cable (the latter two with a pigtail hook or a closed ring).

- Designed to relieve the installer of the weight of the busbar trunking once placed in a bracket.
- Automatic locking of moving part on closing (unlocking requires a tool).
- The maximum recommended fixing distance is: 3 metres.

1 Universal fixing bracket

For suspension on a threaded rod, diameter 6 mm.
For horizontal mounting on a beam, pendant, wall, etc.

2 Cable suspension system

Cuts mounting time of the fixing system to one-third of that required for threaded rods.
Enables height adjustment of the trunking.

3 Adjustable, threaded-rod suspension system


For suspension on a threaded rod, diameter 6 mm.
A spring system locks the threaded rod in position for fast adjustment of the trunking.

4 Pigtail hook

For suspension by a chain.

5 Closed ring

For suspension by a steel cable.

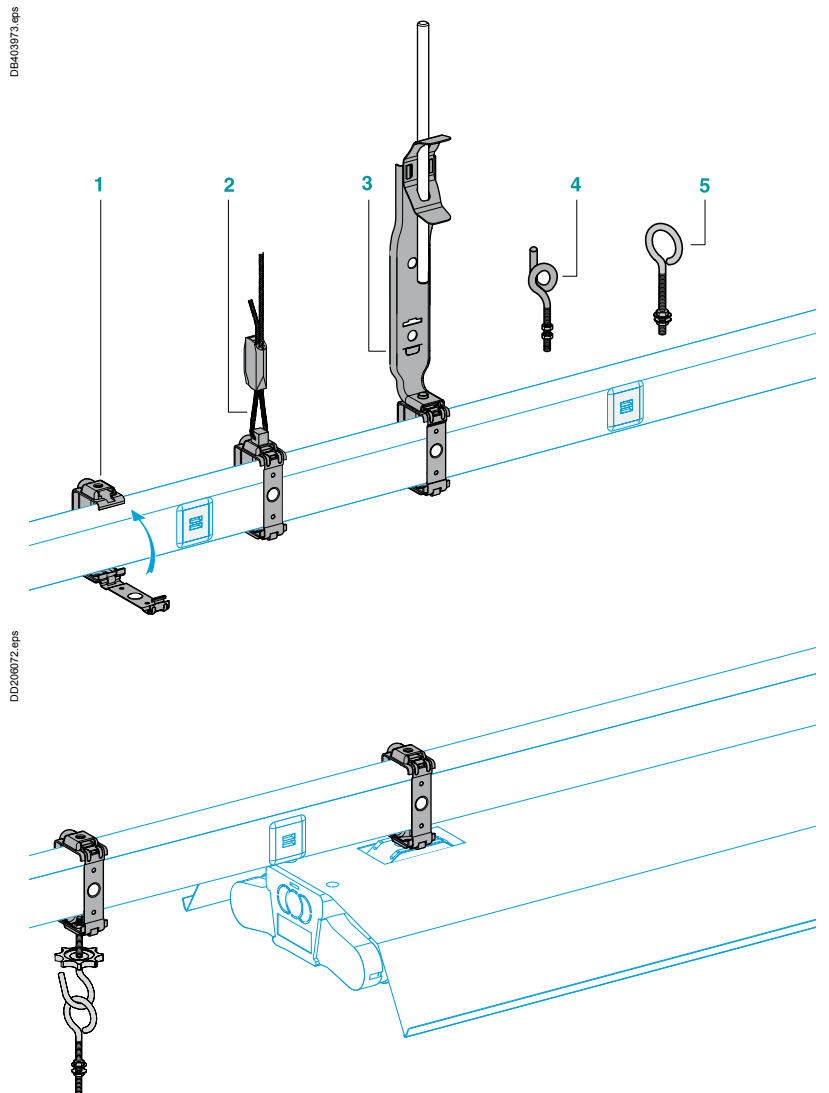

Luminaires

Attached to the luminaires before mounting, these fixings ensure fast and direct fixing to Canalis KBA.

- Same catalogue numbers as the busbar fixings.
- Automatic locking of moving part on closing.
- Use with an open hook and/or closed ring enables suspension.

Description

IP55

U_e = 230...400 V

RAL 9003 white

Canalis KBA, 25 and 40 A

Busbar trunking for lighting and power socket distribution

Cable support


For running adjacent circuits such as emergency lighting, low-current circuits, etc.

1 Cable brackets

Clips to trunking for fast mounting. It is possible to run three cables (diameter 5 to 16 mm) and two IRL tubes.

2 Cable duct

The cable duct fits on support KBB40ZFG1, which in turn fits onto a threaded rod suspension system KBA40ZFP. An intermediate support is placed between the duct and the trunking if the distance between the suspension points exceeds 2 metres. Each duct is equipped with a connection device.

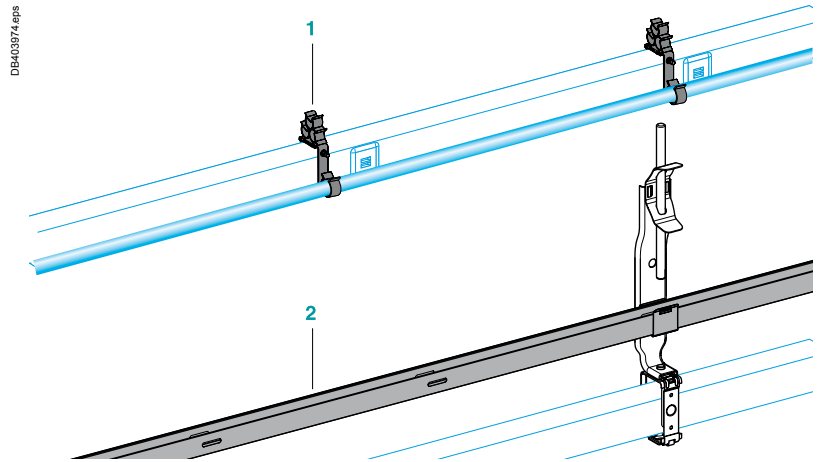

Options

Empty length (no electric circuit)


Used to adjust line length to building dimensions (e.g. to reach a fixing point). Two metres long, can be cut on site.

Optional remote-control circuit (code T)

Factory mounted, an SELV remote-control circuit (U 50 V) is available for the loads supplied by the KBA trunking. The main applications are:

- remote control (rest mode or testing) of self-contained emergency lighting units,
- dimmer control,
- transmission on a building automation bus (please contact us).


The system is built in compliance with IEC 61439-6 and the LV and EMC directives.

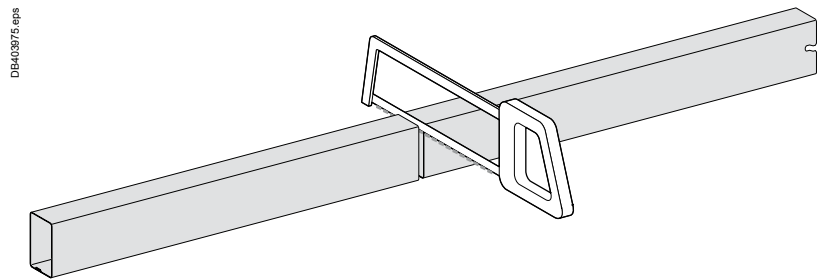

Electrical characteristics of the remote-control circuit

Composition	Twisted pair, unshielded (10 twists/m)	
Cross-section and type of conductor	mm ²	2 x 0.75 copper
Rated insulation voltage U _i (between power circuit and bus)	V	500
Rated operational voltage U _e (max. U between bus + and - poles)	V	50
Maximum operational current I _e	A	2
Linear resistance	mΩ/m	52
Linear capacitance	pF/m	30
DALI recommended length	m	150

- 1 The remote-control circuit is factory mounted next to the main circuit in the trunking (in front for two-circuit trunking).
- 2 Electrical jointing unit equipped with additional bus contacts. Installation of components fitted with option T requires no additional assembly operations.
- 3 Each tap-off outlet is equipped with dual output contacts to tap-off the remote-control circuit to the receiver.
- 4 Connection of the remote-control receiver using a KBC-16DCB or DCF tap-off unit equipped with a KBC16ZT1 contact-block accessory.
- 5 Feed units equipped with an additional bus terminal block.

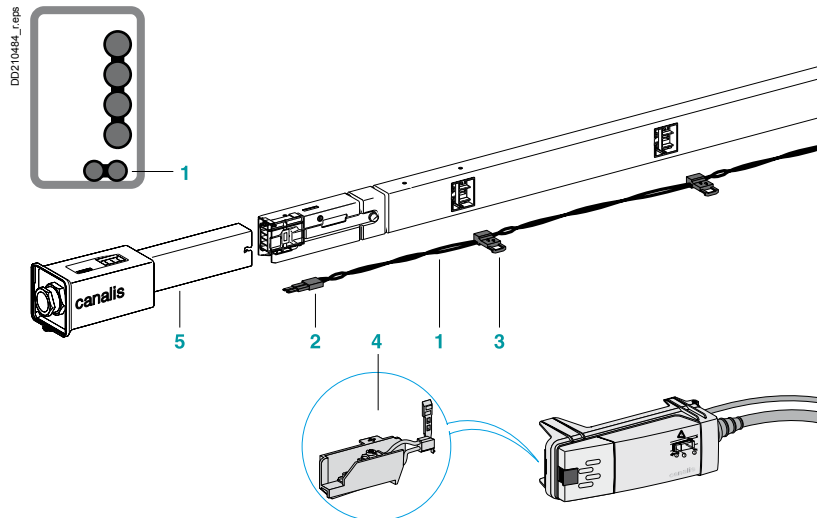

Possibility to use KBA/KBB with T option to transport and distribute DALI protocol for lighting management. DALI stands for Digital Addressable Lighting Interface and is a protocol set out in the technical standard IEC 62386.



www.dali-ag.org


Description

IP55

U_e = 230...400 V

Canalis KDP, KBA and KBB

Busbar trunking for lighting and power socket distribution Tap-off units

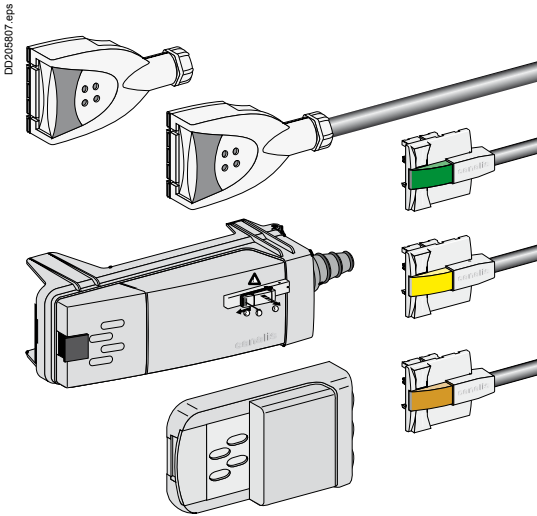


Tap-off units (general)

For instantaneous connection of luminaires to KDP busbar trunking:

- they can be handled while energised and under live conditions
- the contacts for live conductors are of the clamp type
- PE connection occurs before that of the phases and neutral
- phase-selection system (clip-in contact studs) for balancing of 3-phase distribution systems
- selection is visible via a transparent window
- a coloured lock holds them in the tap-off outlet
- all the insulating and plastic materials have a high fire-retardant capacity:
 - incandescent-wire test in compliance with IEC 60695-2:
 - 960 °C for components in contact with live parts,
 - 650 °C for other components.

All the insulators and plastic components are **halogen free**.

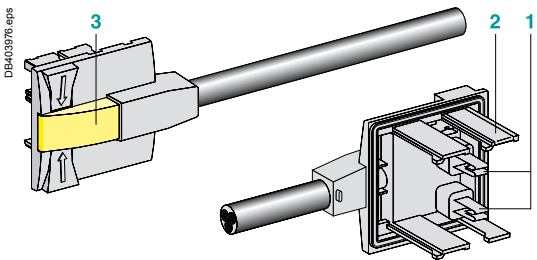

Pre-wired 10 A tap-off unit with fixed polarity

Pre-wired with SO5Z1Z1-F 3 x 1.5 mm² cable, 0.80 m long, pre-stripped on luminaire end:

- 10 A rating
- fixed L + N + PE polarity
- the various models make it possible to balance 3-phase distribution systems.

The colour of the lock and the casing enable remote identification of the polarity.

- 1 Live-conductor contacts.
- 2 Protective-conductor contact.
- 3 Lock.

Two-pole 10 A tap-off unit with phase selection

- The two contact studs are movable and can be used to set up both L + N + PE and 2L + PE distribution.
- Supplied complete with a cable gland.

10 A KBC-10DCB20 tap-off unit, 2-pole + PE, to be wired



- To be wired for connection of luminaires using a cable of specific type, size or length.
- Fast connection for 3 x 0.75 to 1.5 mm² cable. If prefabricated leads are used, the line must have 16 A protection (see possibilities of dispensing with protection in the simplified design guide for lighting distribution, in the section on protection against overloads).

10 A KBC tap-off unit, 2-pole + PE, pre-wired

Two pre-wired versions are available:

- 1 pre-wired with SO5Z1Z1-F 3 x 1.5 mm² cable, 1 m long, pre-stripped on luminaire end,
- 2 for KDP, pre-wired with SO5Z1Z1-F 3 x 1.5 mm² cable, 1 m long and equipped with a female GST18i3 connector on the luminaire end (see prefabricated leads). In this case, the lead is IP40.

If prefabricated leads are used, the line must have 16 A protection (see possibilities of dispensing with protection in the simplified design guide for lighting distribution, in the section on protection against overloads).

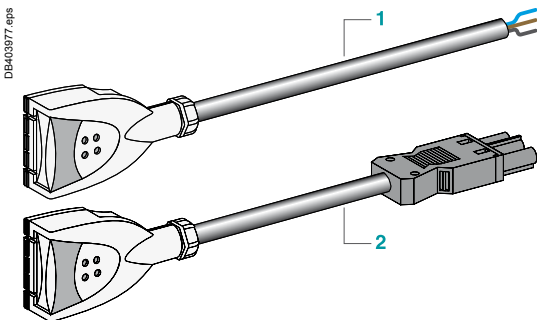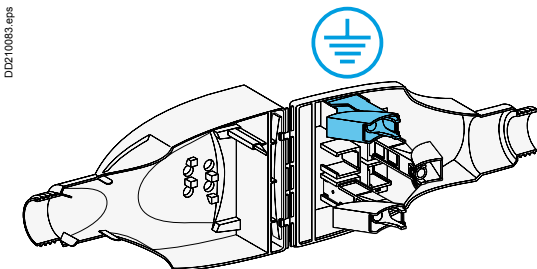

Description

IP55

U_e = 230...400 V


Canalis KDP, KBA and KBB

Busbar trunking for lighting and

power socket distribution

Tap-off units

DB403931.eps



16 A KBC 16DCB/DCF21 tap-off unit with phase selection

For connection of luminaires using a cable of specific type, size and length.

- Two-pole: L + N + PE (1 mobile stud, fixed neutral) or 2L + PE (2 mobile studs).
- Installation is facilitated by the side guides.
- Supplied with a cable bushing. Terminal connections for 0.75 to 1.5 mm² cable.

KBC16DCB tap-off unit with terminals, direct connection (no protection)

For direct connection (no protection) of luminaires using a specific cable. Can be equipped with the accessory to tap-off the remote-control circuit to the luminaires.


KBC16DCF tap-off unit, with fuses

For protection of each luminaire.

Fuse carrier on the phase (1 or 2 carriers depending on the model).

For cylindrical fuse NF 8.5 x 31.5 (not supplied), 16 A gG maximum, breaking capacity 20 kA.

DB403932.eps




16 A L + N + PE tap-off unit with preselected polarity KBC16DCB/DCF●6

For tap-off and individual protection of luminaires assigned to two independent circuits of 4-conductor KBA trunking.

Identical in design to the tap-off units on the opposite page, but with factory-set polarity.

DD209511_r.eps



Accessories

Specific to KBC16DCF tap-off units


1 Additional remote-control contact block

- For tap-off of the remote-control circuit to the luminaire (KBA and KBB lines with T option).
- Clips onto KBC16DCB or CF (except KBC16DCF22) tap-off units.
- Terminals for data cable, max. size 2 x 0.75 mm².
- Supplied with cable bushing.

2 Rear support bracket

Additional fixing of KBC16 tap-off units using the rear support bracket may be necessary, notably if there is a risk of accidental pulling on the cable or if the cable is very heavy (great length).

DD209512_r.eps



Other accessories

3 Interlocking device

For all 10 A and 16 A tap-off units.


A set of three interlocking devices in different colours can be used to mechanically lock out tap-off units when two or three different distribution networks are present (load, voltage, frequency, etc.).

- An interlocking device is made up of a handle and an interlocking device on each end. It can be used for a tap-off outlet and the corresponding tap-off unit.
- Labels can be placed on the tap-off units and the trunking for remote identification.

4 Outlet blanking plate

Spare part intended to restore IP55 on a tap-off outlet following removal of the tap-off unit (if original blanking plate is lost).

DD206073_r.eps

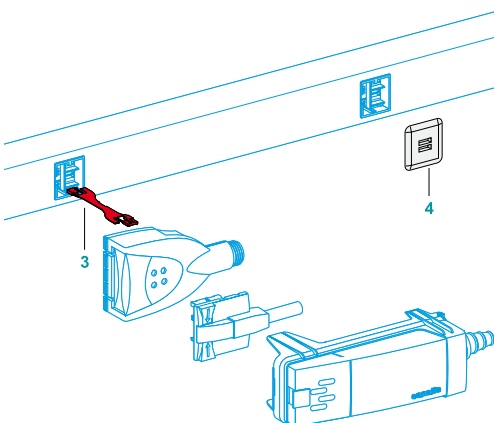

Catalogue numbers Dimensions

IP55

U_e = 230...400 V


RAL 9003 white

Canalis KBA, 25 and 40 A

Busbar trunking for lighting and power socket distribution
Optional remote-control circuit (code T)

Straight lengths

Catalogue numbers

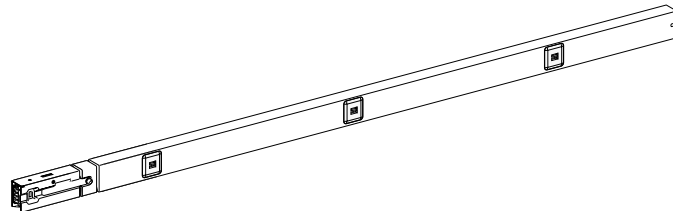

DB4057RW.eps

L + N + PE, straight length standard								
DD21065.eps	PE L1 N	Length (m)	3			2		
		Number of tap-offs	0	2	3	5	2	3
		Order in multiples of	6	6	6	6	6	
Polarité de la canalisation		Option T ⁽¹⁾	-	-	■	■	-	■
		Weight (kg)	2.400	2.400	2.400	2.400	1.900	1.700
		25 A rating Cat. no.	KBA25ED2300W	KBA25ED2302W	KBA25ED2303W	KBA25ED2305W	KBA25ED4202W	KBA40ED2203W
		Weight (kg)	2.700	-	2.700	2.700	-	1.700
		40 A rating Cat. no.	KBA40ED2300W	-	KBA40ED2303W	KBA40ED2305W	-	KBA40ED2203W


3L + N + PE, straight length standard								
DD21065.eps	PE L2 L1 L3 N	Length (m)	3			2		
		Number of tap-offs	0	2	3	5	2	3
		Order in multiples of	6	6	6	6	6	
Polarité de la canalisation		Option T ⁽¹⁾	-	-	■	■	-	■
		Weight (kg)	2.600	2.400	2.600	2.600	1.900	1.900
		25 A rating Cat. no.	KBA25ED4300W	KBA25ED4302W	KBA25ED4303W	KBA25ED4305W	KBA25ED4202W	KBA40ED4203W
		Weight (kg)	3.100	-	3.100	3.100	-	1.900
		40 A rating Cat. no.	KBA40ED4300W	-	KBA40ED4303W	KBA40ED4305W	-	KBA40ED4203W

Empty length

Length (m)	2
Number of tap-offs	0
Order in multiples of	6
Weight (kg)	1.600
25 A rating Cat. no.	KBA40EDA20W
Weight (kg)	1.600
40 A rating Cat. no.	KBA40EDA20W

(1) ■ Option T may be combined. Add T at the catalogue number. Ex: KBA25ED2303TW.

Dimensions

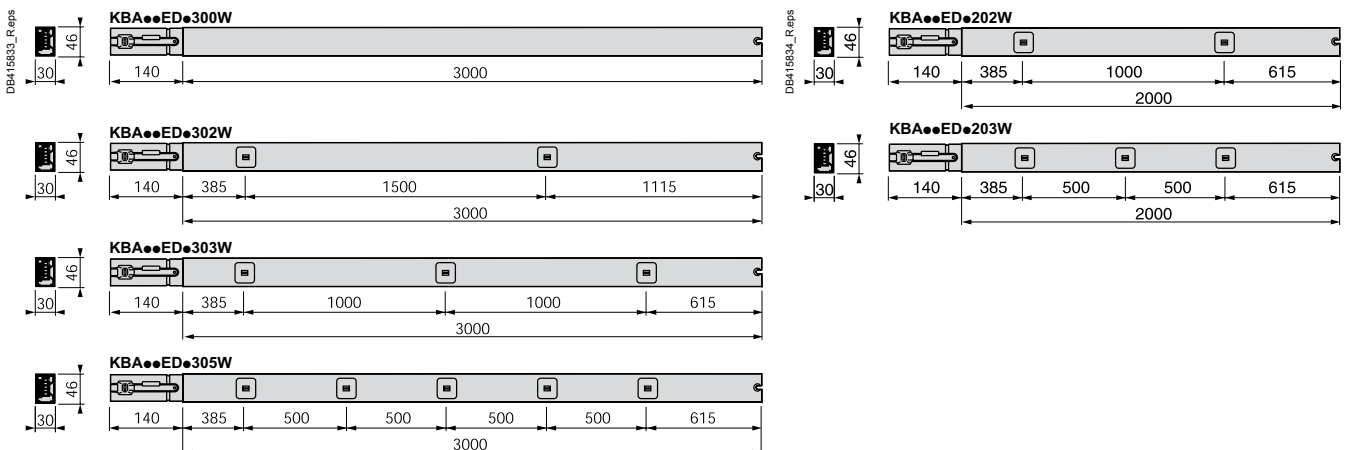

DB415833_R.eps

DB415834_R.eps

Catalogue numbers Dimensions


IP55
U_e = 230...400 V
RAL 9003 white

Canalis KBA, 25 and 40 A

Busbar trunking for lighting and power socket distribution
Optional remote-control circuit (code T)

Feed units (supplied with end cover)


Catalogue numbers

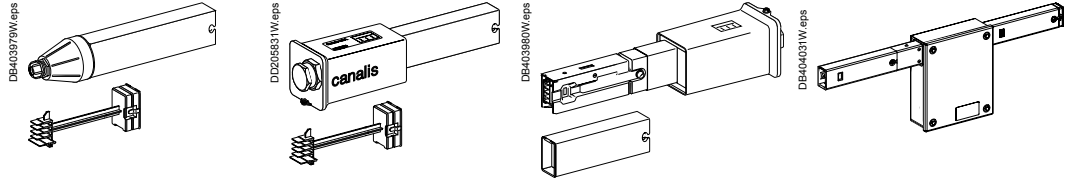

Designation	Feed unit			
Rating (A)	25	25 or 40	25 or 40	25 or 40
Mounting	Left	Left	Central	Right
Cable connection	Terminals (mm²)	4	10	10
	Cable gland max. Ø (mm)	PG 16, Ø 15	PG 21, Ø 19	PG 21, Ø 19
Option (1) T	-	■	■	■
Weight (kg)	0.200	0.400	0.500	0.500
Cat. no.	KBA25ABG4W	KBA40ABG4W	KBA40ABT4W	KBA40ABD4W


(1) ■ Option T may be combined. Add T at the catalogue number. Ex: **KBA40ABG4TW**.
The end cover KBA is a spare part of the after-sales service ref **KBA40AF**

Dimensions

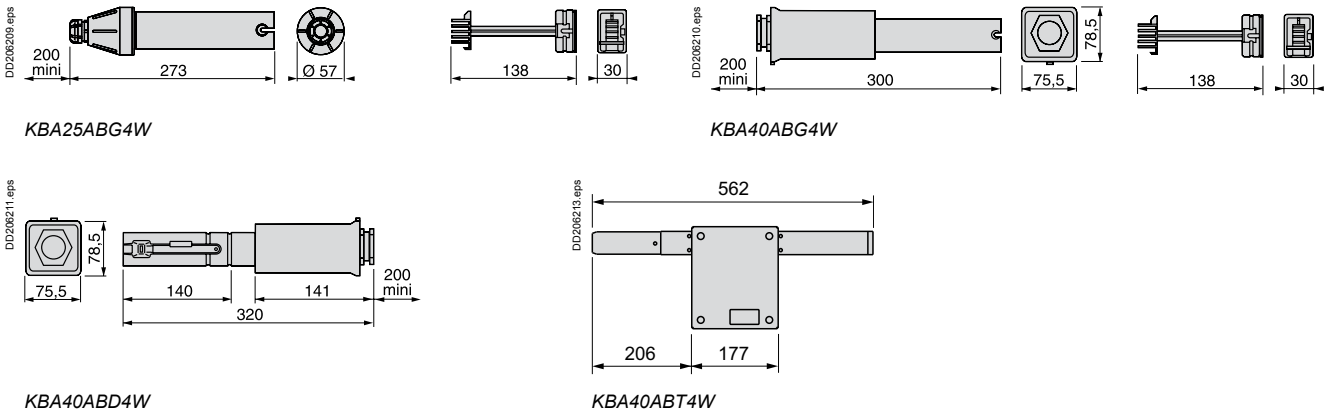

Flexible lengths


Catalogue numbers



Designation	Flexible length	
Mounting	For elbows, changing levels, detours around obstacles, etc.	
Length (m)	0.5	2
Option (1) T	■	■
Weight (kg)	0.050	0.105
Cat. no.	KBA40DF405W	KBA40DF420W

(1) ■ Option T may be combined. Add T at the catalogue number. Ex: **KBA 40DF405TW**.

Dimensions

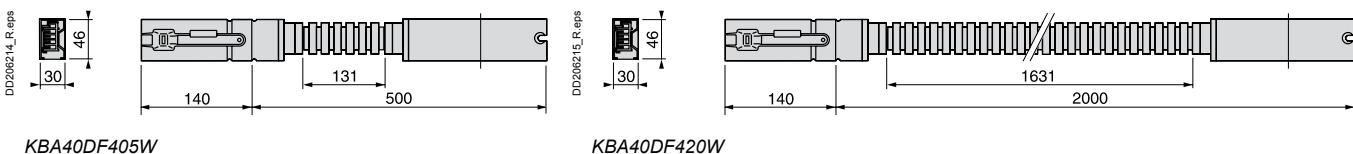

Fixing systems

Catalogue numbers

Busbar trunking fixings



Designation	Universal fixing bracket ⁽¹⁾	Cable suspension system ⁽¹⁾	Spring fixing bracket ⁽¹⁾	Pigtail hook	Raiser		
Mounting	Suspended on threaded rod or lateral (except wall)	Universal fixing bracket with steel cable	Universal fixing bracket for steel cable	Cable alone, 3 m long	Adjustable suspension for threaded rod, M6	Suspended by small chain	For mounting on wall or false floor
Max. load (kg)	60	60	60	60	50	60	60
Order in multiples of	10	10	10	10	10	10	10
Weight (kg)	0.050	0.105	0.105	0.070	0.100	0.020	0.040
Cat. no.	KBA40ZFUW	KBA40ZFSUW	KBA40ZFSLW	KBB40ZFS23	KBA40ZFPU	KBB40ZFC	KBB40ZFMP


Luminaire fixings



Designation	Universal fixing bracket	Open hook	Ring
Mounting	For direct suspension under trunking	To suspend the luminaire	Mounted on the luminaire
Max. load (kg)	60	45	45
Order in multiples of	10	10	10
Weight (kg)	0.050	0.050	0.050
Cat. no.	KBA40ZFUW	KBB40ZFC5	KBB40ZFC6

(1) Maximum recommended distance between fixings: 3 meters.


Dimensions

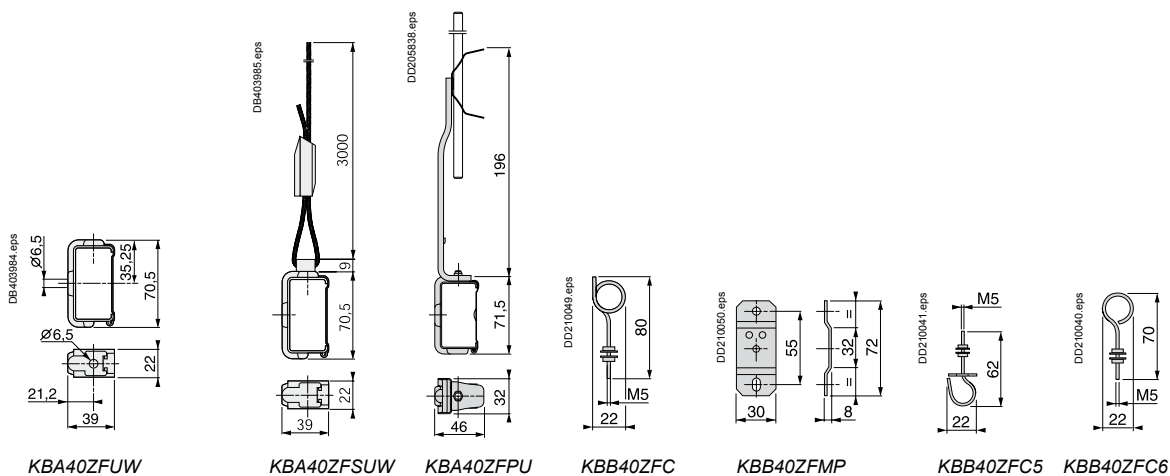

Accessories

Catalogue numbers

Cable duct, support

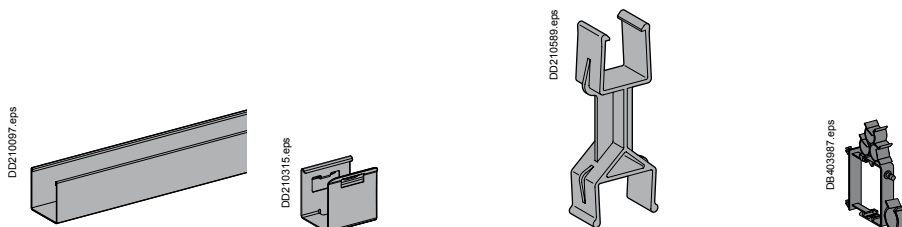


Designation	Cable duct			Cable bracket
Function	Width 25 mm, length 3 m	Cable duct support to be mounted on a spring fixing bracket ⁽¹⁾	Cable duct support + intermediate support ⁽²⁾	For adjacent circuits
Order in multiples of	6	10	10	20
Weight (kg)	1.115	0.100	0.200	0.005
Cat. no.	KFB25CD253	KBB40ZFG1	KBA40ZFG2	KBB40ZFGU

(1) Maximum recommended distance between fixings: 2 meters.


(2) Maximum recommended distance between fixings: 3 meters.

Other accessories

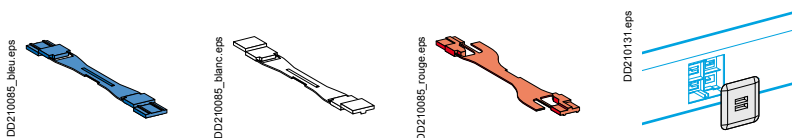

Designation	Outlet/tap-off unit interlocking device (2 parts)			Blanking plate	Cutting pliers
Function	Identification and mechanical interlocking between 1 to 3 different circuits			Restore IP55 on tap-off outlet if original blanking plate is lost	To cut steel cable used for cable suspension system
Colour	Bleu	Blanc	Rouge	-	-
Order in multiples of	20	20	20	10	1
Weight (kg)	0.002	0.002	0.002	0.005	0.300
Cat. no.	KBC16ZL10	KBC16ZL20	KBC16ZL30	KBC16ZB1	KBB40ZFS

Dimensions

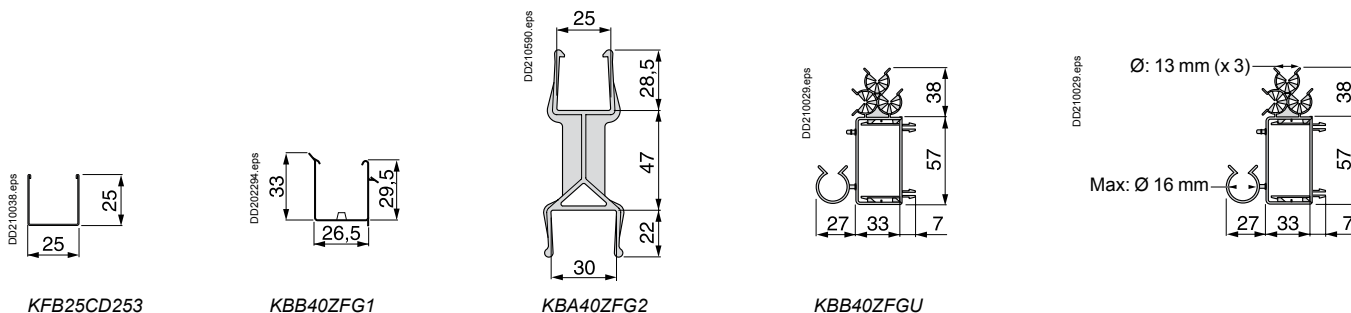

KFB25CD253

KBB40ZFG1

KBA40ZFG2

KBB40ZFGU


Canalis KBA and KBB tap-off units, 25 and 40 A

For lighting and power socket distribution

10 A tap-off unit, direct connection

Catalogue numbers

L + N + PE, with fixed polarity, pre-wired SO5Z1Z1-F 3 x 1.5 mm², 0.8 m long


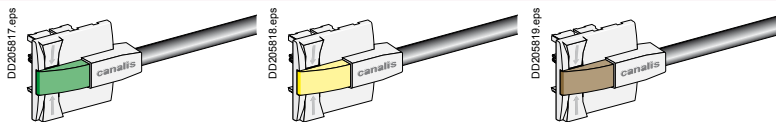


Type of busbar trunking

Single-circuit switching
Balancing on 3 phases or 3-circuit switching

Polarity	L1 + N	L2 + N	L3 + N
Colour of lock	Green	Yellow	Brown
Order in multiples of	10	10	10
Cable length (mm)	800	800	800
Weight (kg)	0.100	0.100	0.100
Cat. no.	KBC10DCS101	KBC10DCS201	KBC10DCS301

L + L + PE or L + N + PE, with phase selection




Type of busbar trunking

All types possible

Polarity	L1 + N or L2 + N or L3 + N L1 + L2 or L1 + L3 or L2 + L3 L2 + N2 or L3 + N3
Order in multiples of	10
Weight (kg)	0.065
Cat. no.	KBC10DCB20

L + L + PE or L + N + PE, with phase selection, pre-wired SO5Z1Z1-F 3 x 1.5 mm², 1 m long




Type of busbar trunking

All types possible

Polarity	L1 + N or L2 + N or L3 + N L1 + L2 or L1 + L3 or L2 + L3 L2 + N2 or L3 + N3
Pre-equipped with female GST18i3 connector	No Yes ⁽¹⁾
Order in multiples of	10 10
Weight (kg)	0.165 0.165
Cat. no.	KBC10DCC211 KBC10DCC21Z

3L + N + PE




Type of busbar trunking

All types possible


Polarity	To be defined for each application (dimmer, emergency lighting, etc.)
Order in multiples of	10
Weight (kg)	0.065
Cat. no.	KBC10DCB40

⁽¹⁾ For IP, see KBA and KBB tap-off units description page 64.

Dimensions



KBC10DCS01

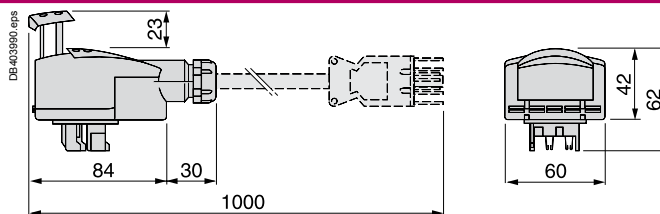

KBC10DCB20, KBC10DCC21, KBC10DCB40

Canalis KBA and KBB

tap-off units, 25 and 40 A

For lighting and power socket distribution


16 A single-phase tap-off unit, with or without fuses

Catalogue numbers

L + N + PE + BUS (D+/D-)



Type of busbar trunking
Single-circuit switching
Balancing on 3 phases or 3-circuit switching




Polarity	L + N + PE (D+/D-)	L + N + PE (D+/D-)	L + N + PE (D+/D-)
Colour of lock	Green	Yellow	Brown
Order in multiples of	10	10	10
Cable length (mm)	1000	1000	1000
Cat. no.	KBC16DCS101T	KBC16DCS201T	KBC16DCS301T

L + N + PE + BUS (D+/D-)




Type of busbar trunking
Single-circuit switching
Balancing on 3 phases or 3-circuit switching




Polarity	L + N + PE (D+/D-)	L + N + PE (D+/D-)	L + N + PE (D+/D-)
Colour of lock	Green	Yellow	Brown
Order in multiples of	5	5	5
Cable length (mm)	2000	2000	2000
Cat. no.	KBC16DCS102T	KBC16DCS202T	KBC16DCS302T

Catalogue numbers

L + N + PE, with phase selection



Type of busbar trunking
Single-circuit switching
Balancing on 3 phases or 3-circuit switching




Polarity	L1 + N or L2 + N or L3 + N	
Scheme		
Protection	None	Cylindrical fuse NF 8.5 x 31.5 16 AgG maximum (not supplied)
Colour of lock	Blue	Blue
Order in multiples of	10	10
Weight (kg)	0.090	0.090
Cat. no.	KBC16DCB21	KBC16DCF21

L + L + PE, with phase selection



Type of busbar trunking
Balancing on 3 phases without neutral



Polarity	L1 + L2 or L1 + L3 or L2 + L3	
Scheme		
Protection	None	Cylindrical fuse NF 8.5 x 31.5 16 AgG maximum (not supplied)
Colour of lock	Yellow	Yellow
Order in multiples of	10	10
Weight (kg)	0.090	0.090
Cat. no.	KBC16DCB22	KBC16DCF22


16 A single-phase tap-off unit, with or without fuses

Catalogue numbers

L + N + PE, with preselected polarity





Type of busbar trunking
2 single-phase circuits



Polarity	L2 + N2	L3 + N3
Scheme		
Protection	None	Cylindrical fuse NF 8.5 x 31.5 16 A gG maximum (not supplied)
Colour of lock	Blue	Blue
Order in multiples of	10	10
Weight (kg)	0.090	0.090
Cat. no.	KBC16DCB226	KBC16DCF226

Dimensions

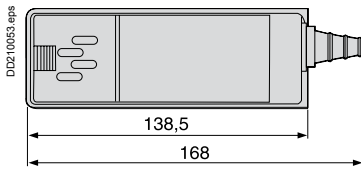

KBC16DC2●●, KBC16DC●2●6


16 A three-phase tap-off unit, with or without fuses

Catalogue numbers


3L + N + PE



Type of busbar trunking
All types possible



Polarity	3L + N
Scheme	
Protection	None
Weight (kg)	0.090
Cat. no.	KBC16DCB40



Cylindrical fuse NF 8.5 x 31.5
12 A gG maximum (not supplied)

0.090

KBC16DCF40

Canalis KBA and KBB


tap-off units, 25 and 40 A

For lighting and power socket distribution


16 A three-phase tap-off unit, with or without fuses

Catalogue numbers

3L + N + PE, with power socket



Type of busbar trunking





Polarity	3L + N	
Scheme		
Type of power socket	NF 2P + T 10/16 A, 250 V	VDE 2P + T 10/16 A, 250 V
Protection	Cylindrical fuse NF 8.5 x 31.5 16 A gG maximum (not supplied)	Cylindrical fuse NF 8.5 x 31.5 16 A gG maximum (not supplied)
Weight (kg)	0.090	0.090
Cat. no.	KBC16DCP1	KBC16DCP2


Dimensions



KBC 16DC●40

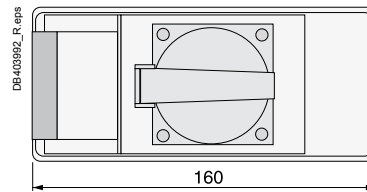



KBC16DCP●



For KDP description, see page 66. For KDP catalogue numbers and dimensions, see page 69.

Accessories for KBA and KBB tap-off units

Catalogue numbers



Designation	Bus connection device	Rear support bracket
Function	For 16 A single-phase or three-phase tap-off units to tap off the remote control circuit of the trunking to the remote receiver	For securing 16 A single-phase tap-off units to the trunking
Order in multiples of	10	10
Weight (kg)	0.010	0.020
Cat. no.	KBC16ZT1	KBC16ZC1

IP55

U_e = 230...400 V

RAL 9003 white

Canalis KBA, 25 and 40 A


Busbar trunking for lighting and power socket distribution

Assembly of trunking components




Check out the video showing the installation of Canalis in small and medium buildings


Assemble the straight lengths

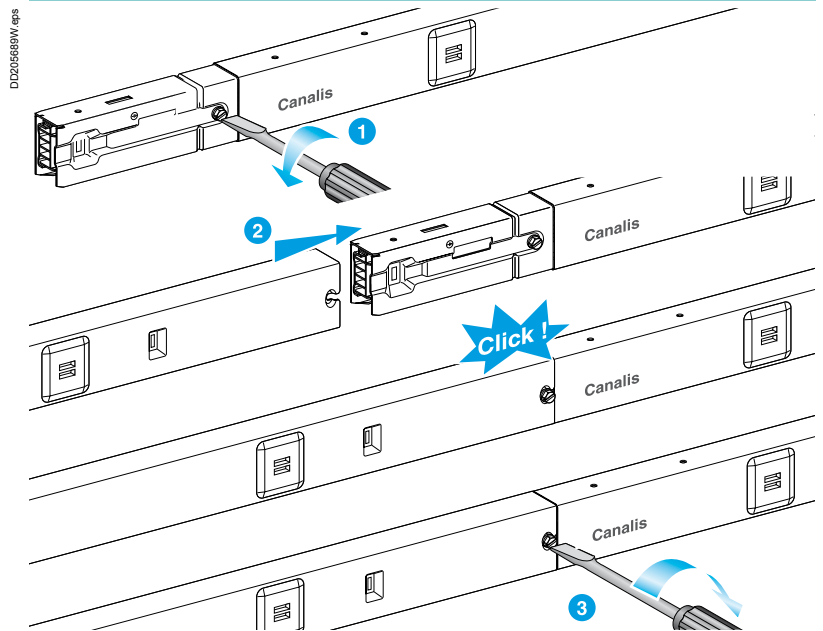

Connect the feed unit

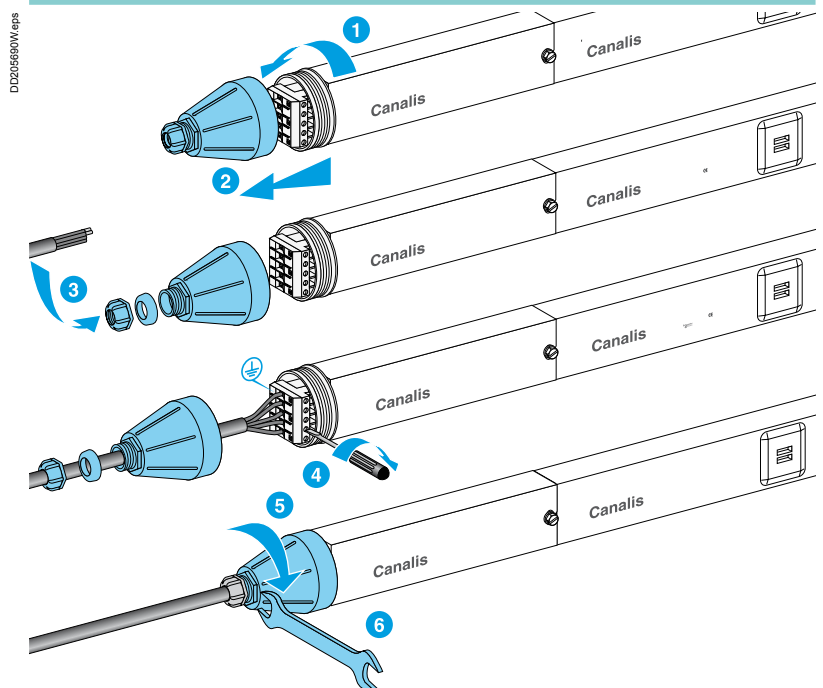

Assemble the end cover

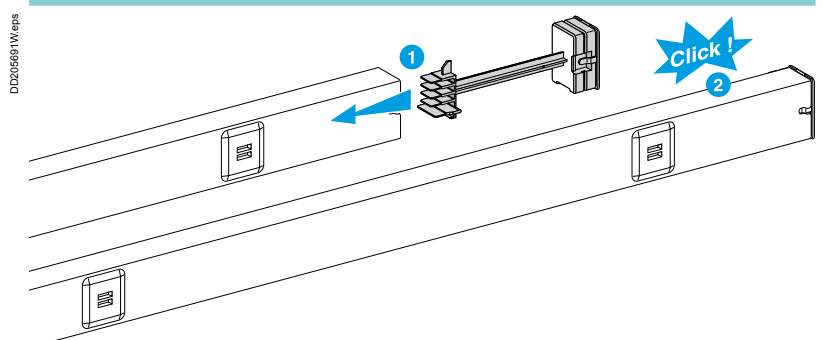

Canalis KBA, 25 and 40 A


Busbar trunking for lighting and power socket distribution

Assembly of trunking components




Check out the video showing the installation of Canalis in small and medium buildings


Fix Canalis KBA in the brackets

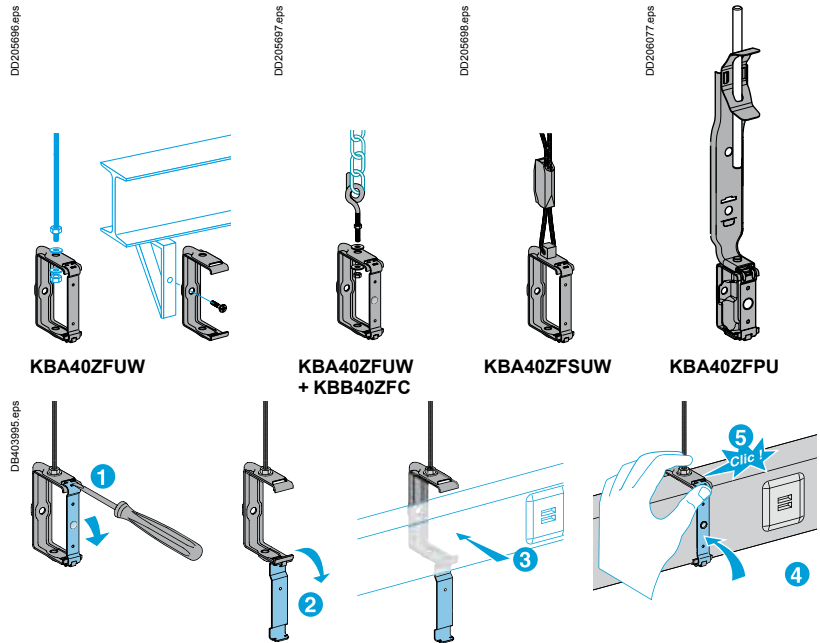

Mount the luminaires on the trunking

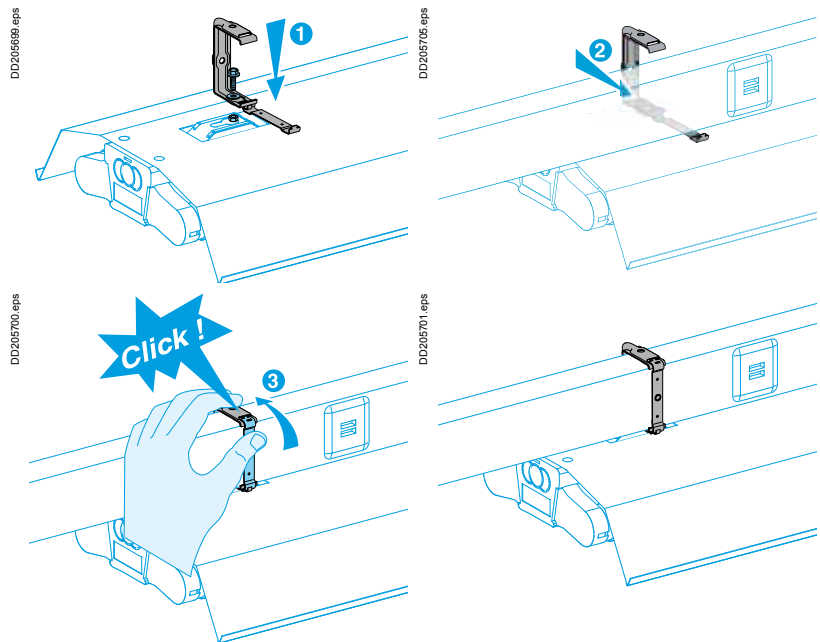

Connect the luminaires

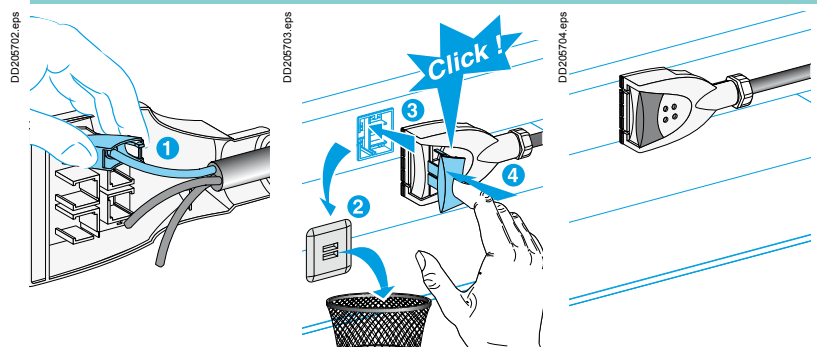

<i>Index</i>	3
<i>Introduction</i>	9
<i>Design guides and characteristics</i>	29
<i>Canalis KDP</i>	57
<i>Canalis KBA</i>	79

Presentation

Canalis KBB	100
For lighting and power socket distribution	100

Description

Canalis KBB	104
Busbar trunking for lighting and power socket distribution	104
Canalis KDP, KBA and KBB	108
Busbar trunking for lighting and power socket distribution	108
Tap-off units	108

Catalogue numbers - Dimensions


Canalis KBB, 1 circuit	110
Busbar trunking for lighting and power socket distribution	110
Optional remote-control circuit (code T) - Optional isolated earth (code E)	110
Canalis KBB, 2 circuits	111
Busbar trunking for lighting and power socket distribution	111
Optional remote-control circuit (code T) - Optional isolated earth (code E)	111
Canalis KBB	112
Busbar trunking for lighting and power socket distribution	112
Optional remote-control circuit (code T) - Optional isolated earth (code E)	112
Canalis KBA and KBB tap-off units	114
For lighting and power socket distribution	114

<i>Canalis KN</i>	121
<i>Canalis KS</i>	153
<i>Canalis KS riser</i>	205
<i>Canalis KT</i>	225
<i>Technical specifications</i>	231
<i>Maintenance</i>	239
<i>Recommendations for special applications</i>	243
<i>Catalogue numbers</i>	273
<i>Canalis worldwide</i>	279

Canalis KBB

For lighting and power socket distribution
25 and 40 A

PD020273R.eps

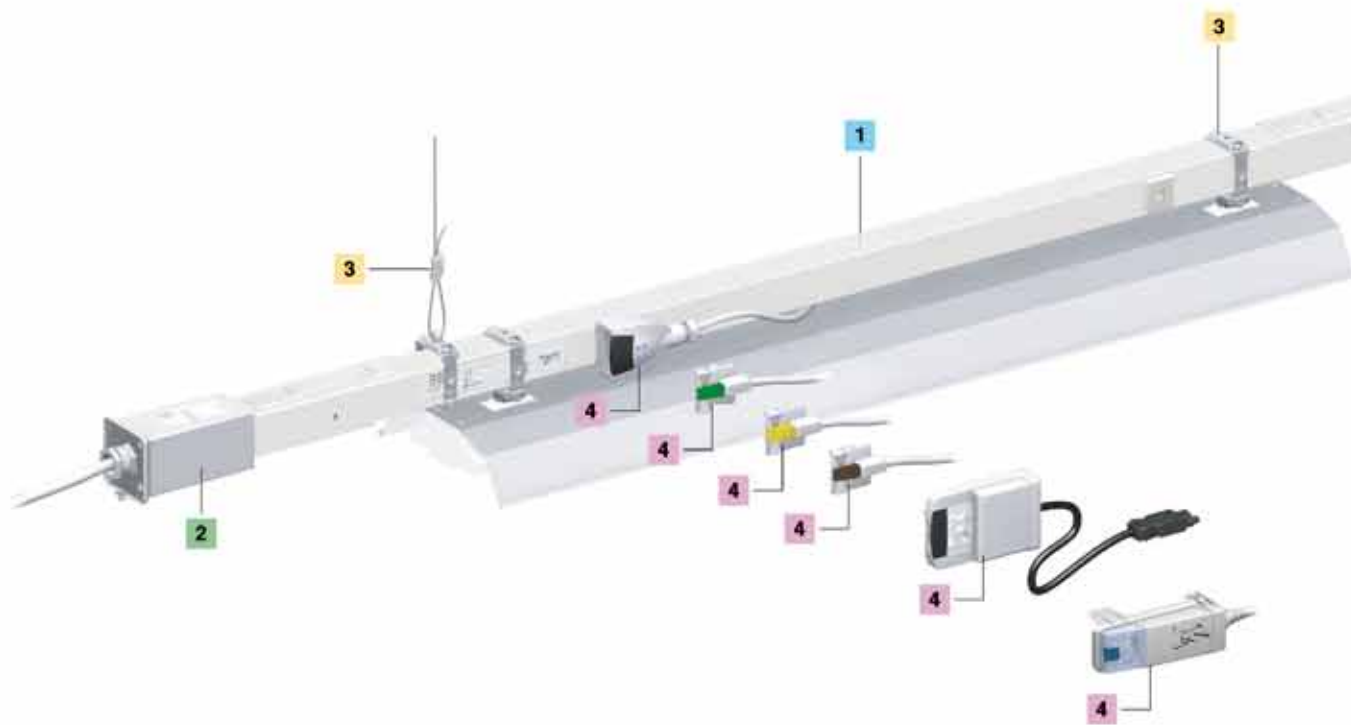

1. Run components

- Rating: 25 or 40 A.
- 2 or 4 live conductors.
- Length:
 - basic lengths: 2 and 3 metres.

PD020270R.eps



2. Feed units and end covers

- The feed units delivered with end covers, receive the cables supplying one end of Canalis KBB trunking.

PD020271R.eps





3. Fixing system and cable trays

- The fixing system ensures that Canalis KBB is well secured, whatever the type of building structure. There are also fixings to secure the luminaires to Canalis KBB.
- A metal duct is available for running other circuits such as emergency lighting, low-current circuits, etc.

PD020172.eps



4. Tap-off units

- The 10 and 16 A tap-off units, pre-wired or not, single-phase with fixed polarity or multi-phase with phase selection, can be used on the entire lighting range.

PD020439.eps



Canalis KBB

For lighting and power socket distribution
25 and 40 A



No toxic emission in case of fire

All components in the KBB range are **halogen free**.
In case of fire, Canalis KBB does not release smoke
or toxic gases.

DD202141_r_eps



P 0202174RV_eps




A large number of conductors

Canalis KBB offers up to 11 conductors
for all applications:


- emergency lighting,
- dimmers,
- detection of presence,
- lighting and power-socket circuits, etc.

DB403887_eps

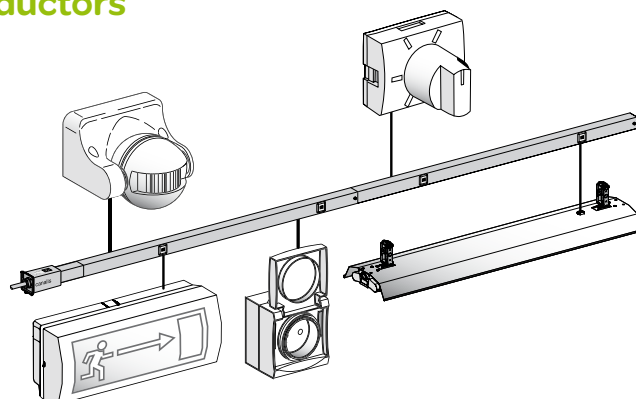

Very rigid

Canalis KBB offers fixing distances of up to 5 metres, including the jointing units.

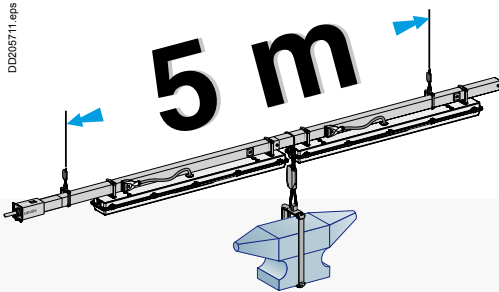


A high degree of protection

- **IP55** guarantees trunking protection against splashes and dust.
- Canalis KBB complies with **sprinkler tests**, guaranteeing operation under vertically and horizontally sprayed water for 50 minutes. The high degree of protection for Canalis KBB means it can be installed in all types of buildings.



Unmatched upgrading possibilities

It is particularly simple to add or modify a Canalis KBB installation since components can be easily mounted or dismantled. All parts can be reused.

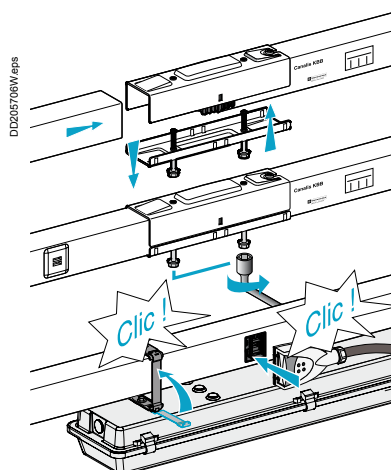

Description

IP55

U_e = 230...400 V

RAL 9003 white


Canalis KBB

Busbar trunking for lighting and power socket distribution 25 and 40 A

Run components

Carry current, support and supply the luminaires. Particularly strong, Canalis KBB is specially intended for installations with large fixing distances and/or heavy or numerous luminaires.

Straight lengths

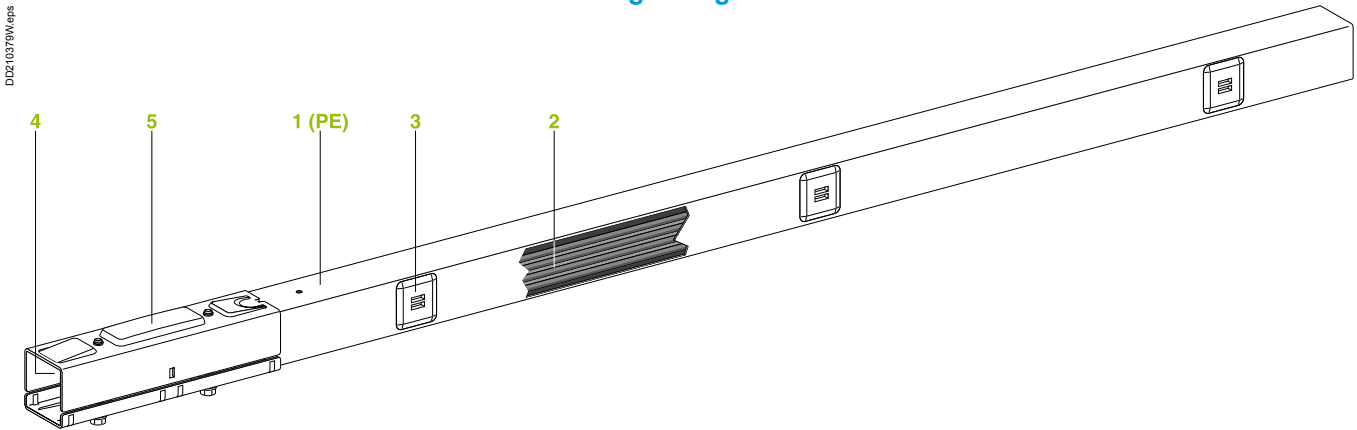


Straight lengths constitute the basic structure of the line and are made up of:

- 1 an all-in-one carrier casing, crimp closed, forming a rigid beam made of sheet steel, in RAL 9003 white lacquered sheet steel, hot galvanised on both sides. This casing also acts as the protective earth conductor (PE),
- 2 one or two ribbon cable with two or four copper conductors, making up one or two independent circuits,
- 3 three tap-off outlets maxi spaced every metre on the main circuit (front), two tap-off outlets maxi on the adjacent circuit (rear),
- 4 an electrical joint unit ensuring automatic and simultaneous connection of all live conductors,
- 5 a mechanical joint device in two parts, made of stamped sheet steel, that makes the connection of two lengths rigid and resistant to bending.

Multi-circuit possibilities

The many possibilities offered by KBB trunking means specialised circuits can be created, e.g. for emergency lighting, presence detection, dimming.

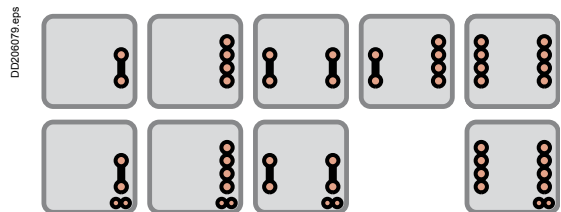

The degree of protection is IP55 (without accessories).

The busbar trunking is non-flame-propagating as per the recommendations of standard IEC 60332-3. All the insulating and plastic materials are **halogen-free** and have enhanced fire-withstand capabilities (incandescent wire test as per standard IEC 60695-2).

- 960 °C for components in contact with live parts.
- 650 °C for other components.



Feed units and end covers

Supply a Canalis KBB line.
They clip on (jointing unit) to the end of the line.

The end cover for the opposite end of the line is supplied with each feed unit.

- 1 Feed unit, one circuit
- 2 Feed unit, two circuits
- 3 End cover.

Supply from left

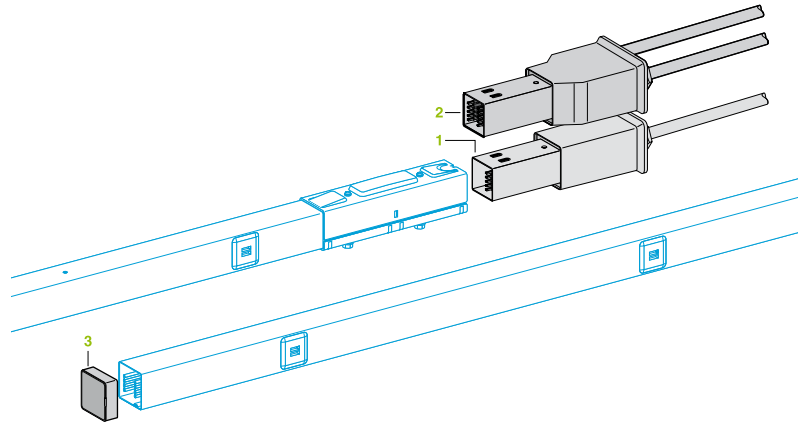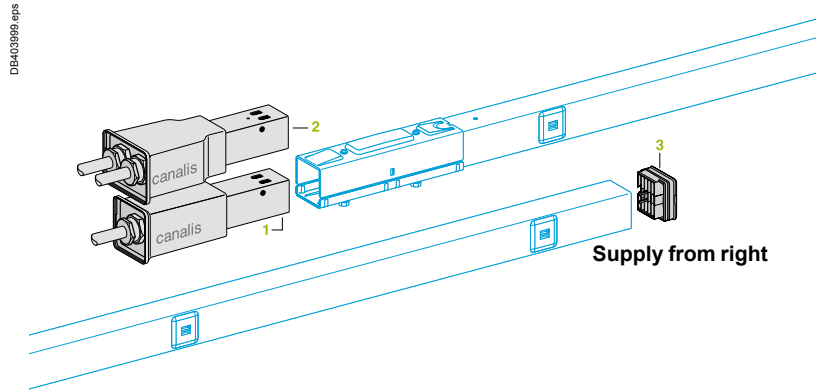


Flexible lengths

Flexible length

For changes in direction or levels and detours around obstacles.

It is mounted in the same way as a straight length.

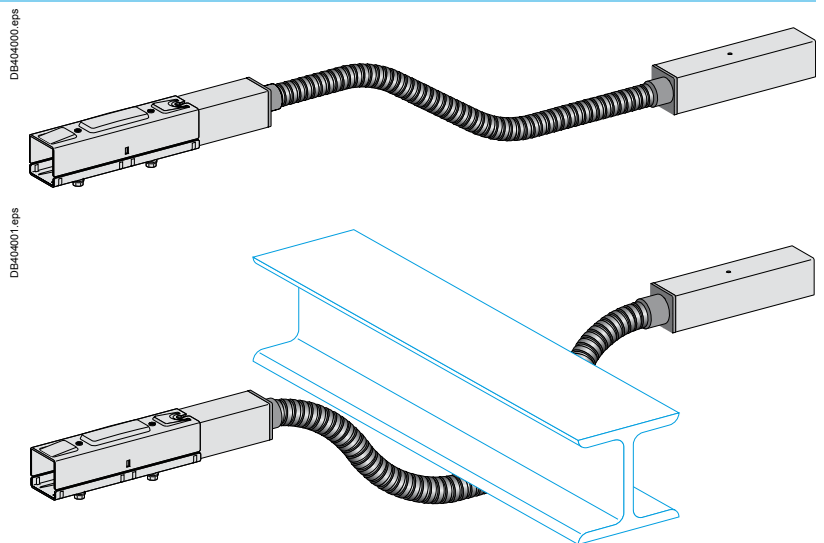

Description

IP55

U_e = 230...400 V

RAL 9003 white

Canalis KBB

Busbar trunking for lighting and power socket distribution 25 and 40 A

Fixing systems

Busbar trunking

For attachment of the busbar trunking to the structure of the building, either directly or via a threaded rod, chain or steel cable.

- Designed to relieve the installer of the weight of the busbar trunking once placed in a bracket.
- Automatic locking of moving part on closing (unlocking requires a 3 mm flat screwdriver).
- The maximum recommended fixing distance is five metres.

1 Universal fixing bracket

For suspension on a threaded rod, diameter 6 mm.
For horizontal mounting on a beam, pendant, wall, etc.

2 Cable suspension system

Cuts the mounting time of the fixing system to one-third of that required for threaded rods.
Enables adjustment of the height of the trunking.

3 Adjustable threaded-rod suspension system

For suspension on a threaded rod, diameter 6 mm.
A spring system locks the threaded rod in position for fast adjustment of the trunking.


4 Pigtail hook

For suspension by a chain.

Luminaires

Attached to the luminaires before mounting, these fixings ensure fast and direct fixing to Canalis KBB.

- Fixing systems with automatic locking of moving part on closing.
- To be completed according to the luminaire with suspension accessories (open hook, closed ring...).

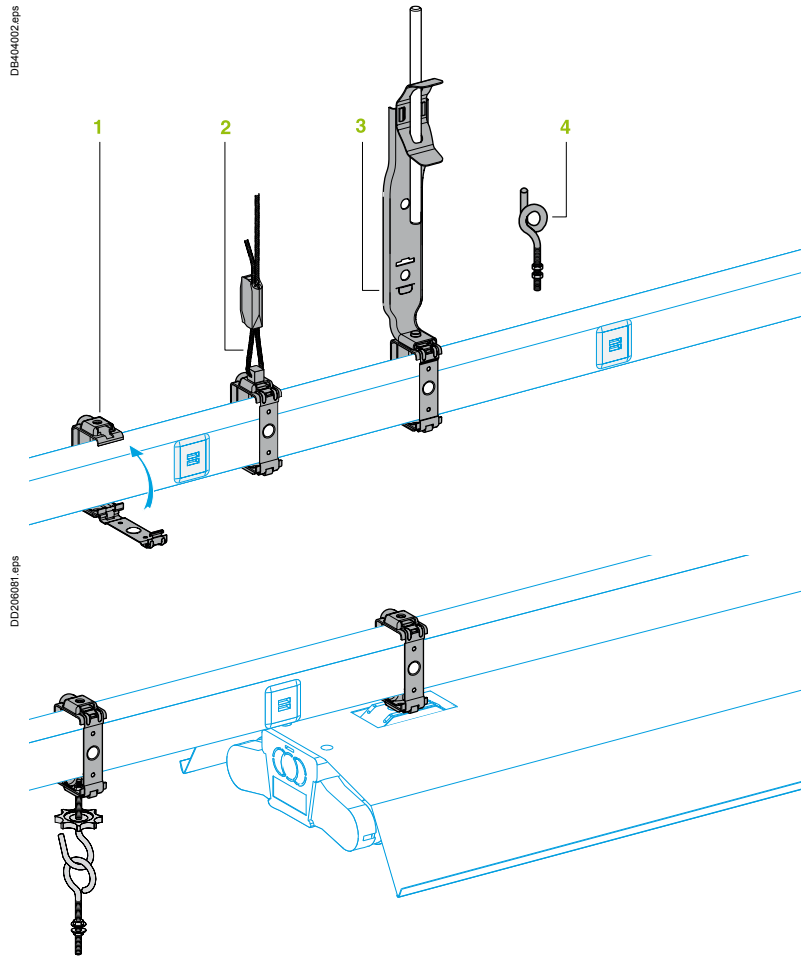


Cable support

For running adjacent circuits such as emergency lighting, low-current circuits, etc.

Cable brackets

Clips to trunking for fast mounting. It is possible to run three cables (diameter 5 to 16 mm) and two IRL tubes.

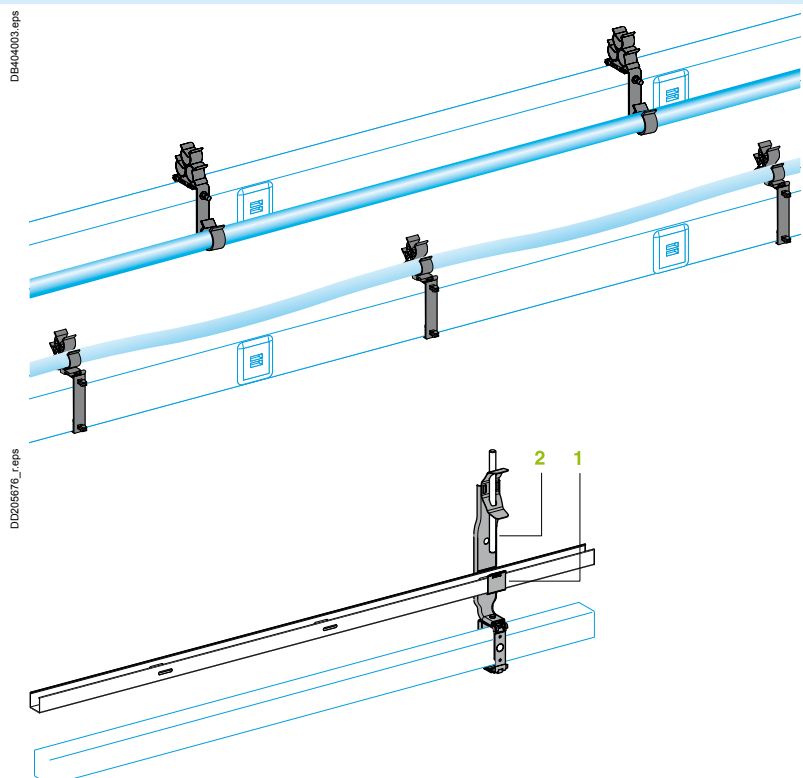

Cable duct


The cable duct fits on support (1), which in turn fits onto a threaded rod suspension system (2). An intermediate support is placed between the duct and the trunking if the distance between the suspension points exceeds 2 metres.

Each duct is equipped with a mechanical joint system.

Options

Empty lengths (no electric circuit)


Used to adjust line length to building dimensions (e.g. to reach a fixing point).
Two metres long, can be cut on site.

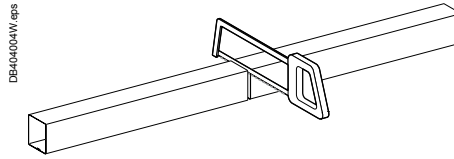

Clean earth option (Code E)

As an option, a factory-fitted dedicated earth conductor isolated from the grounding is available. This is known as a Clean Earth and has a cross-section of 6 mm².

- 1 The clean earth is always provided on the main circuit of KBB busbar trunking, on the front panel (side with label and 3 tap-offs on KBB with 2 circuits). The ⚡ symbol, which appears at regular intervals near to the tap-off outlets, serves as a reminder of the special nature of this circuit.
- 2 The electrical jointing unit is supplied with additional clean earth contacts. Thus, installation of components fitted with option E does not require any additional assembly operation.
- 3 The receivers are connected using a standard 16 A (KBC16DCB●● or DCF●●).
- 4 The feed boxes are fitted with clean earth (labelled ⚡) et PE (labelled ⊕) terminals.

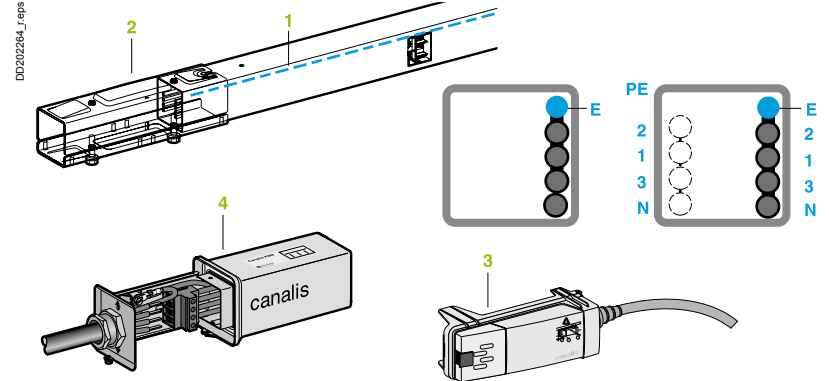


Optional remote-control circuit (code T)

Factory mounted, an SELV remote-control circuit (U 50 V) is available for the loads supplied by the KBB trunking. The main applications are:

- remote control (rest mode or testing) of self-contained emergency lighting units,
- dimmer control,
- transmission on a building automation bus (please contact us).

The system is built in compliance with European standard EN 61439-6 and the LV and EMC directives.

- 1 The remote-control circuit (twisted pair 1-10 V) is factory mounted next to the main circuit in the trunking (in front for two-circuit trunking).
- 2 Electrical jointing unit equipped with additional bus contacts. Installation of components fitted with option T requires no additional assembly operations.
- 3 Each tap-off outlet is equipped with output contacts to tap-off the remote-control circuit to the receiver.
- 4 Connection of the remote-control receiver using a KBC-16DCB or DCF tap-off unit equipped with a KBC16ZT1 contact-block accessory.
- 5 Feed units equipped with an additional bus terminal block.

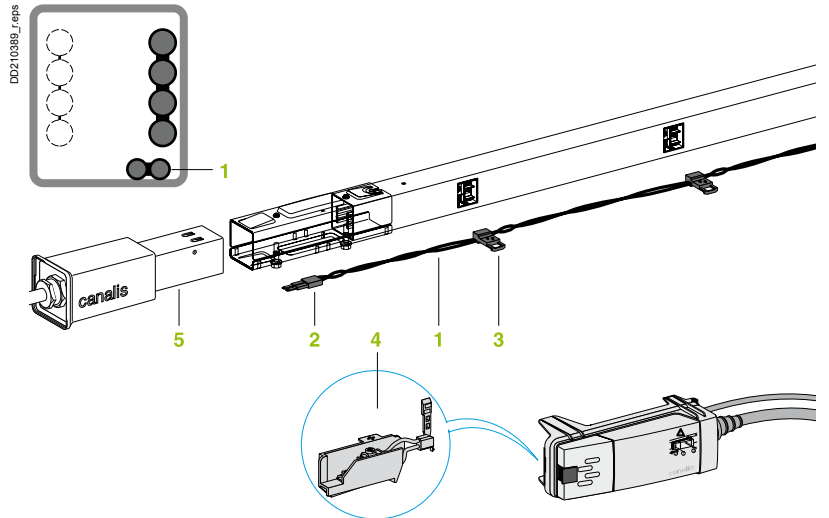

Possibility to use KBA/KBB with T option to transport and distribute DALI protocol for lighting management.
DALI stands for Digital Addressable Lighting Interface and is a protocol set out in the technical standard IEC 62386.



www.dali-ag.org

Description

IP55


U_e = 230...400 V

Canalis KDP, KBA and KBB

Busbar trunking for lighting and

power socket distribution

Tap-off units

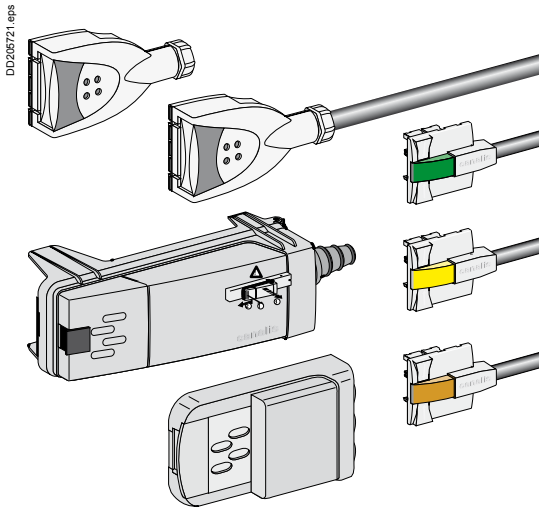


Tap-off units (general)

For instantaneous connection of luminaires to KDP busbar trunking:

- they can be handled while energised and under live conditions
- the contacts for live conductors are of the clamp type
- PE connection occurs before that of the phases and neutral
- phase-selection system (clip-in contact studs) for balancing of 3-phase distribution systems
- selection is visible via a transparent window
- a coloured lock holds them in the tap-off outlet
- all the insulating and plastic materials have a high fire-retardant capacity:
 - incandescent-wire test in compliance with IEC 60695-2-1:
 - 960 °C for components in contact with live parts,
 - 650 °C for other components.

All the insulators and plastic components are **halogen free**.

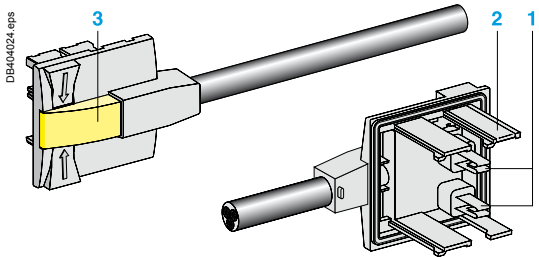

Pre-wired 10 A tap-off unit with fixed polarity

Pre-wired with SO5Z1Z1-F 3 x 1.5 mm² cable, 0.80 m long, pre-stripped on luminaire end:

- 10 A rating
- fixed L + N + PE polarity
- the various models make it possible to balance 3-phase distribution systems.

The colour of the lock and the casing enable remote identification of the polarity.

- 1 Live-conductor contacts.
- 2 Protective-conductor contact.
- 3 Lock.

Two-pole 10 A tap-off unit with phase selection

- The two contact studs are movable and can be used to set up both L + N + PE and 2L + PE distribution.
- Supplied complete with a cable gland.

10 A KBC-10DCB20 tap-off unit, 2-pole + PE, to be wired


- To be wired for connection of luminaires using a cable of specific type, size or length.
- Fast connection for 3 x 0.75 to 1.5 mm² cable. If prefabricated leads are used, the line must have 16 A protection (see possibilities of dispensing with protection in the simplified design guide for lighting distribution, in the section on protection against overloads).

10 A KBC tap-off unit, 2-pole + PE, pre-wired


Two pre-wired versions are available:

- 1 pre-wired with SO5Z1Z1-F 3 x 1.5 mm² cable, 1 m long, pre-stripped on luminaire end,
- 2 for KDP, pre-wired with SO5Z1Z1-F 3 x 1.5 mm² cable, 1 m long and equipped with a female GST18i3 connector on the luminaire end (see prefabricated leads). In this case, the lead is IP40.

If prefabricated leads are used, the line must have 16 A protection (see possibilities of dispensing with protection in the simplified design guide for lighting distribution, in the section on protection against overloads).

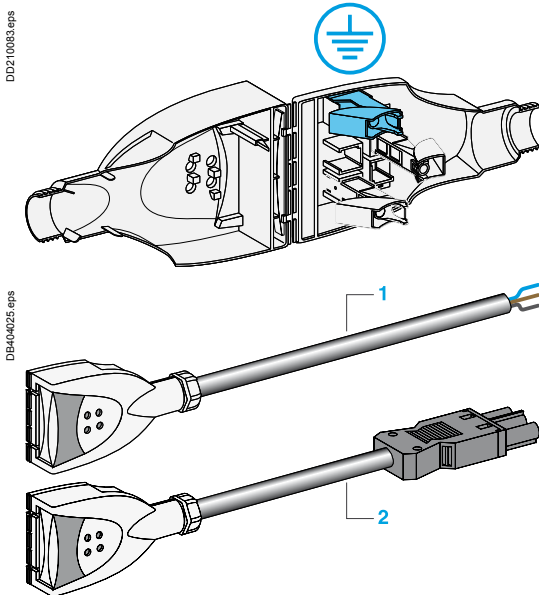

DB404026.eps



16 A KBC16DCB/DCF21 tap-off unit with phase selection

For connection of luminaires using a cable of specific type, size and length.

- Two-pole: L + N + PE (1 mobile stud, fixed neutral) or 2L + PE (2 mobile studs).
- Installation is facilitated by the side guides.
- Supplied with a cable bushing. Terminal connections for 0.75 to 1.5 mm² cable.

KBC16DCB tap-off unit with terminals, direct connection (no protection)

For direct connection (no protection) of luminaires using a specific cable. Can be equipped with the accessory to tap-off the remote-control circuit to the luminaires.


KBC16DCF tap-off unit, with fuses

For protection of each luminaire.

Fuse carrier on the phase (1 or 2 carriers depending on the model).

For cylindrical fuse NF 8.5 x 31.5 (not supplied), 16 A gG maximum, breaking capacity 20 kA.

DB404027.eps




16 A L + N + PE tap-off unit with preselected polarity KBC16DCB/DCF●6

For tap-off and individual protection of luminaires assigned to two independent circuits of 4-conductor KBB trunking.

Identical in design to the tap-off units on the opposite page, but with factory-set polarity.

DD205725.eps



Accessories

Specific to KBC16DCF tap-off units


1 Additional remote-control contact block

- For tap-off of the remote-control circuit to the luminaire (KBA and KBB lines with T option).
- Clips onto KBC16DCB or CF (except KBC16DCF22) tap-off units.
- Terminals for data cable, max. size 2 x 0.75 mm².
- Supplied with cable bushing.

2 Rear support bracket

Additional fixing of KBC16 tap-off units using the rear support bracket may be necessary, notably if there is a risk of accidental pulling on the cable or if the cable is very heavy (great length).

DD205726.eps



Other accessories


3 Interlocking device

For all 10 A and 16 A tap-off units.

A set of three interlocking devices in different colours can be used to mechanically lock out tap-off units when two or three different distribution networks are present (load, voltage, frequency, etc.).

- An interlocking device is made up of a handle and an interlocking device on each end. It can be used for a tap-off outlet and the corresponding tap-off unit.
- Labels can be placed on the tap-off units and the trunking for remote identification.

DD210192.eps

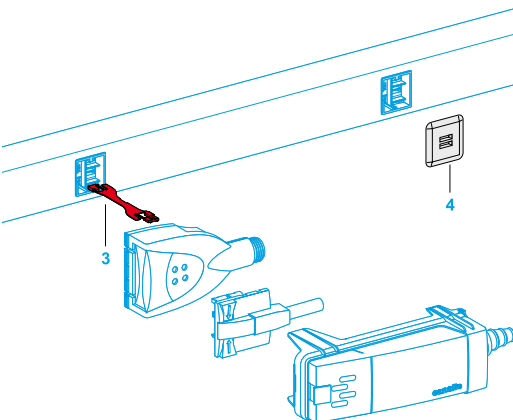

4 Outlet blanking plate

Spare part intended to restore IP55 on a tap-off outlet following removal of the tap-off unit (if original blanking plate is lost).

Catalogue numbers

Dimensions

IP55

U_e = 230...400 V

RAL 9003 white

Canalis KBB, 1 circuit, 25 and 40 A

Busbar trunking for lighting and

power socket distribution



Optional remote-control circuit (code T)

Optional isolated earth (code E)

Straight lengths, one circuit


Catalogue numbers

DB44023W.eps

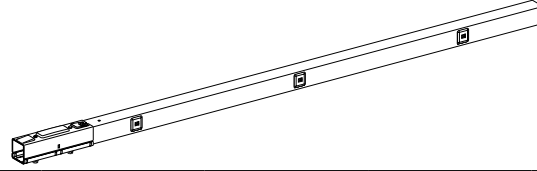

Type of busbar trunking	Standard straight length L + N + PE			Standard straight length 3L + N + PE			Empty length
Length (m)	3	2	2	3	2	2	2
Number of tap-offs	0	3	2	0	3	2	0
Order in multiples of	6	6	6	6	6	6	6
Option ⁽¹⁾	T	-	■	-	■	■	-
	E	-	■	-	■	■	-
Weight (kg)	2.400	2.400	1.700	2.600	2.600	1.900	1.600
25 A rating Cat. no.	KBB25ED2300W	KBB25ED2303W	KBB40ED2202W	KBB25ED4300W	KBB25ED4303W	KBB40ED4202W	KBB40EDA20W
Weight (kg)	2.700	2.700	1.700	3.100	3.100	1.900	1.600
40 A rating Cat. no.	KBB40ED2300W	KBB40ED2303W	KBB40ED2202W	KBB40ED4300W	KBB40ED4303W	KBB40ED4202W	KBB40EDA20W

Dimensions




KBB●●ED●●●3W

KBB●●ED●●●2W

Feed units (supplied with end cover)

Catalogue numbers

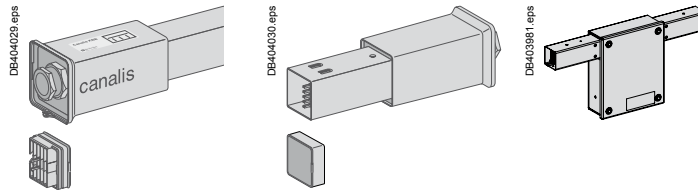


Designation	Feed unit			Additional jointing unit
Mounting	Left	Right	Central	-
Cable connection	Terminals (mm ²)	10	10	10
	Cable gland Ø maxi (mm)	PG 21, Ø19	PG 21, Ø19	PG 21, Ø19
Option ⁽¹⁾	T	■	■	■
	E	■	■	■
Weight (kg)	0.400	0.500	0.400	0.640
Cat. no.	KBB40ABG4W	KBB40ABD4W	KBB40ABT4W	KBB40ZJ4W ⁽²⁾

(1) ■ Option T may be combined. Add T at the catalogue number. Example: **KBB40ABG4TW**.

■ Option E may not be combined with options T. Add E to the cat. no. Example: **KBB40ABG4EW**.

(2) For T or E options, take ref. **KBB40ZJ44TW** or **KBB40ZJ44EW**.

Dimensions

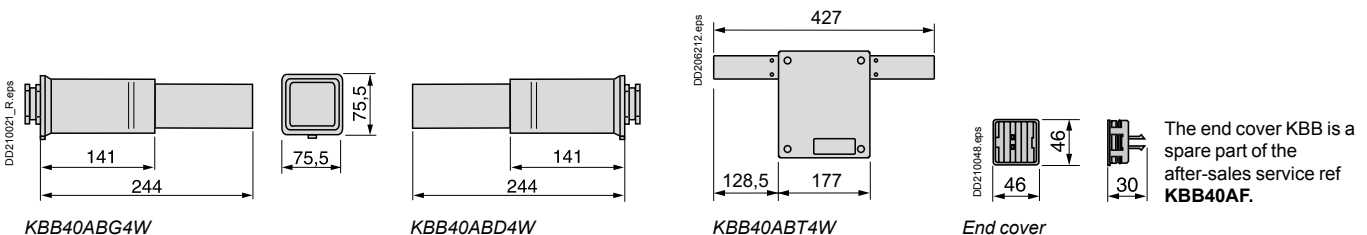



Canalis KBB, 2 circuits, 25 and 40 A

Busbar trunking for lighting and power socket distribution
Optional remote-control circuit (code T)
Optional isolated earth (code E)


Straight lengths, two circuits

Catalogue numbers

DB4025W.eps


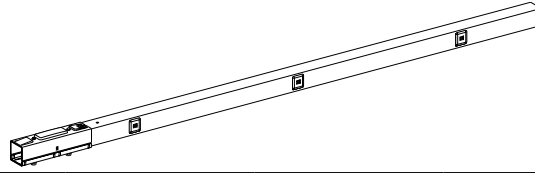


Type of busbar trunking	Standard straight length					
Length (m)	3	2	3	2	3	2
Number of tap-offs	0	3 + 2	2 + 1	0	3 + 2	2 + 1
Order in multiples of	6	6	6	6	6	6
Option ⁽¹⁾	T -	■	■	-	■	■
E -	-	■	■	-	■	■
Weight (kg)	4.600	4.600	3.600	4.700	4.700	3.800
25 A rating Cat. no.	KBB25ED22300W	KBB25ED22305W	KBB40ED22203W	KBB25ED42300W	KBB25ED42305W	KBB40ED42203W
Weight (kg)	5.200	5.200	3.600	5.700	5.700	3.800
40 A rating Cat. no.	KBB40ED22300W	KBB40ED22305W	KBB40ED22203W	KBB40ED42300W	KBB40ED42305W	KBB40ED42203W





Type of busbar trunking	Standard straight length					Empty length
Length (m)	3	2	3	2	3	2
Number of tap-offs	0	3 + 2	2 + 1	3 + 2	0	0
Order in multiples of	6	6	6	6	6	6
Option ⁽¹⁾	T -	■	■	■	-	-
E -	-	■	■	■	-	-
Weight (kg)	4.800	4.800	3.800	-	1.600	1.600
25 A rating Cat. no.	KBB25ED44300W	KBB25ED44305W	KBB40ED44203W	-	KBB40EDA20W	KBB40EDA20W
Weight (kg)	6.100	6.100	3.800	6.100	1.600	1.600
40 A rating Cat. no.	KBB40ED44300W	KBB40ED44305W ⁽³⁾	KBB40ED44203W	KBB40ED44305T2W	KBB40EDA20W	KBB40EDA20W

Dimensions






KBB25ED30W



KBB40ED203W

Feed units (supplied with end cover)


Catalogue numbers




Designation	Feed unit			Additional jointing unit		
Mounting	Left	Right	Central			
Cable connection	Terminals (mm ²) 6 to 10	6 to 10	6 to 10			
Cable gland	PG 21, Ø19	PG 21, Ø19	PG 21, Ø19			
Options	All	All	E	T	T	-
Option ⁽¹⁾⁽²⁾	T ■	■	-	□	-	■
E ■	■	■	□	-	-	■
Weight (kg)	0.400	0.400	0.500	0.500	0.500	0.640
Cat. no.	KBB40ABG44W	KBB40ABG44T2W	KBB40ABD44EW	KBB40ABD44TW ⁽³⁾	KBB40ABT44W	KBB40ZJ44W

(1) Option T may be combined. Add T at the catalogue number. Example: KBB40ABG4TW. Option E may not be combined with option T. Example: KBB40ABG4EW.
(2) Cat. no. for which the option is automatically included.
(3) Cat. no. can be ordered with 2 remote-control circuits. Example: KBB40ABD44T2W

Dimensions



KBB4044W



End cover

The end cover KBB is a spare part of the after-sales service ref KBB40AF

Catalogue numbers

Dimensions

IP55

U_e = 230...400 V

RAL 9003 white

Canalis KBB, 25 and 40 A

Busbar trunking for lighting and


power socket distribution

Optional remote-control circuit (code T)

Optional isolated earth (code E)

Flexible lengths

Catalogue numbers

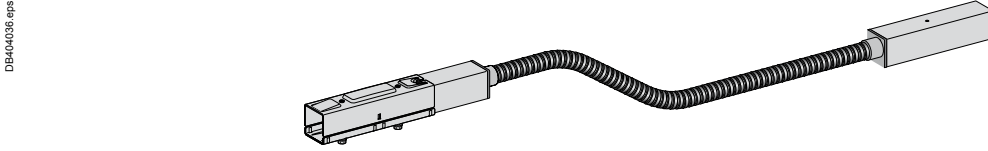


Mounting	For elbows, changing levels, detours around obstacles, etc.			
For trunking				
Length (m)	0.5	2	0.5	2
Option (1)	T ■ E ■	■	■	■
Weight (kg)	0.800	1.900	0.800	1.900
Cat. no.	KBB40DF405W	KBB40DF420W	KBB40DF4405W (2)	KBB40DF4420W (2)

(1) ■ Option T may be combined. Add T at the catalogue number. Example: **KBB40AA4TW**.

■ Option E may not be combined with options T. Example: **KBB40AA4WE**.

(2) Equipped with double bus option.

Dimensions

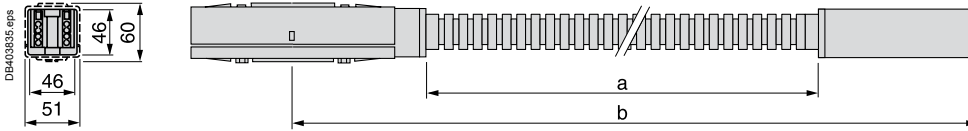

Length (mm)	a	b
KBB40DF4●●5W	153	500
KBB40DF4●●0W	1653	2000

Fixing systems

Catalogue numbers


Busbar-trunking fixings



Designation	Universal fixing bracket	Cable suspension system		Spring fixing bracket (1)	Pigtail hook	Raiser	
Mounting	Suspended on threaded rod or lateral (except wall)	Universal fixing bracket with steel cable	Universal fixing bracket for steel cable	Cable alone, 3 m long	Adjustable suspension for threaded rod, Ø M6	For suspension by a chain	For mounting on wall or false floor
Maximum load (kg)	60	60	60	60	50	60	60
Order in multiples of	10	10	10	10	10	10	10
Weight (kg)	0.050	0.105	0.035	0.070	0.160	0.020	0.040
Cat. no.	KBB40ZFUW	KBB40ZFSUW	KBB40ZFSLW	KBB40ZFS23	KBB40ZFPU	KBB40ZFC	KBB40ZFMP

(1) Maximum recommended distance between fixings: 5 meters.


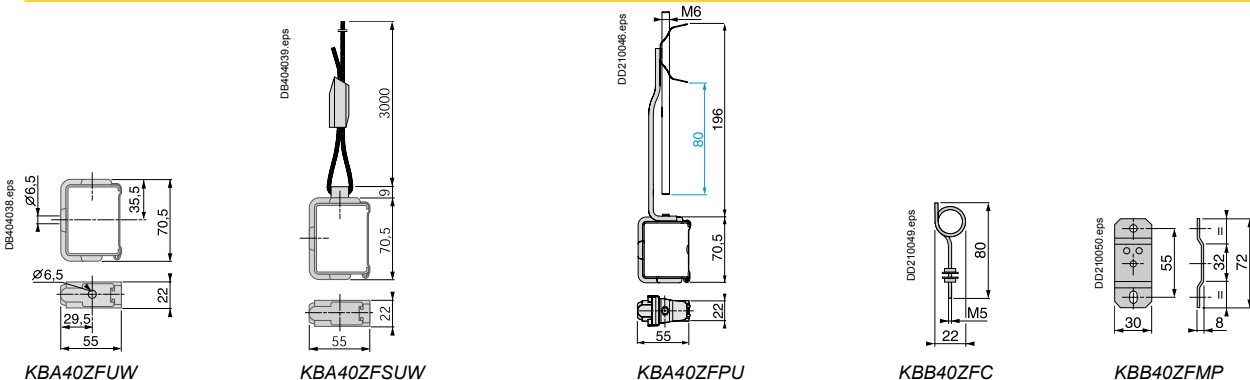


Dimensions




Fixing systems (cont.)

Catalogue numbers

Luminaire fixings

				
Designation	Fixing bracket	Universal fixing bracket	Open hook	Ring
Mounting	For direct suspension of luminaires on KBB	For direct suspension under trunking	To suspend the luminaire	Mounted on the luminaire
Maximum load (kg)	45	60	45	45
Order in multiples of	12	10	10	10
Weight (kg)	0.055	0.050	0.050	0.050
Cat. no.	KBB40ZF	KBB40ZFUW	KBB40ZFC5	KBB40ZFC6





Dimensions

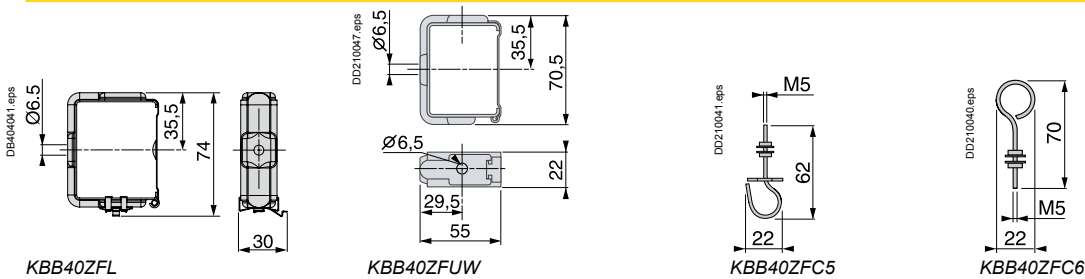

Accessories

Catalogue numbers





Cable duct, support

				
Designation	Cable duct	Cable duct support to be mounted on a spring fixing bracket ⁽¹⁾	Cable duct support + intermediate support ⁽²⁾	Cable brackets
Function	Width 25 mm, length 3 m	Cable duct support to be mounted on a spring fixing bracket ⁽¹⁾	Cable duct support + intermediate support ⁽²⁾	For adjacent circuits
Order in multiples of	6	10	10	20
Weight (kg)	1.115	0.100	0.200	0.005
Cat. no.	KFB25CD253	KBB40ZFG1	KBA40ZFG2	KBB40ZFGU


(1) Maximum recommended distance between fixings: 2 meters.

(2) Maximum recommended distance between fixings: 3 meters.

Other accessories

				
Designation	Outlet/tap-off unit interlocking device (2 parts)			Blanking plate
Function	Identification and mechanical interlocking between 1 to 3 different circuits			Restore IP55 on tap-off outlet if original blanking plate is lost
Colour	Bleu	Blanc	Rouge	-
Order in multiples of	20	20	20	10
Weight (kg)	0.002	0.002	0.002	0.005
Cat. no.	KBC16ZL10	KBC16ZL20	KBC16ZL30	KBC16ZB1
				KBB40ZFS

Dimensions

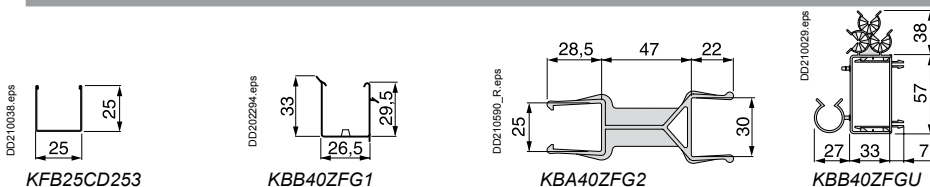


Canalis KBA and KBB tap-off units, 25 and 40 A For lighting and power socket distribution

10 A tap-off unit, direct connection

Catalogue numbers

L + N + PE, with fixed polarity, pre-wired SO5Z1Z1-F 3 x 1.5 mm², 0.8 m long





Type of busbar trunking

Single-circuit switching
Balancing on 3 phases or 3-circuit switching

Polarity	L1 + N	L2 + N	L3 + N
Colour of lock	Green	Yellow	Brown
Order in multiples of	10	10	10
Cable length (mm)	800	800	800
Weight (kg)	0.100	0.100	0.100
Cat. no.	KBC10DCS101	KBC10DCS201	KBC10DCS301

L + L + PE or L + N + PE, with phase selection





Type of busbar trunking

All types possible

Polarity	L1 + N or L2 + N or L3 + N L1 + L2 or L1 + L3 or L2 + L3 L2 + N2 or L3 + N3
Order in multiples of	10
Weight (kg)	0.065
Cat. no.	KBC10DCB20

L + L + PE or L + N + PE, with phase selection, pre-wired SO5Z1Z1-F 3 x 1.5 mm², 1 m long




Type of busbar trunking

All types possible

Polarity	L1 + N or L2 + N or L3 + N L1 + L2 or L1 + L3 or L2 + L3 L2 + N2 or L3 + N3
Pre-equipped with female GST18i3 connector	No Yes ⁽¹⁾
Order in multiples of	10
Weight (kg)	0.165
Cat. no.	KBC10DCC211 KBC10DCC21Z

3L + N + PE




Type of busbar trunking


All types possible

Polarity	To be defined for each application (dimmer, emergency lighting, etc.)
Order in multiples of	10
Weight (kg)	0.065
Cat. no.	KBC10DCB40

Dimensions



KBC10DCS●01

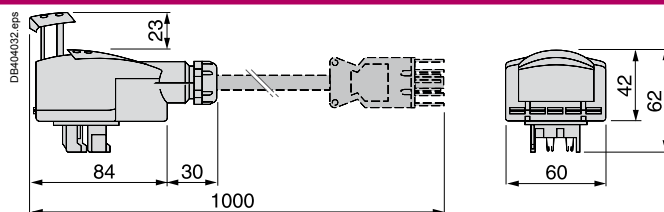

KBC10DCB20, KBC10DCC21●, KBC10DCB40

(1) For IP, see KBA and KBB tap-off units description page 108.

16 A single-phase tap-off unit, with or without fuses


Catalogue numbers

L + N + PE + BUS (D+/D-)



Type of busbar trunking

Single-circuit switching Balancing on 3 phases or 3-circuit switching




Polarity	L + N + PE (D+/D-)	L + N + PE (D+/D-)	L + N + PE (D+/D-)
Colour of lock	Green	Yellow	Brown
Order in multiples of	10	10	10
Cable length (mm)	1000	1000	1000
Cat. no.	KBC16DCS101T	KBC16DCS201T	KBC16DCS301T

L + N + PE + BUS (D+/D-)



Type of busbar trunking


Single-circuit switching Balancing on 3 phases or 3-circuit switching



Polarity	L + N + PE (D+/D-)	L + N + PE (D+/D-)	L + N + PE (D+/D-)
Colour of lock	Green	Yellow	Brown
Order in multiples of	5	5	5
Cable length (mm)	2000	2000	2000
Cat. no.	KBC16DCS102T	KBC16DCS202T	KBC16DCS302T


Catalogue numbers

L + N + PE, with phase selection



Type of busbar trunking

Single-circuit switching Balancing on 3 phases or 3-circuit switching



Polarity	L1 + N or L2 + N or L3 + N	
Scheme	<p>DD210151.eps DD210153.eps</p>	
Protection	None	Cylindrical fuse NF 8.5 x 31.5 16 A gG maximum (not supplied)
Colour of lock	Blue	Blue
Order in multiples of	10	10
Weight (kg)	0.090	0.090
Cat. no.	KBC16DCB21	KBC16DCF21

Catalogue numbers

Dimensions

IP55


Ue = 230...400 V

Canalis KBA and KBB tap-off units, 25 and 40 A For lighting and power socket distribution


16 A single-phase tap-off unit, with or without fuses

Catalogue numbers

L + L + PE, with phase selection



Type of busbar trunking
Balancing on
3 phases without neutral




Polarity	L1 + L2 or L1 + L3 or L2 + L3	
Scheme		
Protection	None	Cylindrical fuse NF 8.5 x 31.5 16 A gG maximum (not supplied)
Colour of lock	Yellow	Yellow
Order in multiples of	10	10
Weight (kg)	0.090	0.090
Cat. no.	KBC16DCB22	KBC16DCF22

L + N + PE, with preselected polarity





Pour canalisation
2 circuits monophasés



Polarity	L2 + N2		L3 + N3	
Scheme				
Protection	None	Cylindrical fuse NF 8.5 x 31.5 16 A gG maximum (not supplied)	None	Cylindrical fuse NF 8.5 x 31.5 16 A gG maximum (not supplied)
Colour of lock	Blue	Blue	Blue	Blue
Order in multiples of	10	10	10	10
Weight (kg)	0.090	0.090	0.090	0.090
Cat. no.	KBC16DCB226	KBC16DCF226	KBC16DCB216	KBC16DCF216

Dimensions

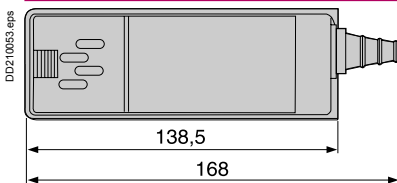


KBC16DC●2●, KBC16DC●2●6


16 A three-phase tap-off unit, with or without fuses

Catalogue numbers

3L + N + PE



Type of busbar trunking
All types possible




Polarity	3L + N	
Scheme		
Protection	None	Cylindrical fuse NF 8.5 x 31.5 12 A gG maximum (not supplied)
Weight (kg)	0.090	0.090
Cat. no.	KBC16DCB40	KBC16DCF40


16 A three-phase tap-off unit, with or without fuses

Catalogue numbers

3L + N + PE, with power socket




Type of busbar trunking





Polarity	3L + N	
Type of power socket	NF 2P + T 10/16 A, 250 V	VDE 2P + T 10/16 A, 250 V
Protection	Cylindrical fuse NF 8.5 x 31.5 16 A gG maximum (not supplied)	Cylindrical fuse NF 8.5 x 31.5 16 A gG maximum (not supplied)
Weight (kg)	0.090	0.090
Cat. no.	KBC16DCP1	KBC16DCP2


Dimensions

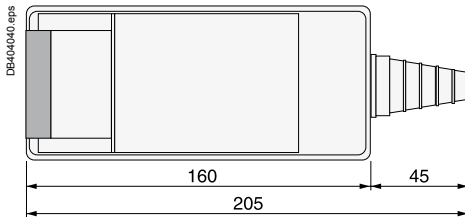

KBC16DC●40





KBC16DCP●



Accessories for KBA and KBB tap-off units

Catalogue numbers



Designation	Bus connection device	Rear support bracket
Function	For 16 A single-phase or three-phase tap-off units to tap off the remote control circuit of the trunking to the remote receiver	For securing 16 A single-phase tap-off units to the trunking
Order in multiples of	10	10
Weight (kg)	0.010	0.020
Cat. no.	KBC16ZT1	KBC16ZC1

Installation

IP55
Ue = 230...400 V
RAL 9003 white


Canalis KBB, 25 and 40 A

Busbar trunking for lighting and power socket distribution
Assembly of trunking components




Check out the video showing the installation of Canalis in an industrial environment


Assembling the straight lengths

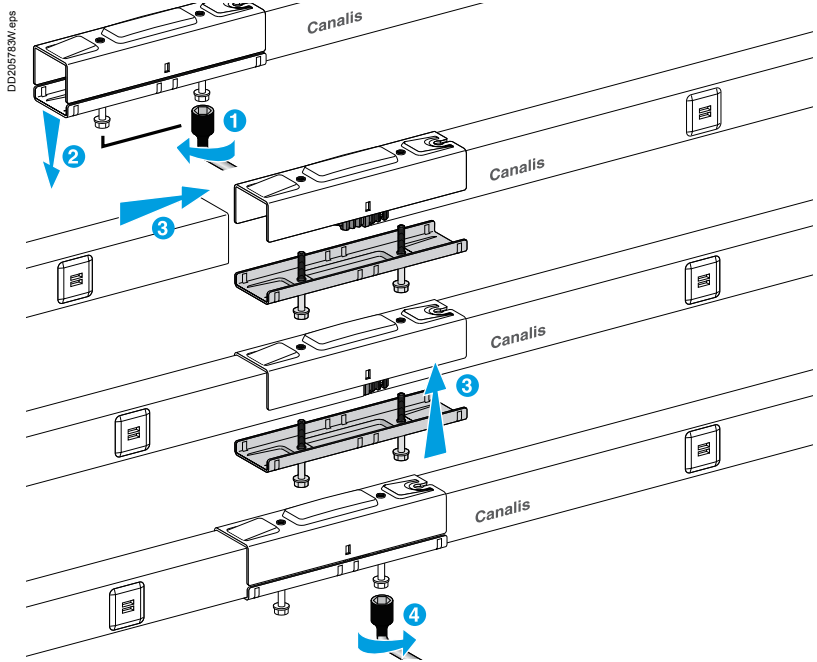

Connecting the feed-unit

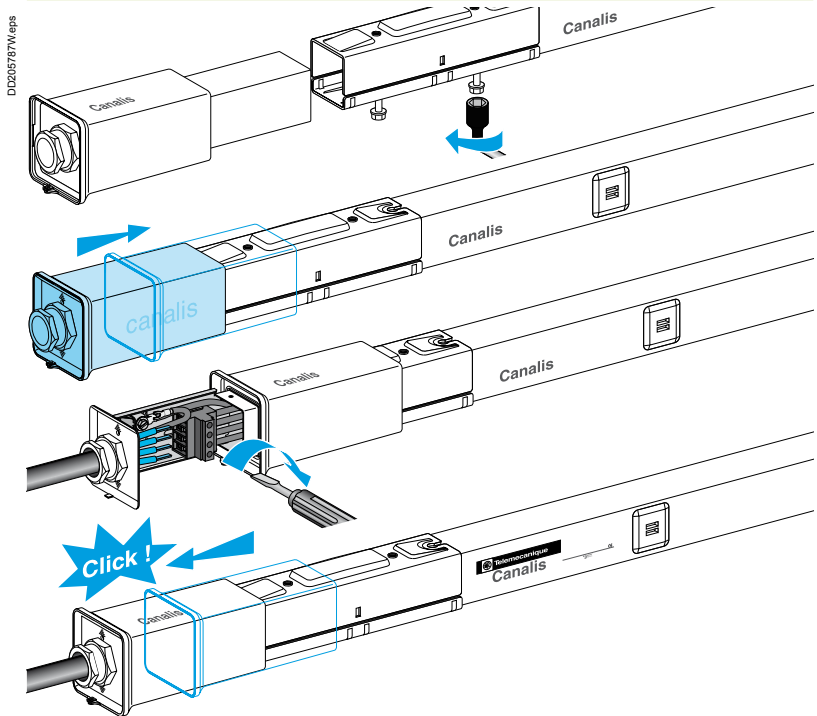


Assembling the end cover

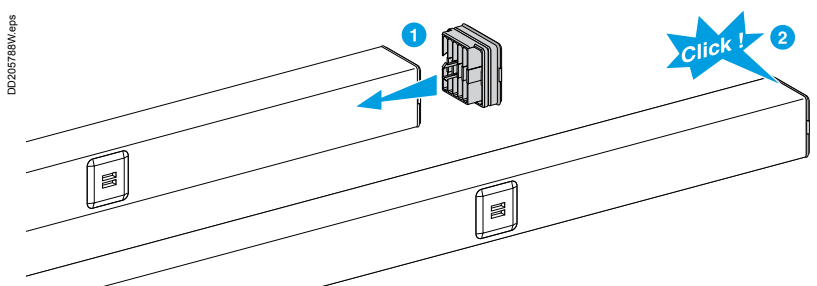




Check out the video showing the installation of Canalis in an industrial environment


Fixing Canalis KBB in the brackets

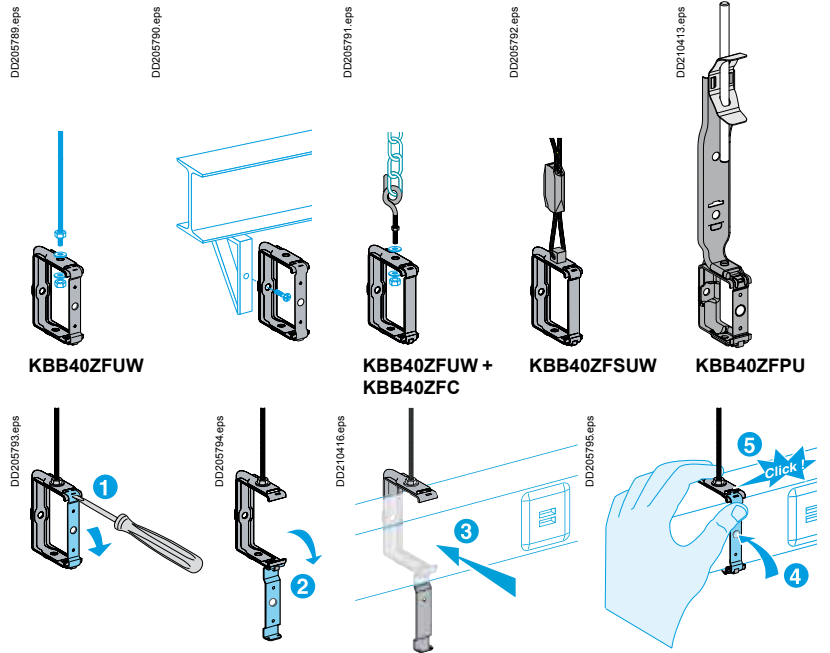

Mounting the luminaires on the trunking

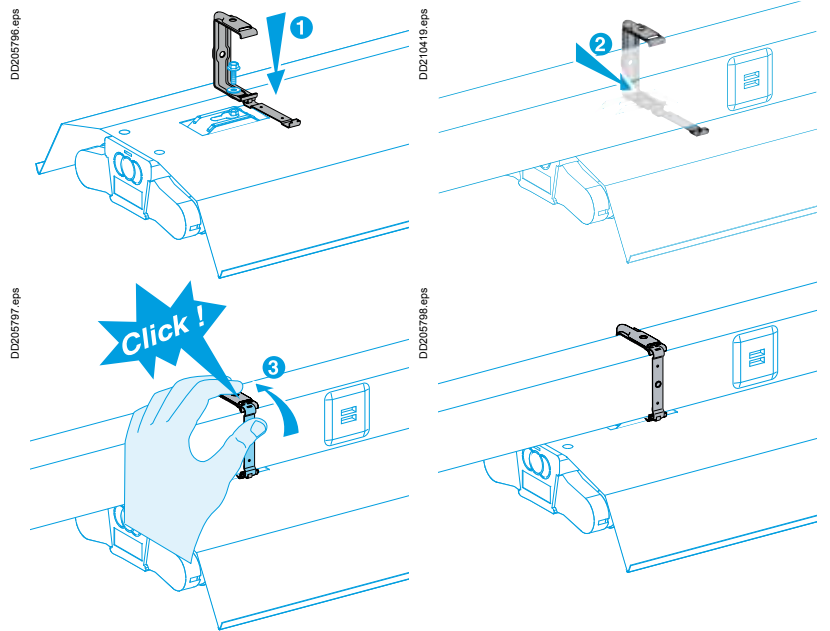

Connecting the luminaires

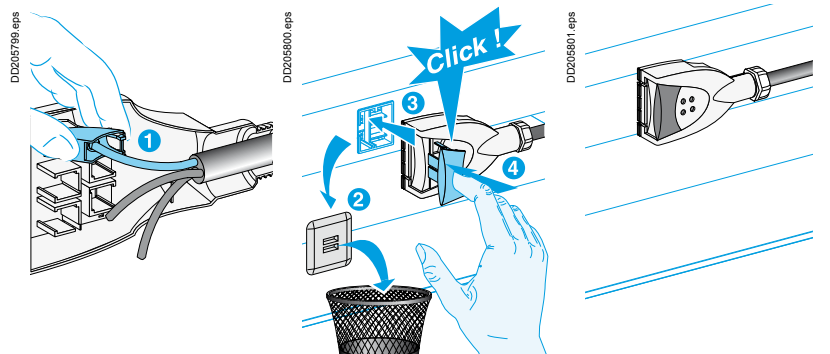

<i>Index</i>	3
<i>Introduction</i>	9
<i>Design guides and characteristics</i>	29
<i>Canalis KDP</i>	57
<i>Canalis KBA</i>	79
<i>Canalis KBB</i>	99

Presentation

Canalis KN	122
For low-power distribution from 40 to 160 A	122

Description

Canalis KN, 40 to 160 A	126
Low-power distribution	126

Catalogue numbers - Dimensions


Canalis KN, 40 to 160 A	132
Busbar trunking for low-power distribution	132
Complementary products	134
16 to 32 A tap-off units for modular devices	138
63 A tap-off units for modular devices	139
32 A tap-off unit, with power sockets protected by modular devices	140
32 A tap-off unit, for power sockets protected by modular devices	141
16 to 25 A tap-off units for NF fuses	142
50 A tap-off units for NF fuses	143
16 to 20 A tap-off units for BS fuses	144
32 A tap-off units for BS fuses	145
16 A tap-off units and 25 to 50 A tap-off units for DIN fuses	146
Tap-off units equipped with a surge arrester	147
Accessories	149

<i>Canalis KS</i>	153
<i>Canalis KS riser</i>	205
<i>Canalis KT</i>	225
<i>Technical specifications</i>	231
<i>Maintenance</i>	239
<i>Recommendations for special applications</i>	243
<i>Catalogue numbers</i>	273
<i>Canalis worldwide</i>	279

Canalis KN

For low-power distribution
from 40 to 160 A

PD020202_rv12.eps

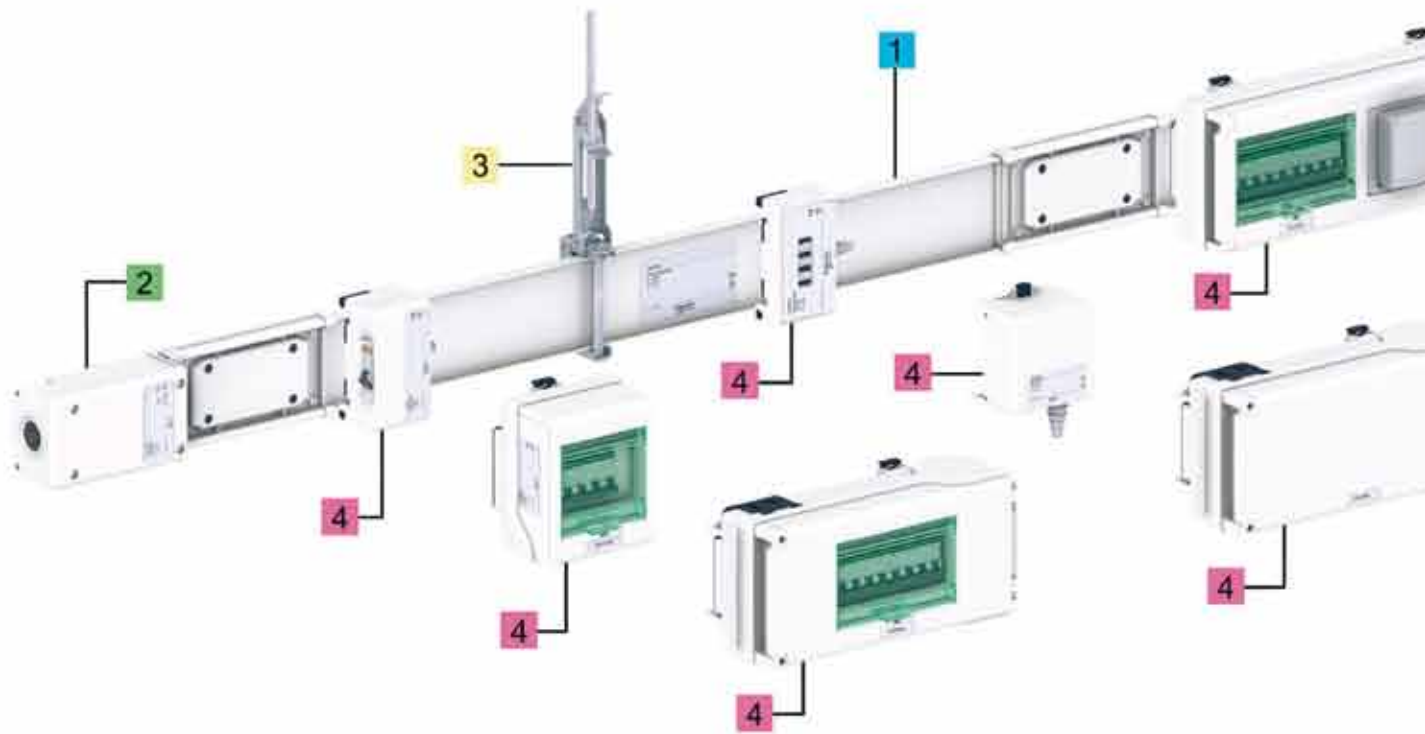

1. Run components

- Rating: 40, 63, 100 and 160 A.
- 4 live conductors.
- Length:
 - Basic components: 3 metres.
 - Additional lengths: 2 and 3 metres.

PD020198W/eps




2. Feed units and end covers

- The feed units delivered with end covers, receive the cables supplying one end or any other point of Canalis KN trunking.

PD020199_rv1eps



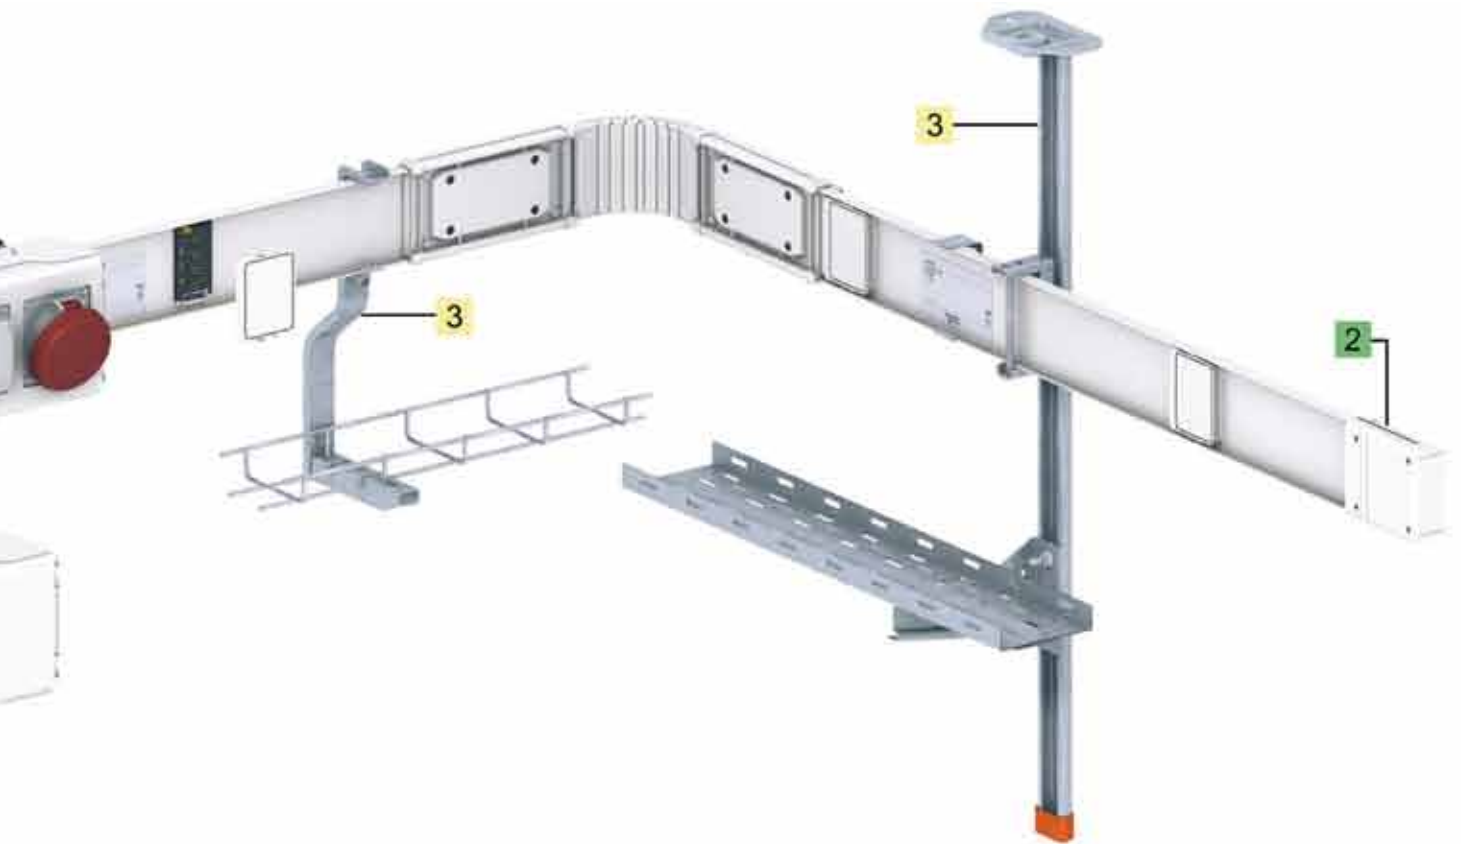

3. Fixing system

- The fixing system ensures that Canalis KN is well secured, whatever the type of building structure.



DB403867 eps

4. Tap-off units

- The tap-off units (with and without isolators) are used to:
 - supply loads from 16 to 63 A
 - or protect nearby loads against overloads due to lightning strikes
- Protection using modular circuit breakers or fuses.



PD20201_N eps

Canalis KN

For low-power distribution
from 40 to 160 A



No toxic emission in case of fire

All components in the KN range are **halogen free**.
In case of fire, Canalis KN releases very small quantities of smoke and no toxic gases.

DD202141_r_eps



Total safety

An interlocking device prevents mounting errors and makes it impossible to install or remove an energised tap-off unit.

DD202145_r_eps



PD202079_rW_eps



Excellent contact

Contacts are silver-plated. The level of performance remains the same throughout the life of the product.


P1010018W_eps



A complete range of tap-off units

- The range covers all needs from 16 to 63 A.
- Protection is possible using circuit breakers, fuses or SPD (Surge Protection Device).
- Also available are tap-off units equipped with household and industrial power sockets.

DD202172_eps

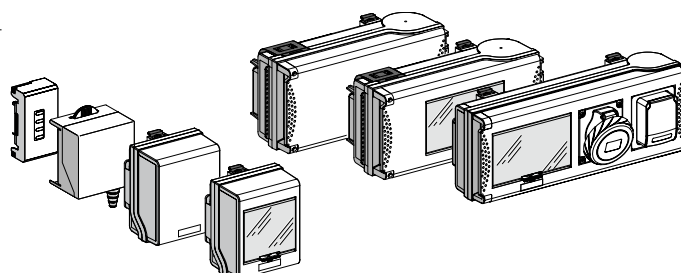

A high degree of protection

The high degree of protection for Canalis KN means it can be installed in all types of buildings.

- **IP55** guarantees trunking protection against splashes, dust.
- **IK08** guarantees the strength of the trunking (resistance to shocks).
- **IPxxD** ensures totally safe working conditions for maintenance personnel.
- Canalis KN complies with **sprinkler tests**, guaranteeing operation under vertically and horizontally sprayed water for 50 minutes.


DD202142_7.eps



DD202144_7.eps



DD202143_7.eps

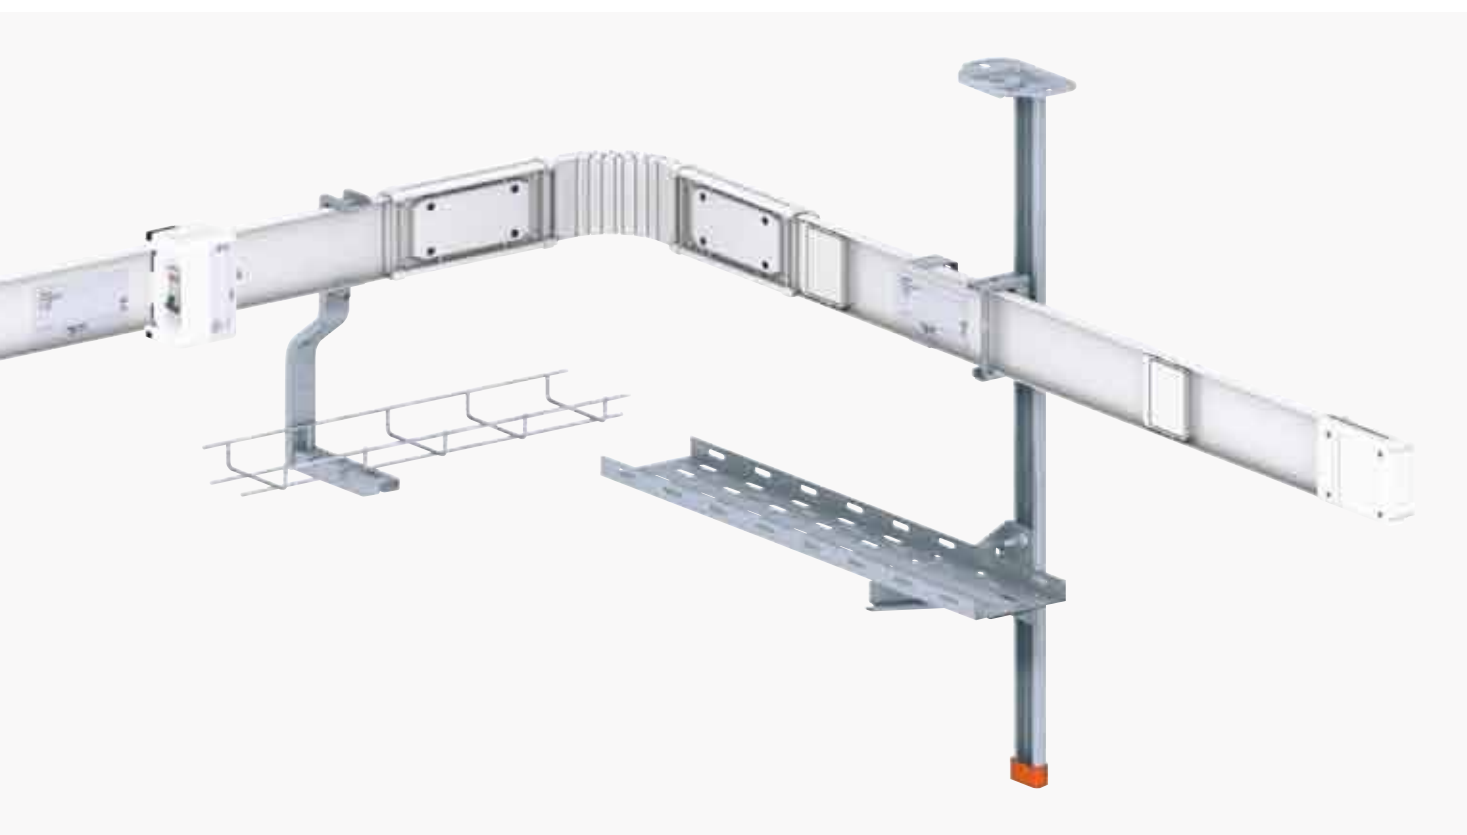


Unmatched upgrading possibilities


Tap-off outlets are positioned every 0.5 metres to ensure availability of an outgoer as close as possible to loads throughout the life of the installation.

Tap-off units can be added or removed on live installations, without interrupting the supply to the other loads.

DD205762V1W.eps



DD205761W1W.eps

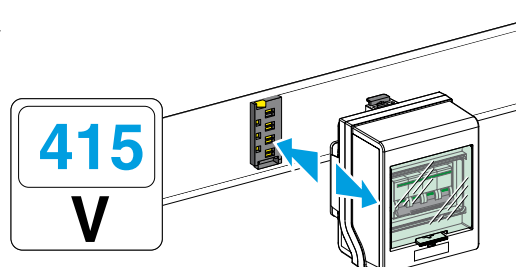

Description

IP55


U_e = 230...500 V

RAL 9001 white

Canalis KN, 40 to 160 A

Low-power distribution

DD270183.eps

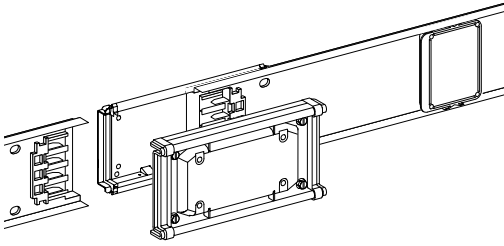

Canalis KN is designed for low-power distribution.

There are two versions:

■ Canalis KNA: busbar trunking with four live conductors (3L + N + PE), for distribution up to 160 A,

■ Canalis KNT: identical to KNA, but equipped with a transmission bus with three 2.5 mm² conductors (except 160 A).

This bus can be used to set up simple control/monitoring systems (lighting or other loads).

The degree of protection of KNA and KNT trunking is IP55.

All the insulating and plastic materials are **halogen-free** and have enhanced fire-withstand capabilities

■ incandescent wire test as per standard IEC 60695-2:

□ 960 °C for components in contact with live parts,

□ 650 °C for other components.


Straight lengths

Carry the current and supply low-power loads.

Straight lengths constitute the basic structure of the line and are made up of:

- 1 a **carrier casing**, crimp closed, made of hot-galvanised sheet steel, pre-lacquered RAL 9001 white. This rail also acts as the protective earth conductor (PE),
- 2 an **insulated mounting casing**, supporting the live conductors,
- 3 **four live aluminium conductors**, equipped with silver-plated aluminium/copper bimetal contacts at junctions and tap-off points,
- 4 **tap-off outlets** with automatic shutters that open and close automatically when tap-off units are installed or removed. They are equipped with blanking plugs to maintain the degree of protection IP55. There are one or two tap-offs per metre, depending on the version,
- 5 a **mechanical and electrical jointing system**. Electrical connection is via flexible grip contacts made of silver-plated copper. The system ensures automatic and simultaneous connection of all live conductors and the continuity of the protective earth conductor,
- 6 **three copper bus conductors** (Canalis KNT for the complementary offer).

DB403673.eps

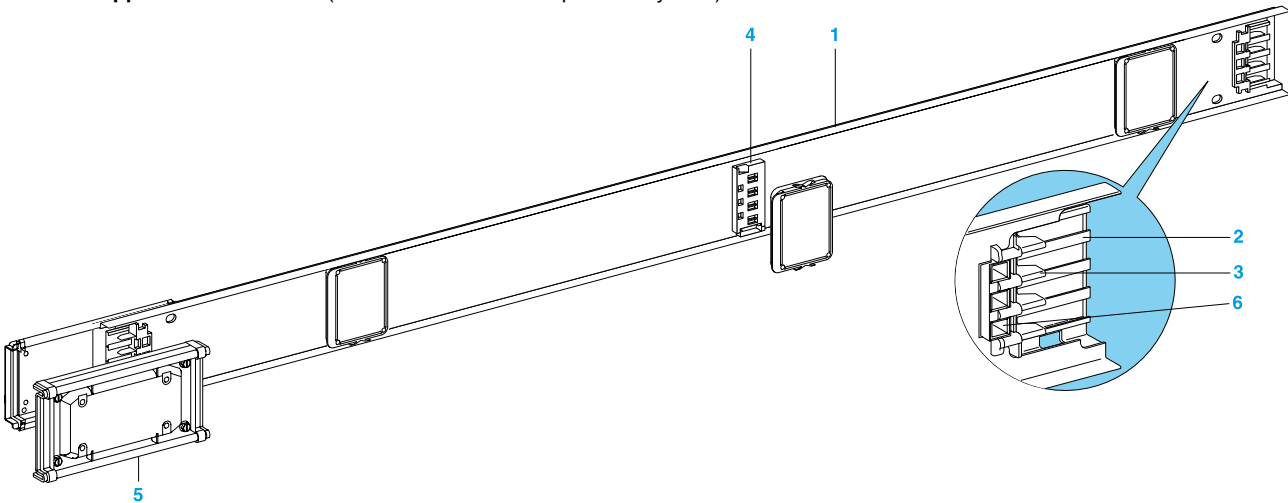

Feed units

Supply a Canalis KN line, via a cable.

They can be mounted at the end of a line (end feed) or in the middle (central feed).

These units are made of moulded plastic for the 40, 63 and 100 A ratings and metal for the 160 A rating.

They are equipped with:

■ terminals for 16 mm² copper cables on the 63 A feed units, copper contacts for 35 mm² lugs on the 100 A feed units and for 95 mm² lugs on the 160 A feed units

■ multi-diameter knock-outs until 100 A rating and cable-gland plates for the 160 A rating

■ a 3 x 2.5 mm² terminal block for connection of the remote-transmission cable (Canalis KNT).


1 End feed units

They are equipped with a mechanical and electrical locating system (polarisation), making it possible to supply a run from the right or the left. They are supplied with an end cover.

2 Central feed units

They are supplied with two end covers.

DD205623.eps

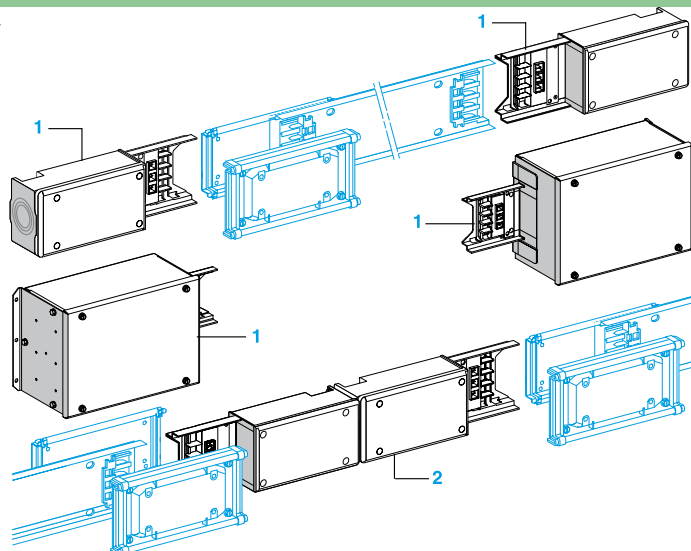

Components for changing direction

For changes in direction and detours around obstacles (posts, pipes). They can be shaped by hand, on site, to follow any path.


1 Flexible elbow

2 Flexible length

One metre long, these components can be used in corners to adjust to the lengths of the straight components running along three walls, regardless of the dimensions of the premises.

3 3D flexible length

Three metres long, it can be bent in any direction to avoid major obstacles, particularly useful in false ceilings.

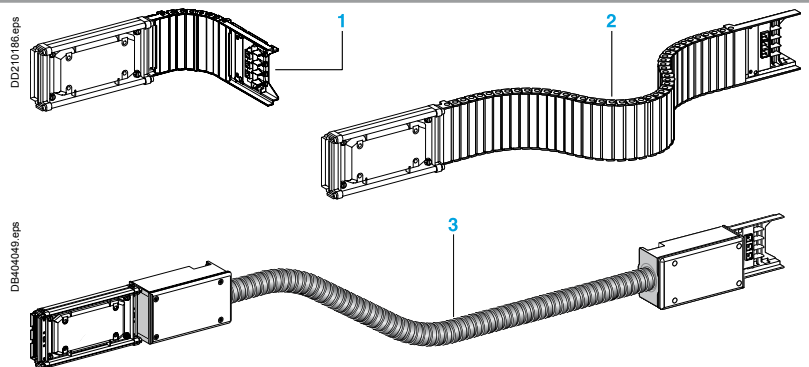

Fixing system and additional cable duct

Fixing system

For attachment of the busbar trunking to the structure of the building, either directly or via threaded rods (8 mm diameter), brackets, etc.

The fixings are suitable for all types of mounting: on ceilings, suspended, on walls, etc. Regarding fixing installation, some tap-off outlets would not be available.

1 Universal fixing bracket

For edgewise or flat trunking installation.

The recommended fixing distance is three metres for trunking installed edgewise and 1.5 metres when installed flat.

2 Wall brackets

For edgewise mounting only. The recommended fixing distance is two metres.

3 Spring fixing bracket

These brackets are used to suspend the KN line on threaded rods M8 and do not require tools. The bracket is attached to the threaded rod by the spring mechanism, without nuts or bolts. Adjustment of the length of the threaded rod is simplified and the KN trunking can be installed three times faster.

They are suitable for all ratings.

4 Pendant Kit

The pendant kit includes:

- a perforated pendant (length: 1 meter, width: 80 mm) used to suspend a KN line from the building structure, an IPN or the ceiling.



- a cantilever arm that supports the cable tray under the KN line.

- the mounting hardware required to secure the KN bracket and the cantilever arm to the pendant. If necessary, additional cantilever arms can be ordered.

5 Fixing bracket for tracking

Designed for fast mounting, it supports the 100 mm cable trays made of perforated sheet-metal or wire mesh.

Can be directly installed on Canalis trunking: no additional fixing points required.

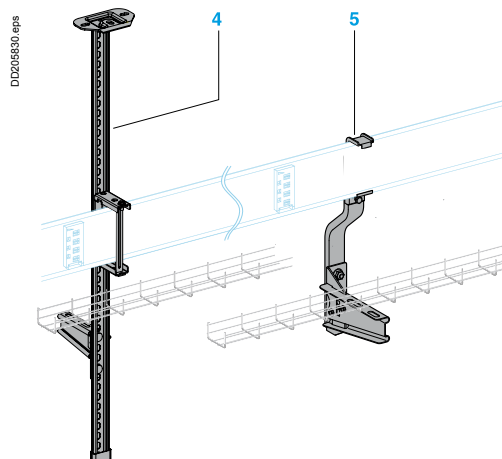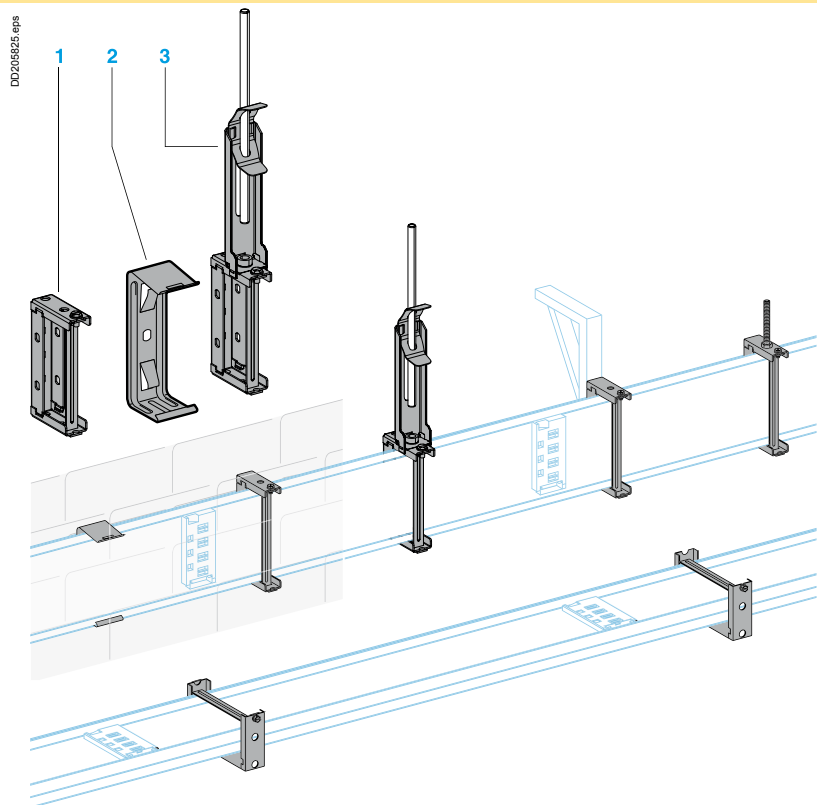

Description

IP55

U_e = 230...500 V

RAL 9001 white

Canalis KN, 40 to 160 A

Low-power distribution

Tap-off units (not equipped)

For rapid connection of loads or secondary lines (e.g. lighting), in compliance with installation standards CEI 60364 and regulations concerning TT, IT and TNS systems.

They can be handled under off-load conditions with the trunking energised.

All contacts are made of silver-plated copper.

Tap-off units with disconnection by unplugging

Disconnection by unplugging the tap-off unit.

Access to the electrical equipment and the terminals is possible only when the tap-off unit is unplugged (i.e. not energised).

A safety device prevents connection to the trunking when the cover has been removed.


Tap-off units with isolators

Category AC 20 disconnection is obtained by opening the tap-off unit cover. **Tap-off unit disconnection by opening or closing the cover should be carried out only if the downstream load is de-energised.**


With the cover open, no live parts are accessible.

The degree of protection is IPxxB. (protected against access with a finger).

DD210150.eps

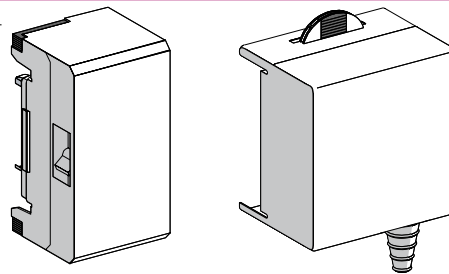

DD202075.eps

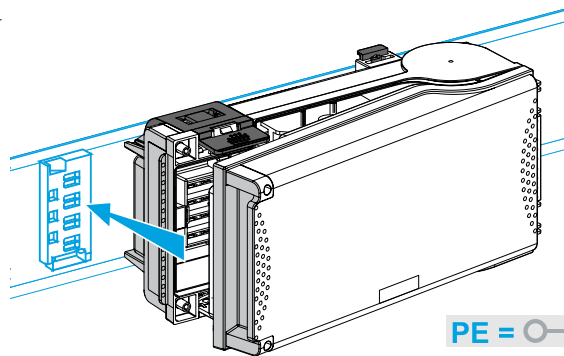

A number of safety devices prevent the operator from:

- plugging in the tap-off unit when the cover is closed
- closing the cover before the tap-off unit is locked onto the trunking
- unplugging the tap-off unit when the cover is closed.

1 Moulded plastic casing insulating material which is self-extinguishing and halogen free.

2 Power socket

3 Cover equipped with contact blades

4 Trunking locking device (four points)


5 Protection device area:

5a for fuses


5b for iC60 type modular devices

6 Cable exit knockouts

DD210176.eps

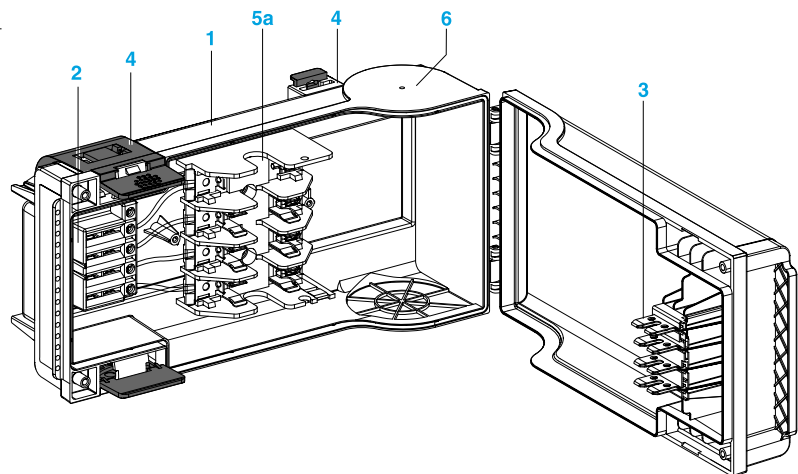

DD210177.eps

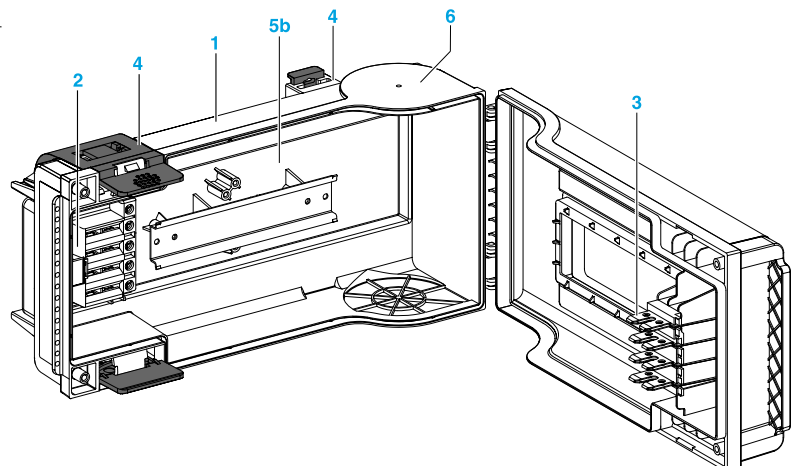

All tap-off units are manufactured in the KNA version (without a remote transmission bus).


They can be converted to the KNT version by adding an "Remote control power socket block" KNT 63ZT1 (see Accessories page) that must be ordered separately.

Single-phase tap-off units with phase selection, equipped with a iC60 circuit breaker

They are equipped with a phase selection system (L1, L2 or L3 + N + PE).
Positioned as close as possible to the loads; extension leads are not required.

Tap-off unit with circuit breaker

For protection of the tap-off circuit by a circuit breaker. It is equipped with a Multi 9 single-pole iC60 type circuit breaker.




Four-pole tap-off units for modular devices (not equipped)

Tap-off unit for modular devices

This tap-off unit accepts most devices available in multiples of 18 mm wide modules:

- rated current: 32 A
- maximum capacity: 5 modules.

Tap-off unit covers can be lead sealed to prevent circuit-breaker switching by unauthorised persons.



Tap-off units, with isolators, for modular devices (not equipped)


They can be equipped with modular Multi 9 iC60 type devices.

Rated current: 63 A

2 sizes available: 8 or 12 18 mm modules.

They are available with windows and blanking plates (devices visible and accessible) or with a plain cover (devices not accessible when energised).

Tap-off unit covers can be lead sealed to prevent circuit-breaker switching by unauthorised persons.

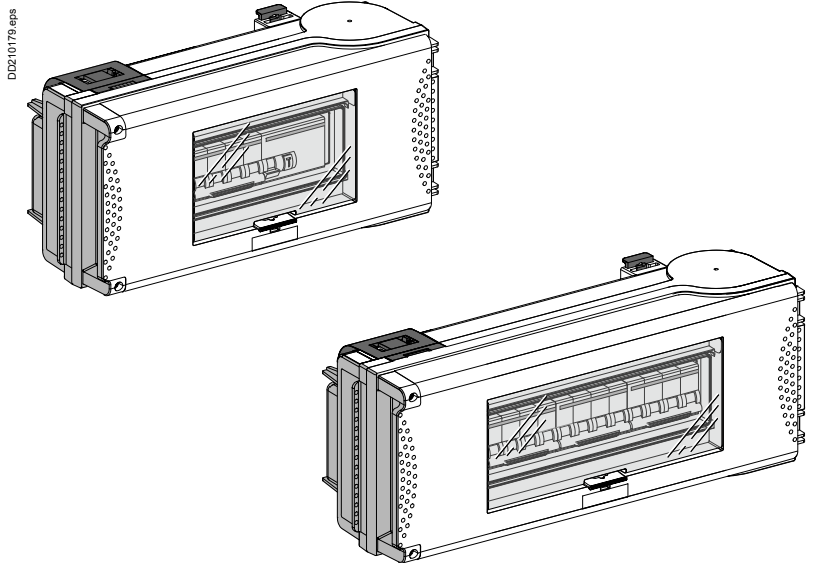

Tap-off units (with and without isolators) equipped with a SPD (Surge Protection Device)



These tap-off units (with and without isolators) are pre-equipped with a modular Type 2 SPD (Surge Protection Device), with integrated disconnection device.

2 versions of 3P + N protection are available, based on Quick PF10 or Quick PRD40r.

These units are ready for use, can be plugged directly into the busbar trunking and do not require any additional wiring.

They should be positioned at least 30 m upstream of each load to be protected.

Tap-off unit covers can be lead sealed to prevent the SPD (Surge Protection Device) being tampered with by unauthorised persons.

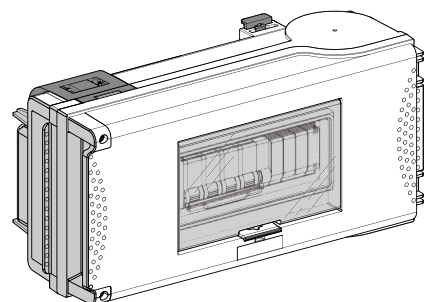

Description

IP55

U_e = 230...500 V

RAL 9001 white

Canalis KN, 40 to 160 A

Low-power distribution

Tap-off units with power sockets (not equipped)

For the supply of portable loads equipped with household or industrial plugs in a:

- garage,
- maintenance workshop,
- laboratory,
- battery charging room, etc.


Rated current: 32 A

Capacity: 8 modules in multiple of 18 mm wide

Two versions are available:

- pre-equipped with 2 PK or PratiKa power sockets
- customisable:
 - two 90 x 100 mm openings for PK-type (screw connections) or PratiKa (fast and reliable connection without stripping) industrial or household sockets.
 - direct mounting for industrial IEC 16 A 5P or IEC 32 A 3, 4 or 5P sockets.
 - mounting on 65 x 85 mm clip-on adapter plate for industrial IEC 16 A 3P or 5P and household 10/16 A 2P + PE sockets.

Tap-off unit covers can be lead sealed to prevent circuit-breaker switching by unauthorised persons.

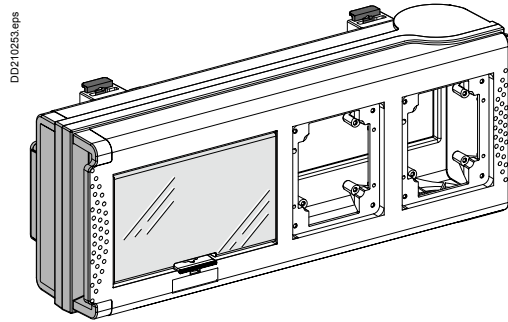


Tap-off units with fuse holders (not equipped)

For protection of the tap-off by a fuse (not supplied).

1 Single-phase tap-off unit

Can be equipped with fuse holders for:


- NF 8.5 x 31.5 fuse, 16 A maximum, gG and aM type,
- BS 88A1 fuse, 20 A maximum.



2 Four-pole tap-off unit

Can be equipped with fuse holders for:


- NF 10 x 38 fuse, 20 A maximum, gG type
- NF 10 x 38 fuse, 25 A maximum, aM type
- BS 88A1 fuse, 20 A maximum
- DIN Neozed E14 fuse, 16 A maximum.

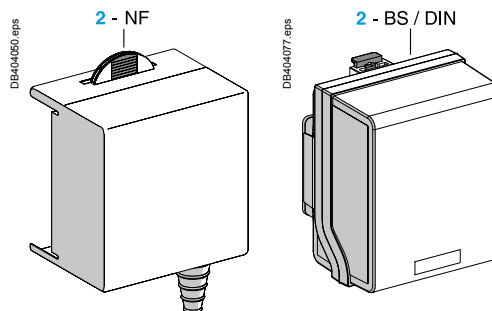

3 Tap-off unit with isolator

Can be equipped with fuse holders for:

- NF 14 x 51 fuse, gG and aM type 50 A maxi.
- BS 88A1 fuse, 30 A
- DIN fuse, type Diazed E27 25 A or Diazed E33 50 A or Neozed E18, 50 A.

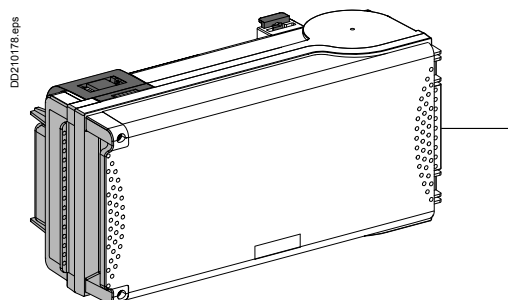


Accessories

Add-on bus connection block

Used to tap off the KNT bus.

Clips into all tap-offs with isolators and can be used to control the equipment via a bus (BatiBus...).


DD208538.eps

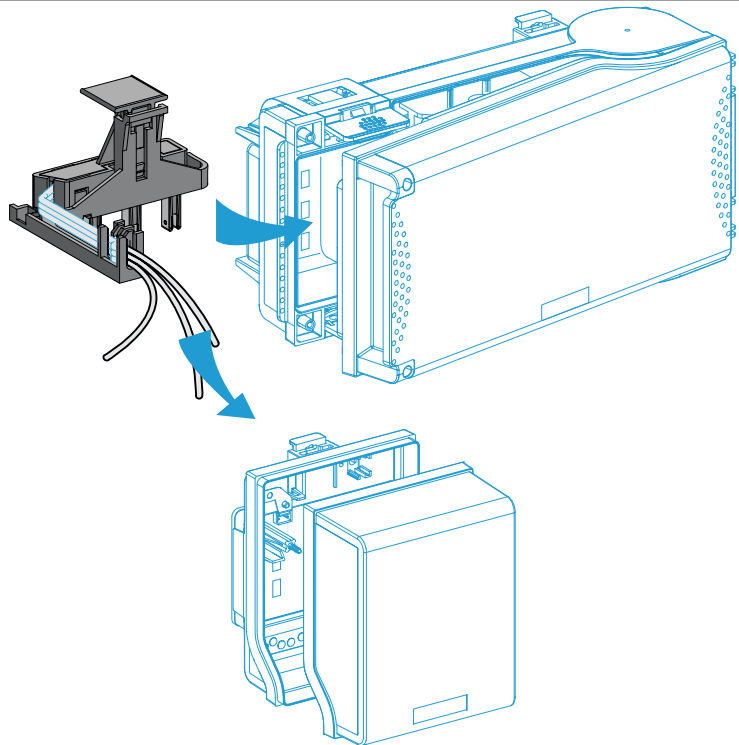

Outlet/tap-off unit interlocking device

Used to differentiate and mechanically lock out tap-off units when up to four different Canalis KN lines are present (voltage, frequency, etc.).


DD210181.eps

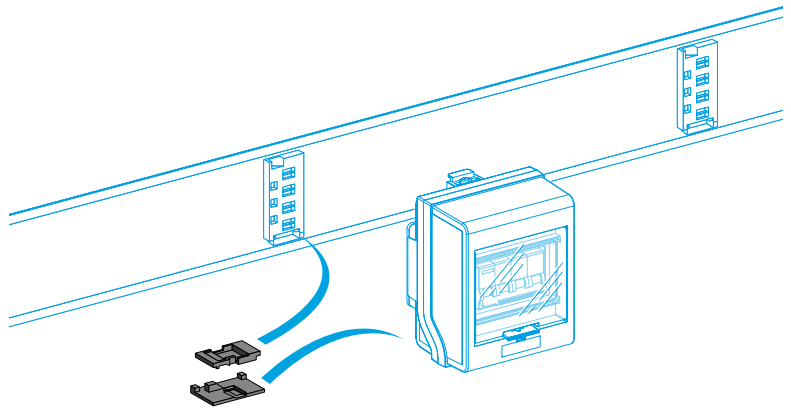

Straight lengths with tap-off outlets

Catalogue numbers


DD205840.eps

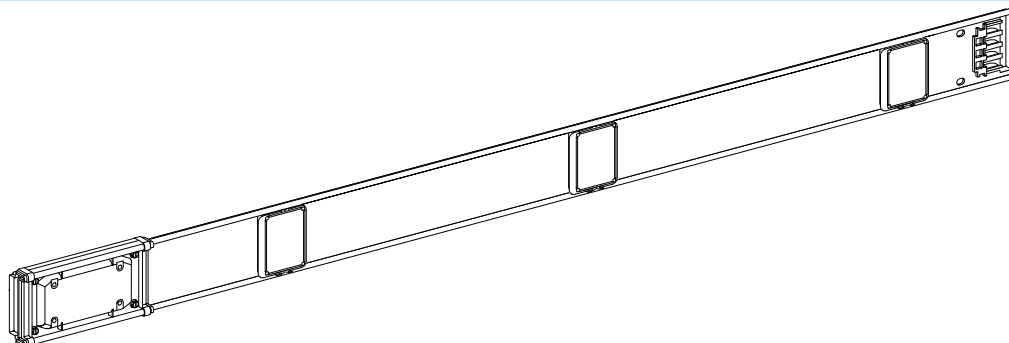


Standard lengths							
Polarity	3L + N + PE or 3L + PEN						
Rating (A)	40	63	100	160			
Length (mm)	3000	3000	3000	3000			
Number of tap-off outlets	3	6	3	6	3	6	3
Weight (kg)	5.60	5.60	5.70	5.70	6.70	6.70	7.30
Cat. no.	KNA40ED4303	KNA40ED4306	KNA63ED4303	KNA63ED4306	KNA100ED4303	KNA100ED4306	KNA160ED4303

Additional lengths						
Polarity	3L + N + PE or 3L + PEN					
Rating (A)	40	63		100		160
Length (mm)	3000	3000	2000	3000	2000	2000
Number of tap-off outlets	1	1	4	1	4	4
Weight (kg)	5.50	5.60	4.10	6.60	4.80	5.20
Cat. no.	KNA40ED4301	KNA63ED4301	KNA63ED4204	KNA100ED4301	KNA100ED4204	KNA160ED4204


Dimensions




KNA...ED4306



KNA...ED4303



KNA...ED4301



KNA...ED4204


Feed units (supplied with end cover)

Catalogue numbers



Designation	Feed unit						
Rating (A)	40 and 63	100	160	40 and 63	100	160	
Mounting	Left or right	Left or right	Left or right	Central	Central	Central	
Connection	Terminals	Lugs (M8 screws)	Lugs (M8 screws)	Terminals	Lugs (M8 screws)	Lugs (M8 screws)	
Max. size (mm²)	Flexible	16	35	95	16	35	95
	Rigid	25	50	95	25	50	95
Weight (kg)	0.58	1.12	2.80	1.47	2.94	5.50	
Cat. no.	KNA63AB4	KNA100AB4	KNA160AB4	KNA63ABT4	KNA100ABT4	KNA160ABT4	

Dimensions

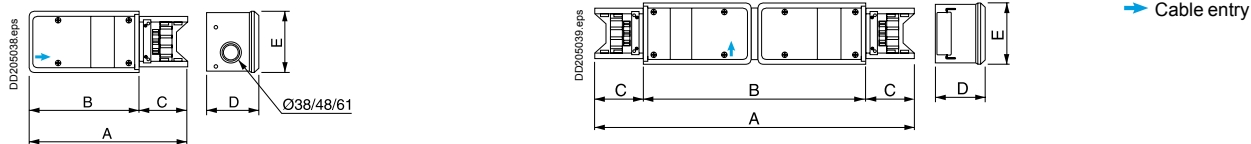

KNA...AB4


Dim.	A	B	C	D	E
40 to 63 A	265	165	100	71	92
100 A	340	238	102	112	127
160 A	256	258	98	130	185

KNA...ABT4

Dim.	A	B	C	D	E
40 to 63 A	535	335	100	71	92
100 A	685	481	102	112	127
160 A	600	502	98	122	243

Fixing system and routing system

Catalogue numbers

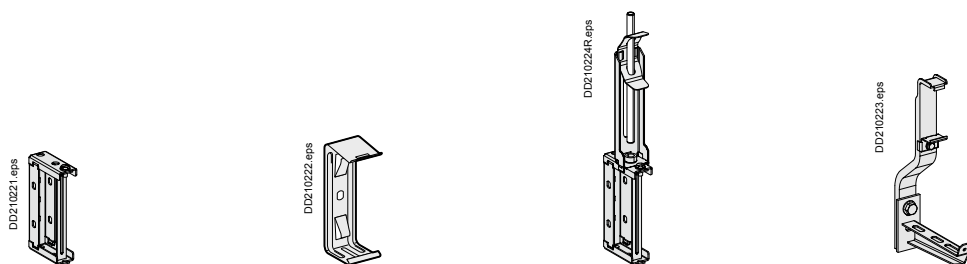


Designation	Fixing bracket		Spring fixing bracket	Fixing bracket
Rating (A)	40 to 160			
Max. load (kg)	80	39	100	11
Mounting	Suspended on M8 threaded rod ⁽¹⁾	Wall mounting ⁽²⁾	Suspended on M8 threaded rod ⁽¹⁾	Clipped on trunking ⁽³⁾
Order in multiple of	10	10	10	4
Weight (kg)	0.126	0.032	0.26	0.82
Cat. no.	KNB160ZF1	KNB160ZF2	KNB160ZFPU	KNB160ZFG100

(1) Maximum recommended distance between fixings: 3 meters.

(2) Maximum recommended distance between fixings: 2 meters.

(3) Maximum recommended distance between fixings: 1.5 meters.

Dimensions

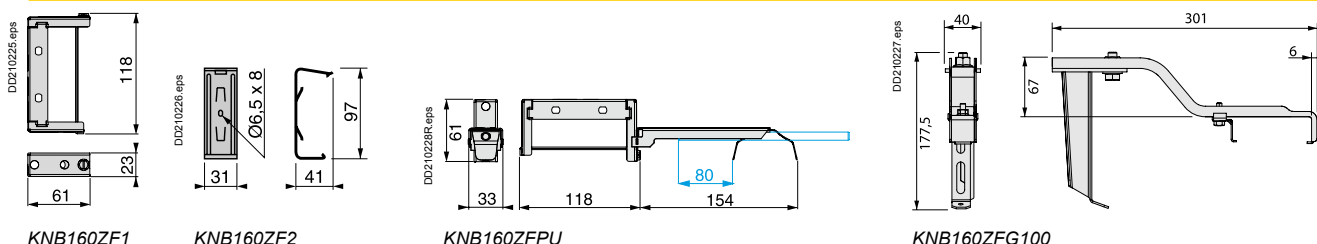

Catalogue numbers

Dimensions

IP55

Ue = 230...500 V

RAL 9001 white

Canalis KN, 40 to 160 A


Busbar trunking for low-power distribution

Complementary products

Straight lengths with built-in transmission bus


Catalogue numbers

DD202041.eps

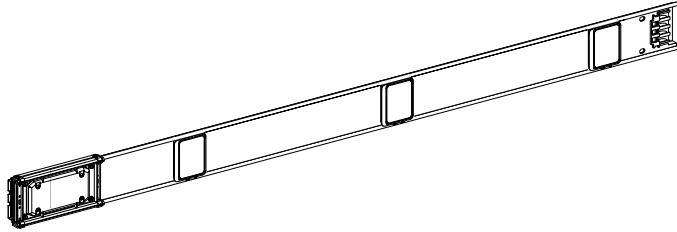


Polarity	3L + N + PE or 3L + PEN							
Rating (A)	40		63		100			
Length (mm)	3000		3000		2000	3000		2000
Number of tap-off outlets	3	6	3	6	4	3	6	4
Weight (kg)	5.6	5.6	5.7	5.7	4.1	6.7	6.7	4.8
Cat. no.	KNT40ED4303	KNT40ED4306	KNT63ED4303	KNT63ED4306	KNT63ED4204	KNT100ED4303	KNT100ED4306	KNT100ED4204


Dimensions



KNT...ED4306




KNT...ED4303




KNT...ED4204

Feed units with built-in transmission bus (supplied with end cover)

Catalogue numbers




DD210217.eps

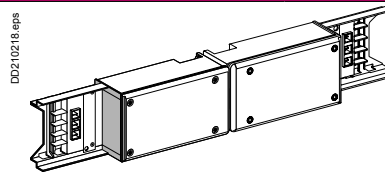

DD210218.eps


Designation	Feed unit			
Rating (A)	40 to 63		100	
Mounting	Left or right		Central	
Connection	Terminals		Lugs (M8 screws)	
Max. size (mm²)	Flexible	16	35	16
	Rigid	25	50	25
Weight (kg)	0.58		1.12	
Weight (kg)			1.47	
Weight (kg)			2.94	
Cat. no.	KNT63AB4		KNT100AB4	
			KNT63ABT4	
			KNT100ABT4	

Dimensions



Dim.	40 to 63 A	100 A
A	265	340
B	165	238
C	100	102
D	71	112
E	92	127

KNT...AB4

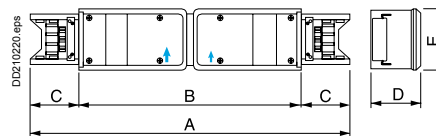

Dim.	40 to 63 A	100 A
A	535	685
B	335	481
C	100	102
D	71	112
E	92	127



KNT...ABT4

- ➔ Cable entry
- ➔ Transmission bus cable entry

Component for changing direction (one dimension)



Catalogue numbers

Standard

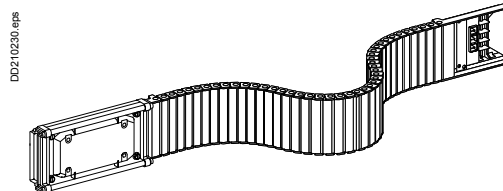


Designation	Flexible elbow, for internal or external angle, 80° to 180°			Flexible length, 1 m for detours around obstacles		
Rating (A)	40 to 63	100	160	40 to 63	100	160
Direction (edgewise)	Left or right			Left or right		
Weight (kg)	1.2	1.3	1.5	2.1	2.3	2.5
Cat. no.	KNA63DL4	KNA100DL4	KNA160DL4	KNA63DF410	KNA100DF410	KNA160DF410

With built-in transmission bus

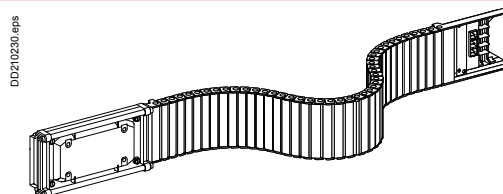

Designation	Flexible elbow, for internal or external angle, 80° to 180°		Flexible length, 1 m for detours around obstacles	
Rating (A)	40 to 63	100	40 to 63	100
Direction (edgewise)	Left or right		Left or right	
Weight (kg)	1.2	1.3	2.1	2.3
Cat. no.	KNT63DL4	KNT100DL4	KNT63DF410	KNT100DF410

Dimensions



KNA...DL4, KNT...DL4



KNA...DF410, KNT...DF410

Catalogue numbers

Dimensions

IP55

U_e = 230...500 V

RAL 9001 white


Canalis KN, 40 to 160 A

Busbar trunking for low-power distribution

Complementary products


Components for changing direction (two dimensions)

Catalogue numbers

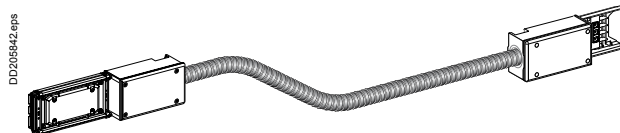

Designation	Elément souple de 3 m
Rating (A)	100
Direction (edgewise)	Left or right, up or down
Weight (kg)	5.00
Cat. no.	KNA100EDF430

Dimensions


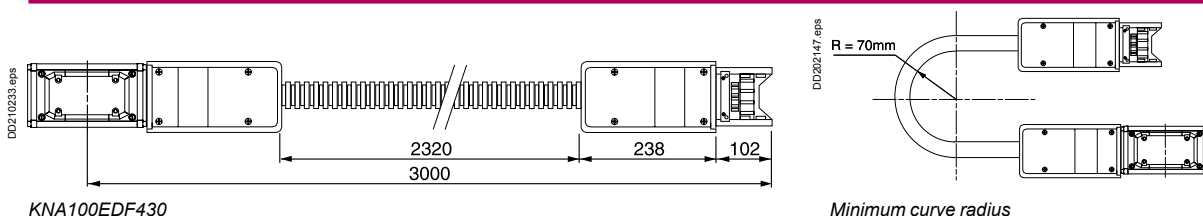


KNA100EDF430

Minimum curve radius

Trunking fixing system


Catalogue numbers



Designation	Pendant kit ⁽¹⁾	Cantilever arm, 100 mm
Rating (A)	40 to 160	40 to 160
Max. load (kg)	16	250
Mounting	Under ceiling or I-beam	Wall or pendant
Order in multiple of	4	4
Weight (kg)	1.60	0.35
Cat. no.	KNB160ZFKP1	KFBCA81100

⁽¹⁾ Maximum recommended distance between fixings: 3 meters.

Dimensions


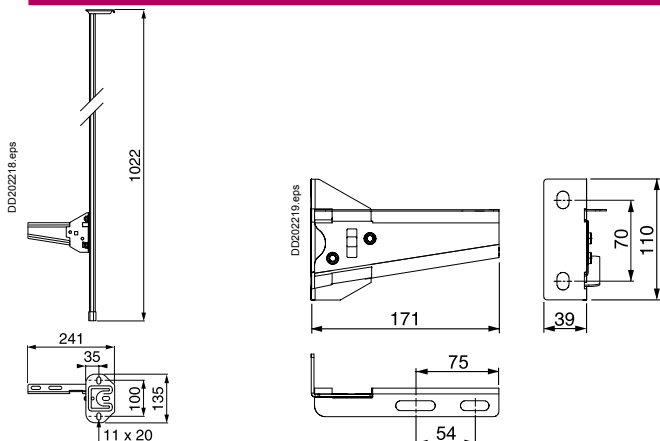


KNB160ZFKP1

KFBCA81100


Accessories - Spare parts with built-in transmission bus

Catalogue numbers



Designation	Electrical and mechanical jointing unit				IP55 blanking plate
Rating (A)	40 to 63	100 to 160	40 to 63	100	All
Order in multiple of	1	1	-	-	10
Weight (kg)	0.6	0.6	0.6	0.6	0.02
Cat. no.	KNA63ZJ4	KNA160ZJ4	KNT63ZJ4	KNT100ZJ4	KNB160ZB1

Dimensions

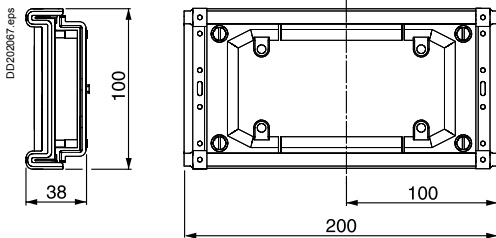

KNA●●ZJ4, KNT●●ZJ4

Catalogue numbers

Dimensions

$U_e = 230...500\text{ V}$
RAL 9001 white

Canalis KN, 40 to 160 A


Busbar trunking for low-power distribution

16 to 32 A tap-off units for modular devices

Single-phase IP41 tap-off unit with phase selection, equipped with a iC60 circuit breaker Disconnection by unplugging the tap-off unit

Catalogue numbers

Earthing system arrangement	Busbar trunking Connector	TT - TNS - TNC TT - TNS - TNS
-----------------------------	---------------------------	----------------------------------




Tap-off polarity	L + N + PE
E.g. circuit-breaker protection	


Rating (A)	16	
Circuit breaker (supplied)	iC60N, 1P, curve N	
Connection	iC60	
Max. size (mm ²)	Flexible	4
	Rigid	6
Cable gland (not supplied)	Cable clamp supplied	
Weight (kg)	0.34	
Cat. no.	KNB16CM2 ⁽¹⁾	KNB16CM2H ⁽¹⁾

⁽¹⁾ Adaptation for transmission bus (KNT) with remote control power socket block KNT63ZT1 not possible.

Dimensions



KNB16CM2
KNB16CM2H




KNB16CM2
KNB16CM2H

➔ Cable exit
— Centre line of tap-off outlets
⁽¹⁾ Protruding.

Four-pole IP55 tap-off unit (not equipped) ⁽¹⁾ Disconnection by unplugging the tap-off unit

Catalogue numbers

Earthing system arrangement	Busbar trunking Tap-off unit	TT - TNS - TNC - IT ⁽²⁾ TT - TNS - TNS - IT ⁽²⁾
-----------------------------	------------------------------	--



Tap-off polarity	3L + N + PE ⁽³⁾
E.g. circuit-breaker protection	

Rating (A)	32	
Circuit breaker (not supplied)	5 ⁽¹⁾	
Connection	Pre wired	
Max. size (mm ²)	Souple	6
	Rigide	10
Cable gland (not supplied)	ISO 32 max.	
Weight (kg)	0.60	
Cat. no.	KNB32CM55	


⁽¹⁾ Supplied with blanking plate (1 x 5 divisible).

⁽²⁾ The neutral must be protected or not distributed (3L + PE) for IT system.


⁽³⁾ Also suitable for tap-off unit 3L + PE (N not distributed).

⁽⁴⁾ Maximum diameter for a multipolar cable.

Dimensions



KNB32CM55




➔ Cable exit
— Centre line of tap-off outlets
⁽⁵⁾ Protruding.

63 A tap-off units for modular devices

Tap-off unit IP55 with isolator (not equipped) ⁽¹⁾ Disconnection by opening the tap-off unit cover

Catalogue numbers

Earthing system arrangement	Busbar trunking	TT - TNS - TNC - IT ⁽²⁾
	Tap-off unit	TT - TNS - TNS - IT ⁽²⁾



Tap-off polarity	3L + N + PE ⁽³⁾	
E.g. circuit-breaker protection		
Rating (A)	63	
Circuit breaker (not supplied)	12 ⁽¹⁾	12 ⁽¹⁾
Connection	Tunnel terminals	
Max. size (mm²)	Flexible	25
	Rigid	25
Cable gland (not supplied)	ISO 50 max.	ISO 50 max. or 1 x 32 + 2 x 25
Weight (kg)	2.40	2.70
Cat. no.	KNB63SM48	KNB63SM412


⁽¹⁾ Supplied with blanking plates 2 x 5 divisible.

⁽²⁾ The neutral must be protected or not distributed (3L + PE) for IT system.


⁽³⁾ Also suitable for tap-off unit 3L + PE (N not distributed).

⁽⁴⁾ Maximum diameter for a multipolar cable.


Dimensions




X = 432.5

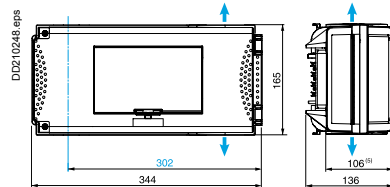

KNB63SM48



X = 491

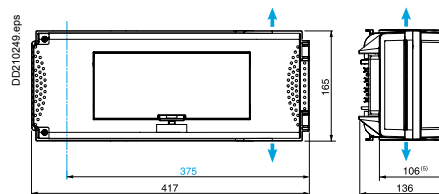

KNB63SM412

→ Cable exit
 - - - Centre line of tap-off outlets

⁽⁵⁾ Protruding.

Catalogue numbers

Dimensions

IP55

U_e = 230...500 V

RAL 9001 white

Canalis KN, 40 to 160 A

Busbar trunking for low-power distribution


32 A tap-off unit, with power sockets protected by modular devices

Tap-off unit with power sockets ⁽¹⁾⁽²⁾

Disconnection by unplugging the tap-off unit


Catalogue numbers

Earthing system arrangement	Busbar trunking	TT - TNS - TNC - IT ⁽³⁾
	Tap-off unit	TT - TNS - TNS - IT ⁽³⁾



Tap-off polarity 3L + N + PE

E.g. circuit-breaker protection
Tap-off unit wiring depends on the sockets used



Rating (A)	32								
Number of modules (18 mm)	8 ⁽¹⁾								
Equipment	Quantity	2	2	1	1	1	1	1	1
	Type	Household socket Schuko	Household socket NF	Household socket NF	Industrial socket	Household socket Schuko	Industrial socket	Industrial socket	Industrial socket
	Current (A)	10/16	10/16	10/16	16	10/16	16	16	16
	Voltage (V)	230	230	230	415	230	415	230	415
	Polarity	2P + T	2P + T	2P + T	3P + N + T	2P + T	3P + N + T	2P + T	3P + N + T
Weight (kg)	2.90		2.90	3.00	3.00		3.10		
Cat. no. ⁽⁴⁾	KNB32CP11D	KNB32CP11F	KNB32CP15F	KNB32CP15D		KNB32CP35			


⁽¹⁾ Supplied with blanking plate (1 x 5 divisible).

⁽²⁾ These tap-off units are equipped with flush-mounted power sockets.

⁽³⁾ The neutral must be protected or not distributed (3L + PE) for IT system.

⁽⁴⁾ Adaptation for transmission bus (KNT) with remote control power socket block KNT63ZT1 not possible.

Dimensions

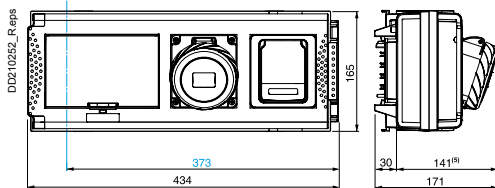

KNB32CP●●●

— Centre line of tap-off outlets

⁽⁵⁾ Protruding.


32 A tap-off unit, for power sockets protected by modular devices

Empty tap-off units ^{(1) (2)}

Disconnection by unplugging the tap-off unit

Catalogue numbers


Earthing system arrangement	Busbar trunking	TT - TNS - TNC - IT ⁽³⁾
	Tap-off unit	TT - TNS - TNS - IT ⁽³⁾



Tap-off polarity	3L + N + PE
E.g. circuit-breaker protection	
Tap-off unit wiring depends on the sockets used	
Rating (A)	32
Number of modules (18 mm)	8 ⁽¹⁾
Equipment	Tap-off unit not equipped. Free choice of equipment and power sockets
Weight (kg)	2.70
Cat. no. ⁽⁴⁾	KNB32CP

- ⁽¹⁾ Supplied with blanking plate (1 x 5 divisible).
- ⁽²⁾ This tap-off unit is equipped with an adapter plate for flush-mounted power sockets.
- ⁽³⁾ The neutral must be protected or not distributed (3L + PE) for IT system.
- ⁽⁴⁾ Adaptation for transmission bus (KNT) with remote control power socket block KNT63ZT1 not possible.

Dimensions

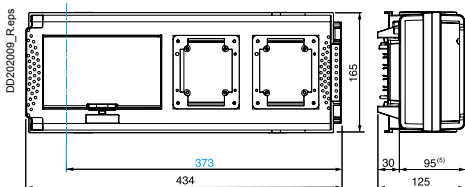

KNB32CP

— Centre line of tap-off outlets

⁽⁵⁾ Protruding

Power sockets

Catalogue numbers



Designation	Industrial sockets							
Rated current (A)	16				32 ⁽⁶⁾			
Rated voltage (V AC)	200-250		380-415		200-250		380-415	
Number of poles	2P + T	3P + N + T	2P + T	3P + N + T	2P + T	3P + N + T	2P + T	3P + N + T
Dimensions (W x H in mm)	65 x 85	90 x 100	65 x 85	90 x 100	90 x 100	90 x 100	90 x 100	90 x 100
Cat. no.	PKY16F723	PKY16F725	PKY16F733	PKY16F735	PKY32F723	PKY32F725	PKY32F733	PKY32F735

Designation	Household NF sockets	Household Schuko sockets	Screw-on plate	
Rated current (A)	10 to 16	10 to 16	For blanking of unused openings	For adapting 65 x 85 mm power-socket bases
Rated voltage (V AC)	250	250	-	-
Number of poles	2P + T	2P + T	-	-
Dimensions (W x H in mm)	65 x 85	65 x 85	-	-
Weight (kg)	-	-	0.10	0.09
Cat. no.	81140	81141	13137	13136

⁽⁶⁾ The sum of currents in the 2 sockets installed on the tap-off units \leq 32 A.

Canalis KN, 40 to 160 A


Busbar trunking for low-power distribution

16 to 25 A tap-off units for NF fuses

Single-phase IP41 tap-off unit with phase selection for cylindrical fuses Disconnection by unplugging the tap-off unit


Catalogue numbers

Earthing system arrangement	Busbar trunking	TT - TNS - TNC
	Tap-off unit	TT - TNS - TNS



Tap-off polarity L + N + PE


E.g. fuse protection



Rating (A)	16	
For fuses (not supplied)	NF 8.5 x 31.5, Type gG: 16 A max., Type aM : 16 A max.	
Connection	Cable clamp terminals	
Max. size (mm ²)	Flexible	4
	Rigid	6
Cable gland (not supplied)	Cable clamp supplied	
Weight (kg)	0.16	
Cat. no.	KNB16CF2 ⁽¹⁾	

⁽¹⁾ Adaptation for transmission bus (KNT) with remote control power socket block KNT63ZT1 not possible.

Dimensions




KNB16CF2

➔ Cable exit
— Centre line of tap-off outlets
⁽²⁾ Protruding.

Four-pole IP55 tap-off unit for cylindrical fuses Disconnection by unplugging the tap-off unit


Catalogue numbers

Earthing system arrangement	Busbar trunking	TT - TNS - TNC	IT
	Tap-off unit	TT - TNS - TNS	IT



Tap-off polarity 3L + N + PE ⁽³⁾ 3L + PE

E.g. fuse protection

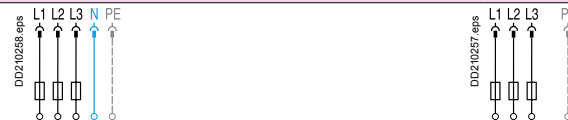


Rating (A)	25	
For fuses (not supplied)	NF 10 x 38, Type gG: 20 A max., Type aM: 25 A max.	
Connection	Cable clamp terminals	
Max. size (mm ²)	Flexible	6
	Rigid	10
Cable gland (not supplied)	Cable clamp supplied	
Weight (kg)	0.38	
Cat. no.	KNB25CF5 ⁽²⁾	

⁽¹⁾ Also suitable for tap-off unit 3L + PE (N not distributed).

⁽²⁾ Adaptation for transmission bus (KNT) with remote control power socket block KNT63ZT1 not possible.

Dimensions



KNB25CF5


➔ Cable exit
— Centre line of tap-off outlets
⁽³⁾ Protruding.

50 A tap-off units for NF fuses

Tap-off unit IP55 with isolator for cylindrical fuses Disconnection by opening the tap-off unit cover

Catalogue numbers



Earthing system arrangement	Busbar trunking	TT - TNS - TNC	IT
	Tap-off unit	TT - TNS - TNS	IT



Tap-off polarity	3L + N + PE ⁽¹⁾	3L + PE
E.g. fuse protection		
Rating (A)	50	
For fuses (not supplied)	NF 14 x 51 Type gG: 50 A max. Type aM: 50 A max.	
Connection	Cable clamp terminals	
Max. size (mm²)	Flexible	16
	Rigid	16
Cable gland ⁽²⁾ (not supplied)	ISO 50 max.	
Weight (kg)	1.50	
Cat. no.	KNB50SF4	

⁽¹⁾ Also suitable for tap-off unit 3L + PE (N not distributed)
⁽²⁾ Maximum diameter for a multipolar cable.

Dimensions

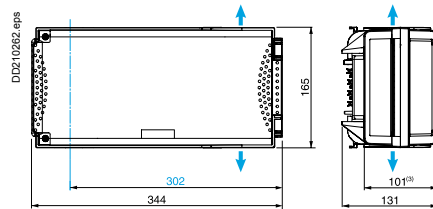

KNB50SF4

→ Cable exit
— Centre line of tap-off outlets

⁽⁵⁾ Protruding.

Catalogue numbers

Dimensions

IP55

U_e = 230...500 V

RAL 9001 white

Canalis KN, 40 to 160 A

Busbar trunking for low-power distribution


16 to 20 A tap-off units for BS fuses

Single-phase tap-off unit with phase selection for screw-mounted fuses

Disconnection by unplugging the tap-off unit


Catalogue numbers

Earthing system arrangement	Busbar trunking Tap-off unit	TT - TNS - TNC TT - TNS - TNS
-----------------------------	------------------------------	----------------------------------



Tap-off polarity L + N + PE


E.g. fuse protection



Rating (A)	16	
For fuses (not supplied)	BS88 A1	
Connection	Cable clamp terminals	
Max. size (mm ²)	Flexible	4
	Rigid	6
Cable gland (not supplied)	Cable clamp supplied	
Weight (kg)	0.16	
Cat. no.	KNB16CG2⁽¹⁾	

⁽¹⁾ Adaptation for transmission bus (KNT) with remote control power socket block KNT63ZT1 not possible.

Dimensions




→ Cable exit
— Centre line of tap-off outlets
⁽²⁾ Protruding.

Four-pole tap-off unit for screw-mounted fuses

Disconnection by unplugging the tap-off unit



Catalogue numbers

Earthing system arrangement	Busbar trunking Tap-off unit	TT - TNS - TNC TT - TNS - TNS	IT IT
-----------------------------	------------------------------	----------------------------------	----------



Tap-off polarity 3L + N + PE⁽¹⁾

E.g. fuse protection




Rating (A)	20	
For fuses (not supplied)	BS88 A1	
Connection	Cable clamp terminals	
Max. size (mm ²)	Flexible	6
	Rigid	10
Cable gland (not supplied)	ISO 32 max.	
Weight (kg)	0.60	
Cat. no.	KNB20CG5⁽³⁾	

⁽¹⁾ Also suitable for tap-off unit 3L + PE (N not distributed).

⁽²⁾ Maximum diameter for a multipolar cable.

⁽³⁾ Adaptation for transmission bus (KNT) with remote control power socket block KNT63ZT1 not possible.

Dimensions




→ Cable exit
— Centre line of tap-off outlets
⁽⁴⁾ Protruding.

32 A tap-off units for BS fuses

Tap-off unit with isolator for screw-mounted fuses Disconnection by opening the tap-off unit cover

Catalogue numbers

Earthing system arrangement	Busbar trunking	TT - TNS - TNC	IT
	Tap-off unit	TT - TNS - TNS	IT




Tap-off polarity	3L + N + PE ⁽¹⁾	3L + PE
E.g. fuse protection		
Rating (A)	32	
For fuses (not supplied)	BS88 A1	
Connection	Cable clamp terminals	
Max. size (mm ²)	Flexible	10
	Rigid	10
Cable gland (not supplied)	ISO 50 maxi.	
Weight (kg)	1.50	
Cat. no.	KNB32SG4	


⁽¹⁾ Also suitable for tap-off unit 3L + PE (N not distributed).

⁽²⁾ Maximum diameter for a multipolar cable.

Dimensions



X = 432.5

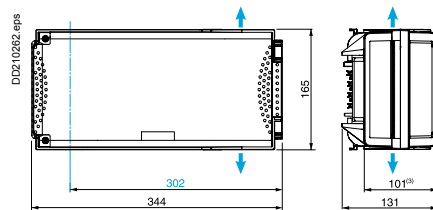

KNB32SG4

→ Cable exit
— Centre line of tap-off outlet

⁽⁵⁾ Protruding.

Catalogue numbers

Dimensions

IP55

U_e = 230...415 V

RAL 9001 white

Canalis KN, 40 to 160 A

Busbar trunking for low-power distribution


16 A tap-off units and 25 to 50 A tap-off units for DIN fuses

Four-pole tap-off unit for screw-type fuses

Disconnection by unplugging the tap-off unit

Catalogue numbers

Earthing system arrangement	Busbar trunking	TT - TNS - TNC	IT
	Tap-off unit	TT - TNS - TNS	IT




Tap-off polarity	3L + N + PE ⁽¹⁾	3L + PE
E.g. fuse protection	 DD210258.eps	 DD210257.eps
Rating (A)	16	
For fuses (not supplied)	Néozed E14	
Connection	Screw terminal	
Max. size (mm ²)	Flexible	4
	Rigid	6
Cable gland (not supplied)	ISO 32 max.	
Weight (kg)	0.60	
Cat. no.	KNB16CN5 ⁽³⁾	

⁽¹⁾ Also suitable for tap-off unit 3L + PE (N not distributed).

⁽²⁾ Maximum diameter for a multipolar cable.

⁽³⁾ Adaptation for transmission bus (KNT) with remote control power socket block KNT63ZT1 not possible.

Dimensions



KNB16CN5


→ Cable exit
→ Centre line of tap-off outlets
⁽⁴⁾ Protruding.

Tap-off units for screw-type fuses

Disconnection by unplugging the tap-off unit

Catalogue numbers

Earthing system arrangement	Busbar trunking	TT - TNS - TNC	IT
	Tap-off unit	TT - TNS - TNS	IT




Tap-off polarity	3L + N + PE ⁽¹⁾	3L + PE	
E.g. fuse protection	 DD210259.eps	 DD210260.eps	
Rating (A)	25	50	50
For fuses (not supplied)	Diazed E27	Néozed E18	Diazed E33
Connection	Tunnel terminals	Tunnel terminals	Tunnel terminals
Max. size (mm ²)	Flexible	16	16
	Rigid	16	16
Cable gland (not supplied)	ISO 50 max.	ISO 50 max.	ISO 50 max.
Weight (kg)	1.50	1.50	1.50
Cat. no.	KNB25SD4	KNB50SN4	KNB50SD4

⁽¹⁾ Also suitable for tap-off unit 3L + PE (N not distributed).


⁽²⁾ Maximum diameter for a multipolar cable.

Note: Tap-off unit disconnection by opening the cover should be carried out only if the downstream load is de-energised.

Dimensions



X = 432.5

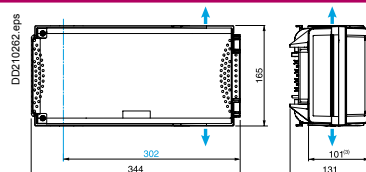

KNB●●S●4


IP55
 Ue = 230...415 V
 RAL 9001 white

Tap-off units equipped with a surge arrester

Tap-off units equipped with a surge arrester Disconnection by unplugging the tap-off unit

Catalogue numbers

Earthing system arrangement	Busbar trunking	TT - TNS - TNC
-----------------------------	-----------------	----------------




Tap-off polarity	3L + N + PE ⁽¹⁾
Diagram	
Protection type	Type 2
Surge arrester cartridges (supplied)	Fixed
Connection	Pre-wired
Permissible short-circuit	Isc (kA) 6
Max. discharge current	I _{max} (kA) 10
Weight (kg)	1.3
Cat. no.	KNBQPF

Surge arrester installed: Quick PF10, 3P + N, cat. no. 16618 (Type 2 monoblock surge arrester, with fixed cartridges and integrated disconnection device, certified IEC 81643-1, EN 61643-11).

⁽¹⁾ Also suitable for tap-off unit 3L + PE (N not distributed).

Dimensions



KNBQPF

— Centre line of tap-off outlets

⁽⁵⁾ Protruding.

Catalogue numbers

Dimensions

IP55

U_e = 230...500 V

RAL 9001 white

Canalis KN, 40 to 160 A

Busbar trunking for low-power distribution


Tap-off units equipped with a surge arrester

Tap-off units with isolator equipped with a surge arrester

Disconnection by opening the tap-off unit cover


Catalogue numbers

Earthing system arrangement	Busbar trunking	TT - TNS - TNC
-----------------------------	-----------------	----------------



Tap-off polarity	3L + N + PE ⁽¹⁾
------------------	----------------------------

Diagram




Protection type	Type 2
Surge arrester cartridges (supplied)	Removable
Connection	Pre-wired
Permissible short-circuit	I _{sc} (kA) 25
Max. discharge current	I _{max} (kA) 40
Weight (kg)	3.40
Cat. no.	KNBQPRD


Surge arrester installed: Quick PRD40r, 3P + N, cat. no. 16294 (Type 2 monoblock surge arrester, with fixed cartridges and integrated disconnection device, certified IEC 81643-1, EN 61643-11).

⁽¹⁾ Also suitable for tap-off unit 3L + PE (N not distributed).

Dimensions



X = 432.5

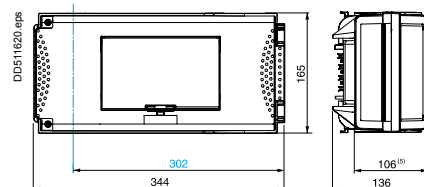

KNBQPRD

— Centre line of tap-off outlets


⁽⁵⁾ Protruding.

Accessories

Accessories

Catalogue numbers

For all tap-off units



Designation	Outlet/tap-off unit interlocking device			
Colour	White	Red	Yellow	Blue
Order in multiple of	10	10	10	10
Weight (kg)	0.01	0.01	0.01	0.01
Cat. no.	KNB160ZL10	KNB160ZL20	KNB160ZL30	KNB160ZL40


For tap-off units with modular devices

Designation	Modular blanking plate	Screw-on plate		Adhesive label ⁽¹⁾		
Description	Divisible set of 10 x 5	For blanking of unused openings	For adapting 65 x 85 mm power-socket bases	Set of 12 label-holders (height 24 mm)	Set of 12 labels (height 24 mm)	Set of 12 divisible labels (height 24 mm)
Weight (kg)	0.08	0.10	0.09	0.50	0.50	0.50
Cat. no.	13940	13137	13136	08905	08903	08907

⁽¹⁾ Self-adhesive support complete with transparent cover and paper label.

Catalogue numbers

For tap-off units ⁽²⁾



Designation	Remote control power socket block
Order in multiple of	1
Weight (kg)	0.035
Cat. no.	KNT63ZT1


⁽²⁾ KNT63ZT1 is compatible with the following tap-off units:

- Four-pole tap-off unit
- Tap-off unit with isolator
- Tap-off unit with isolator for cylindrical fuses
- Tap-off unit with isolator for screw-mounted fuses
- Tap-off units for screw-type fuses.


Canalis KN, 40 to 160 A

Busbar trunking for low-power distribution
Assembly of trunking components


Assembling the straight lengths

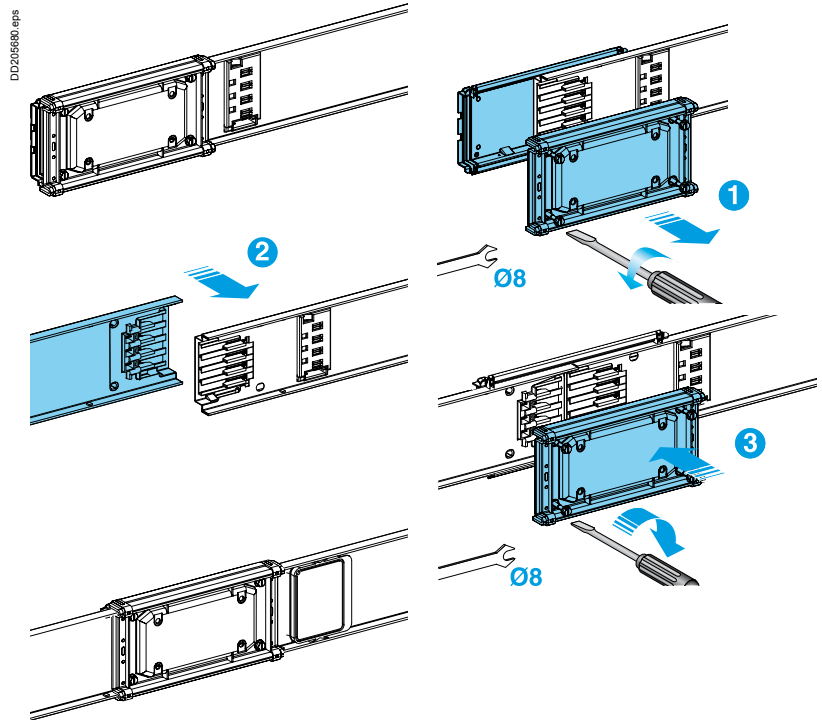


Connecting the feed-unit

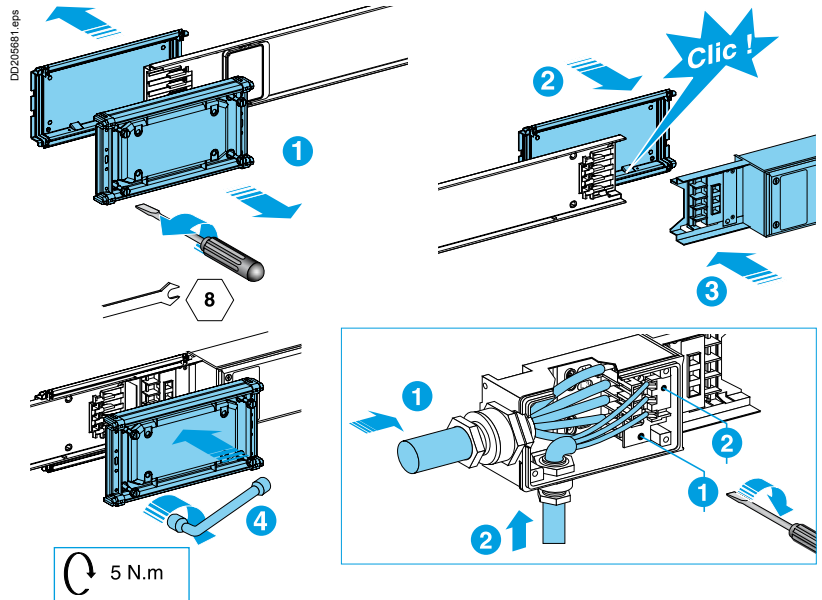


Assembling the end cover

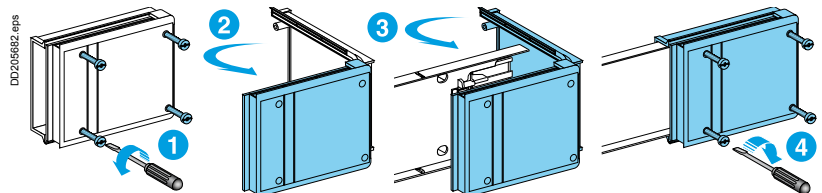


Fixing Canalis KN in the brackets

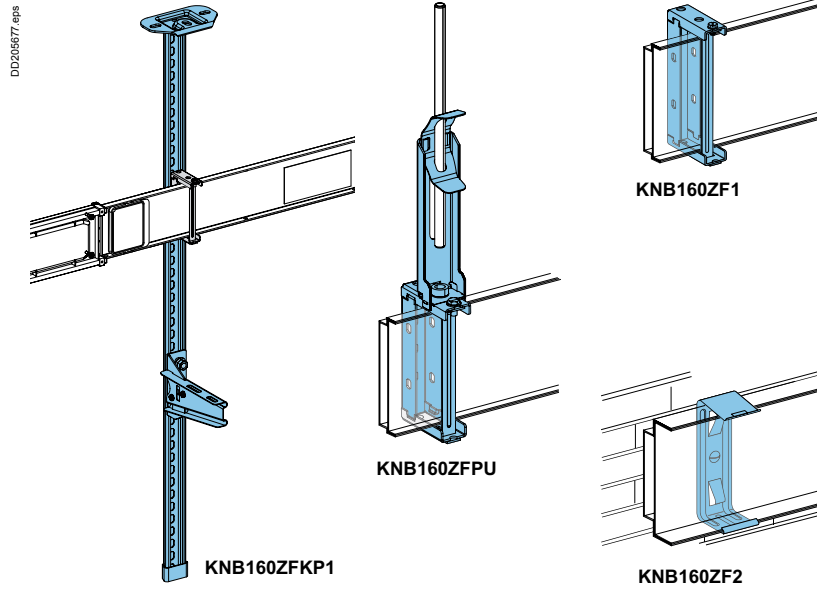

Mounting the tap-off unit

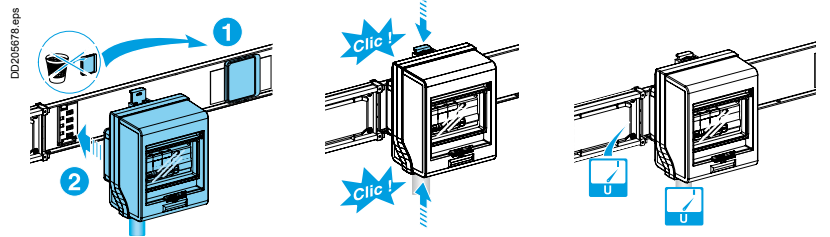

Mounting the tap-off unit with power sockets

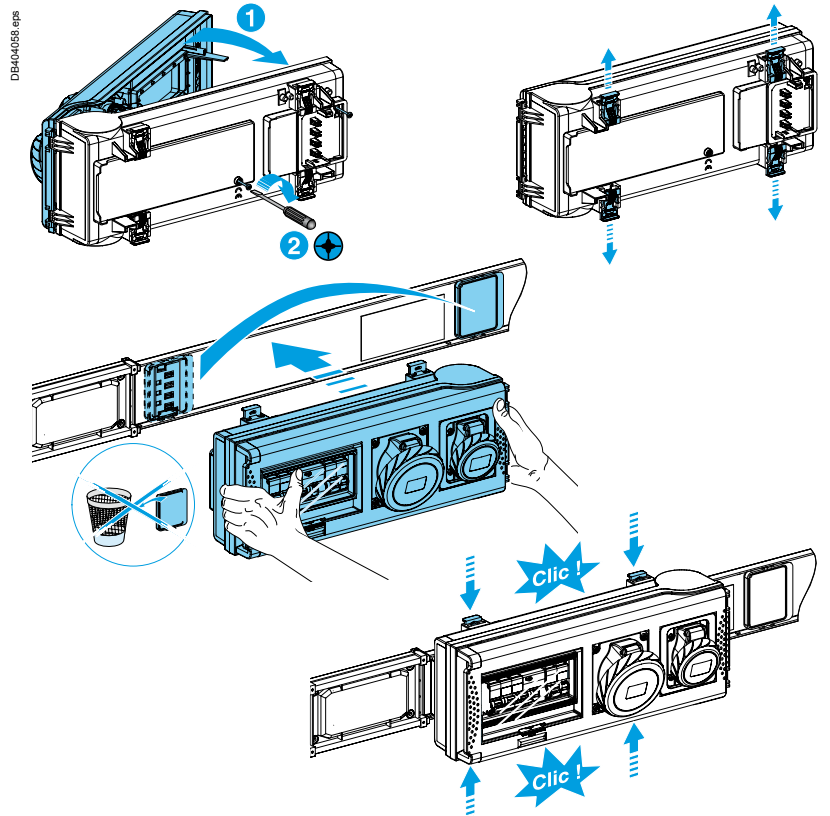

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

<i>Index</i>	3
<i>Introduction</i>	9
<i>Design guides and characteristics</i>	29
<i>Canalis KDP</i>	57
<i>Canalis KBA</i>	79
<i>Canalis KBB</i>	99
<i>Canalis KN</i>	121

Presentation

Canalis KS	154
For medium-power distribution from 100 to 1000 A	154

Description

Canalis KS, 100 to 1000 A	158
Medium-power distribution	158
Compatibility of tap-off units and busbar trunkings	165

Catalogue numbers - Dimensions

Canalis KS, 100 to 400 A	167
Busbar trunking for medium-power distribution	167
Complementary products	170
Canalis KS, 500 to 630 A	174
Busbar trunking for medium-power distribution	174
Complementary products	176
Canalis KS, 800 to 1000 A	180
Busbar trunking medium-power distribution	180
Complementary products	182
Canalis KS, 100 to 1000 A	186
Busbar trunking for medium-power distribution	186
32 to 100 A tap-off units for modular devices	186
32 A tap-off unit with power sockets protected by modular devices	187
160 to 400 A tap-off units for Compact NSX circuit breakers	188
250 and 400 A tap-off units for measurements and metering	189
125 to 160 A tap-off units for modular circuit breakers	190
160 A tap-off units for modular circuits breakers	191
250 to 400 A tap-off units for Fupact INF switch-disconnector fuses	192
32 to 100 A tap-off units for NF fuses	193
100 to 400 A tap-off units for NF fuses	194
16 to 63 A Tap-off units for DIN fuses	195
100 to 400 A tap-off units for DIN fuses	196
20 to 160 A tap-off units for BS fuses	197
Tap-off units equipped with a surge arrester	198
Accessories	199


<i>Canalis KS riser</i>	205
<i>Canalis KT</i>	225
<i>Technical specifications</i>	231
<i>Maintenance</i>	239
<i>Recommendations for special applications</i>	243
<i>Catalogue numbers</i>	273
<i>Canalis worldwide</i>	279

Canalis KS

For medium-power distribution
from 100 to 1000 A

PD202208_rW2_eps


Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

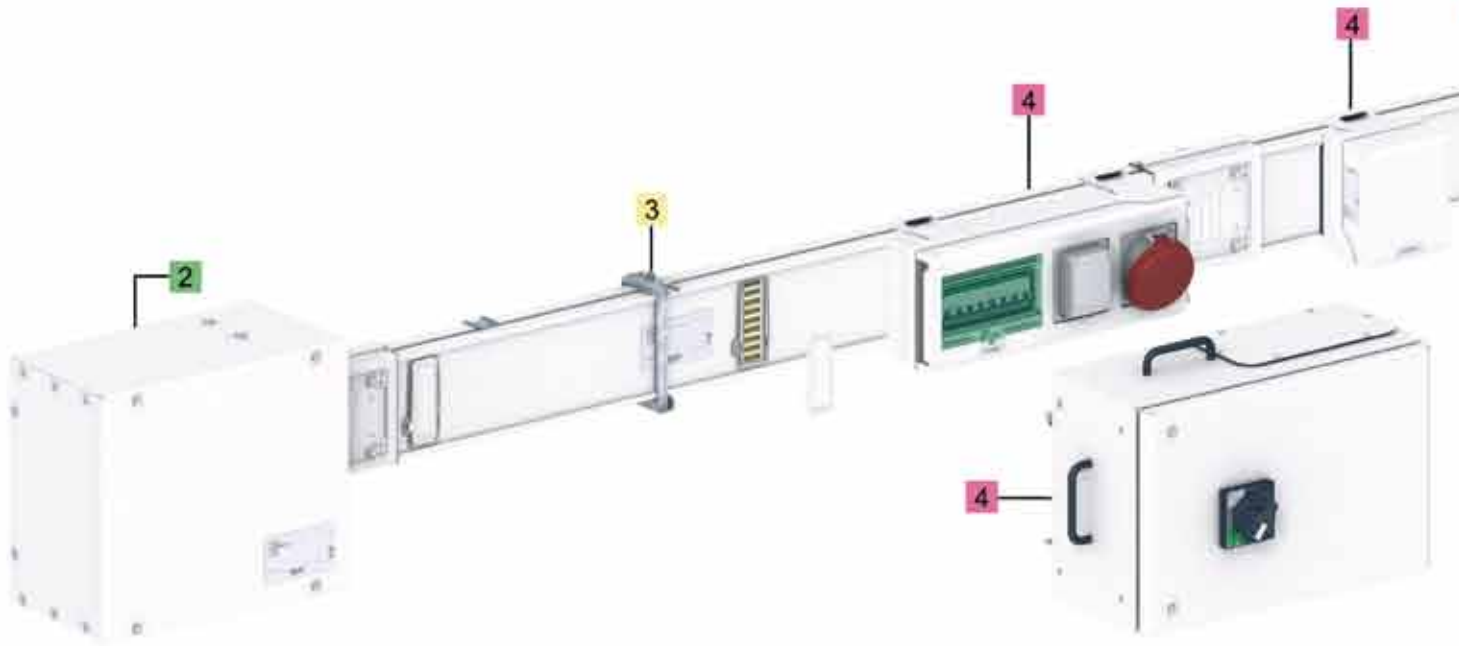

1. Run components

- Rating: 100, 160, 250, 400, 500, 630, 800, 1000 A.
- 4 live conductors.
- Length:
 - basic components: 3 and 5 metres.
 - additional lengths: 1.5 and 2 metres.

PD202204_rWeps

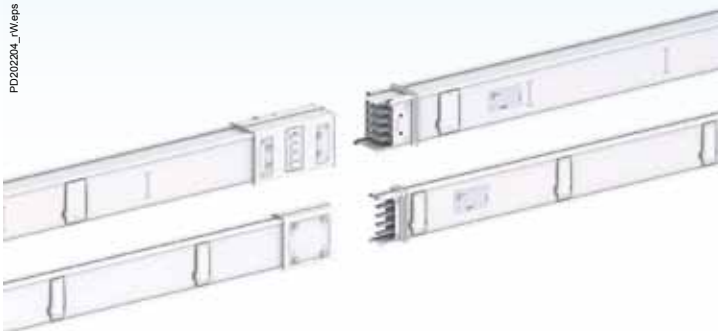


2. Feed units and end covers

- The feed units delivered with end covers, receive the cables supplying one end or any other point of Canalis KS trunking.

PD202205_rWeps



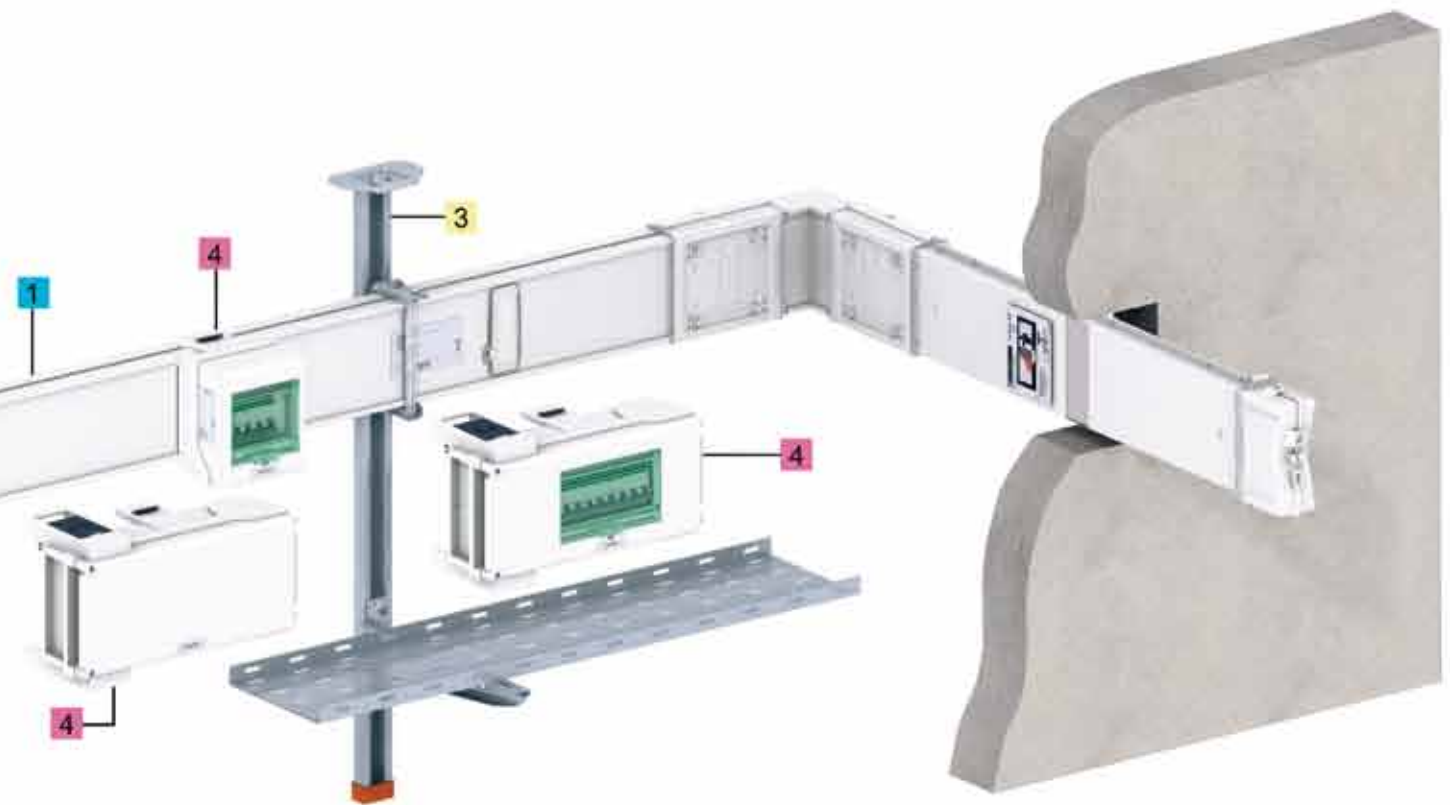

3. Fixing system

■ The fixing system ensures that Canalis KS is well secured, whatever the type of building structure.

DB403871.eps



4. Tap-off units

■ The tap-off units (with and without isolators) are used to:

- supply loads from 25 to 400 A
- or protect nearby loads against overloads due to lightning strikes.

■ Protection is ensured with modular or Compact NSX circuit breakers or fuses.

P1202207_1/Meips



Canalis KS

For medium-power distribution
from 100 to 1000 A

Please refer to the Canalis KS catalogue, reference DEBU026EN,
available on schneider-electric.com




No toxic emission in case of fire

All components in the KS range are **halogen free**.
In case of fire, Canalis KS does not release smoke or
toxic gases.



DD202141_r_eps

<Standardfranchise>

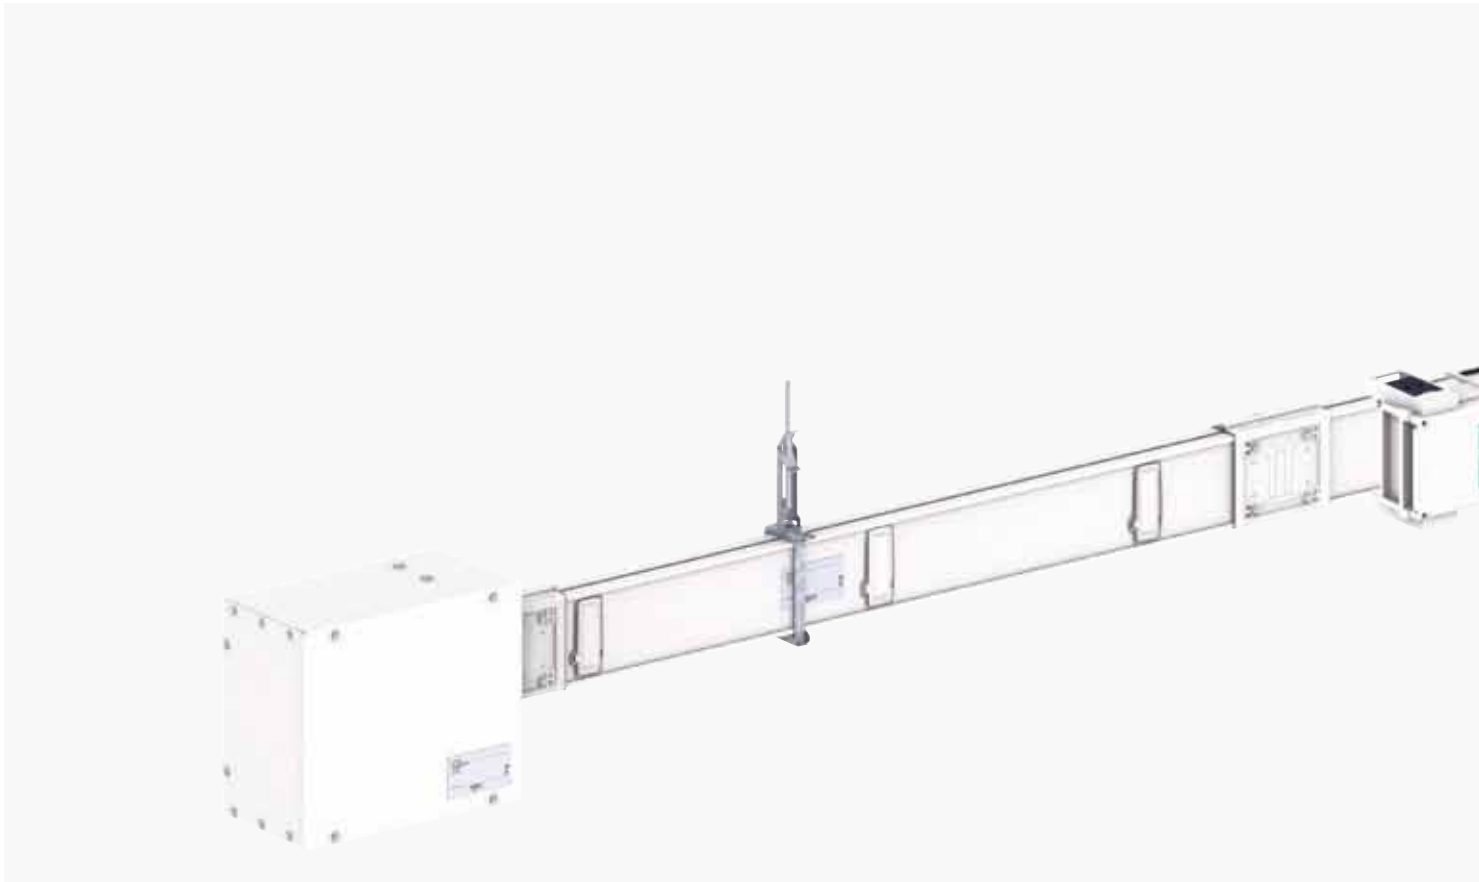

Excellent contact

Contacts are silver-plated.
The level of performance remains the same
throughout the life of the product.


PD202232W_eps



Light and easy to handle

Canalis trunking is light and easy to
handle due to the use of aluminium
conductors.
For equal power ratings, trunking
equipped with copper conductors is
40 % heavier.
The low weight of Canalis KS
simplifies installation and greatly
reduces the time required. Fewer
workers and resources are required,
whatever the type of installation.

DD200801_r_eps

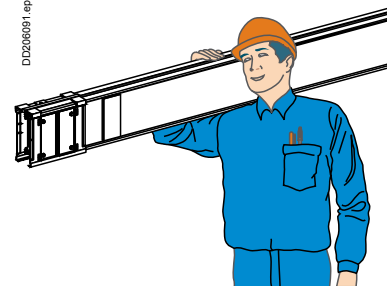

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

A high degree of protection

The high degree of protection for Canalis KS means it can be installed in all types of buildings.

- **IP55** guarantees trunking protection against splashes, and dust.
- **IK08** guarantees the strength of the trunking (resistance to shocks).
- **IPxxD** ensures totally safe working conditions for maintenance personnel.
- Canalis KS complies with **sprinkler tests**, guaranteeing operation under vertically and horizontally sprayed water for 50 minutes.


DD202142_eps



DD202144_eps



DD202143_eps

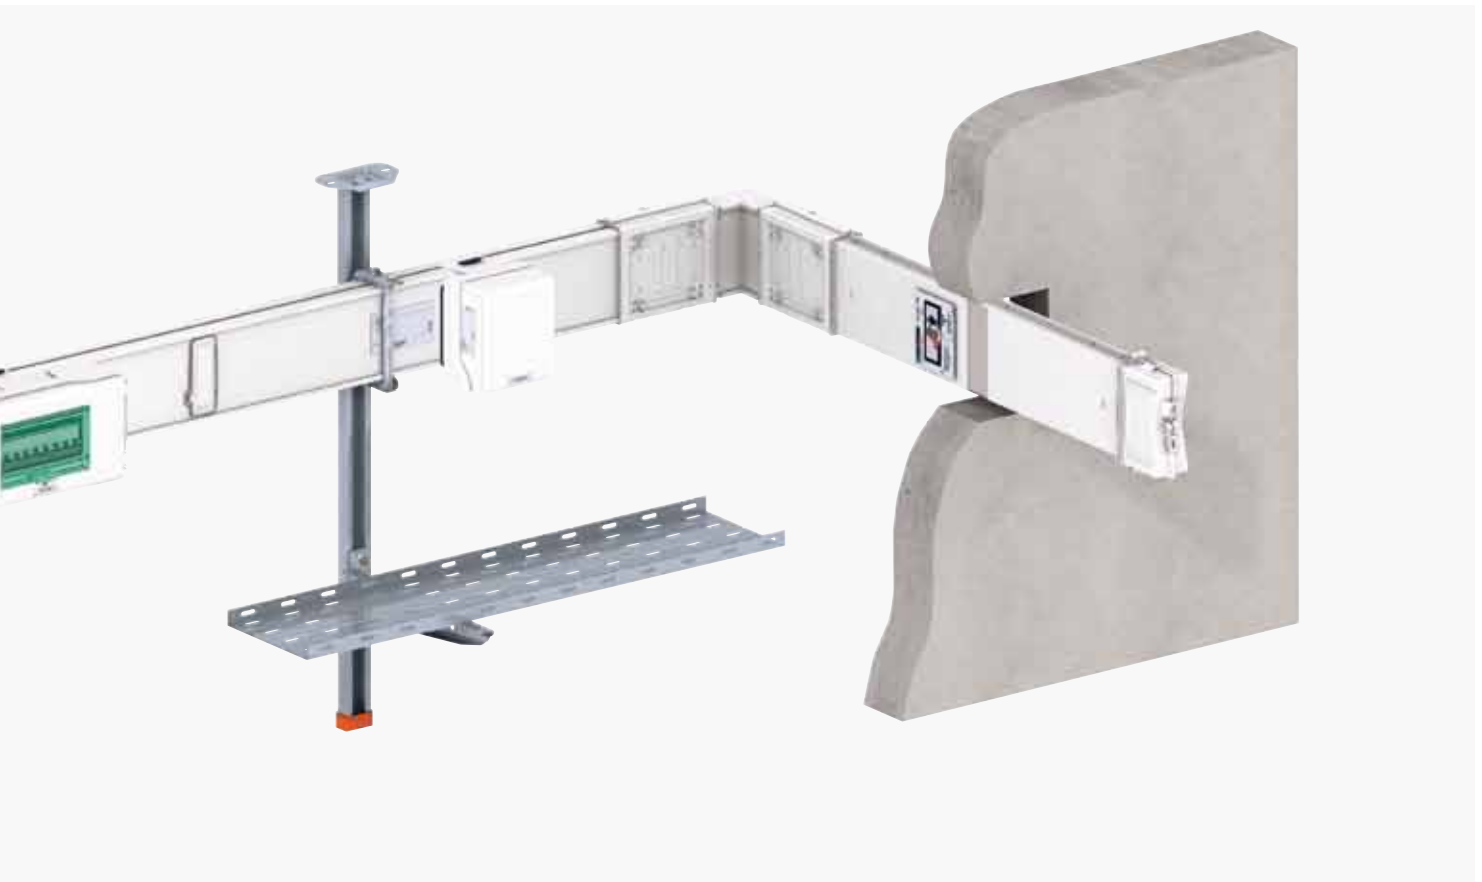


A complete range of tap-off units

- The range covers all needs from 25 to 400 A.
- Protection is possible using circuit breakers, fuses or surge arresters.
- Also available are 32 A tap-off units equipped with household and industrial power sockets.

Intelligent tap-off units

- They monitor the installation to avoid overloads and ensure continuity of service.
- They can meter the energy consumed for precise management (cost allocation for each consumer).

DD202176_eps

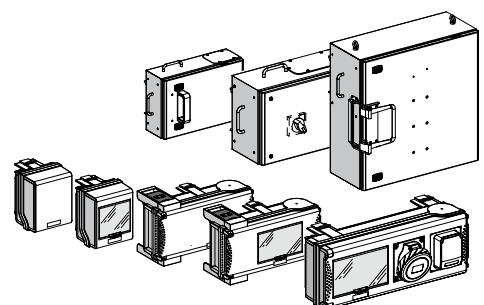

Description

IP55

U_e = 230...690 V

RAL 9001 white

Canalis KS, 100 to 1000 A

Medium-power distribution

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Canalis KS is designed for medium-power distribution with high tap-off densities in industrial and commercial buildings (factories, exhibition halls, supermarkets, etc.).

The range is available in eight ratings: 100, 160, 250, 400, 500, 630, 800 et 1000 A.

Canalis KS provides an IP55 degree of protection, whatever the installation method. Consequently it can be installed in virtually any type of building.

Tap-offs are implemented by tap-off units from 25 to 400 A that may be removed in complete safety under energised conditions, from 25 to 400 A.

Busbar trunking rated 100 to 400 A may be equipped with tap-off units up to 250 A.

Busbar trunking with higher ratings may be equipped with the entire range of tap-off units.


All the insulating and plastic materials are **halogen-free** and have enhanced fire-withstand capabilities.

- incandescent wire test as per standard IEC 60695-2:
- 960 °C for components in contact with live parts
- 650 °C for other components.

Straight lengths

Distribution components

DD205843.eps

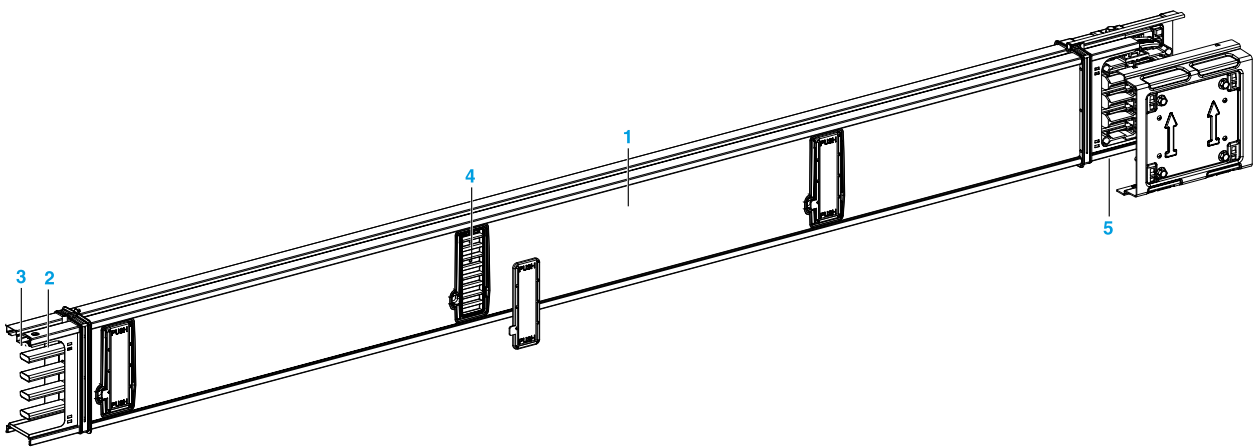

These components carry the current and supply loads up to 400 A. They constitute the basic structure of the line and are made up of:

- 1 a casing, crimp closed, made of hot-galvanised sheet steel**, pre-lacquered RAL 9001 white. This casing, shaped and ribbed by roller burnishing, provides excellent resistance to bending and twisting. Two sizes cover the entire range of ratings: 54 mm wide for the 100, 160, 250 and 400 A ratings and 113 mm wide for the 500, 630, 800 and 1000 A ratings, live conductors made up of four identically sized bars.
- 2 silver-plated aluminium/copper bimetal laminate for the 100 and 160 A ratings**, aluminium equipped with silver-plated aluminium/copper bimetal laminate contacts electrically welded at junctions and tap-off points for the 250 and 1000 A ratings.
- 3 a protective conductor (PE)** sized $\geq 50\%$ with respect to the cross-section of phases. It is connected to the casing at each junction.
- 4 tap-off outlets** every meter on both sides of the trunking.
- 5 a mechanical and electrical jointing system:** Electrical jointing is ensured by a block with flexible grip contacts made of silver-plated copper. This block equally absorbs the difference in conductor and casing thermal expansion for each length. For the 100 to 250 A ratings, it ensures automatic and simultaneous jointing of all live conductors and the continuity of the protective earth conductor, as well as its connection with the casing. For the 400 to 1000 A ratings, electrical jointing is ensured by a quarter-turn locking mechanism for each conductor.

Special components

1 Custom-length run components

Used to adjust the length of a line (e.g. between two changes in direction).

These components are made to order and do not have tap-off outlets.

2 Fire barrier


This type of length is used to transit a fire-proof wall (e.g. between two rooms in a building).

It has been tested in a certified laboratory and complies with standard EN 1363-1.

The laboratory report lists the following results:

- thermal insulation: ≥ 120 minutes,
- resistance to flames: ≥ 120 minutes,
- stability: ≥ 120 minutes.

DD205844.eps

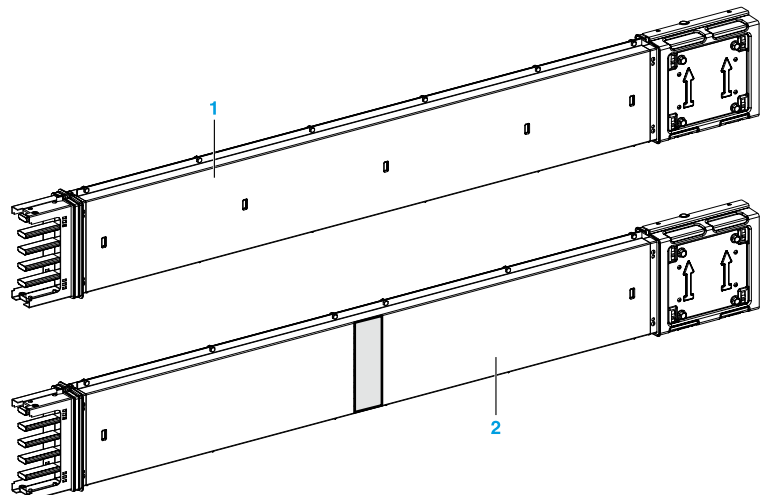

Feed units and end covers

Used to feed a KS line by cables or directly from the busbars in a switchboard. They can be mounted at the end of a line (end feed, left or right) or in the middle (central feed).

1 End feed unit for KS 100 A trunking

For KS 100 A trunking only. It can be mounted on either side of a straight length. It is equipped with a PG 29 cable gland and supplied with an end cover.

2 End feed unit for trunking up to 1000 A

For 250 to 400 A ratings. It can be mounted on either end of a straight length by inverting the initial section of the trunking, and supplied with an end cover. For 500 to 1000 A ratings, there are right and left-hand versions. With feed units from 400 to 1000 A, cable gland plates are in aluminium (reduction of Eddy current effects).

3 Centre feed unit


Using a single cable, it is possible to feed both the right and left-hand sections. It is mounted between two straight lengths in the line and is supplied with two end covers.

4 Flange feed unit

Equipped with splayed bars and a mounting plate for direct connection to the busbars of a switchboard. It can be mounted on either end of a component and is supplied with an end cover.

5 End cover

The end cover protects and isolates the ends of the conductors. It is mounted on the last component. Supplied with end feet unit and feed unit.

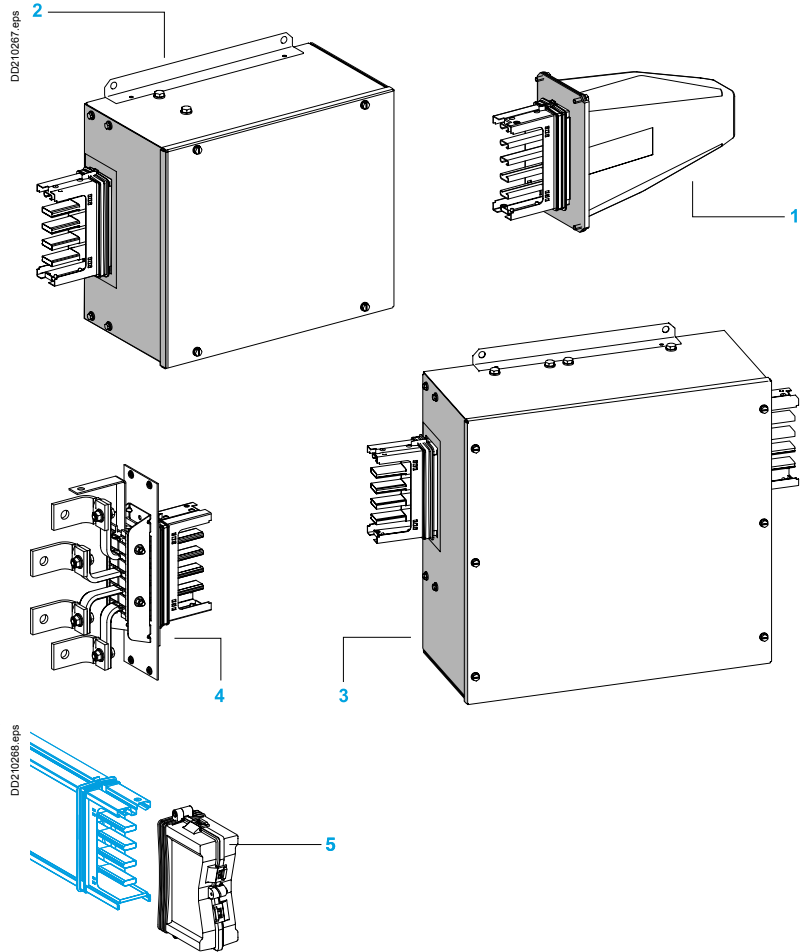

Components for changing direction

All components for changing direction are supplied with a junction block.

1 Edgewise elbow


One model for turning right or left.

2 Flat elbows

Two models, one for turning up and the other for turning down.


3 Edgewise tee

To create branches perpendicular to the main line.

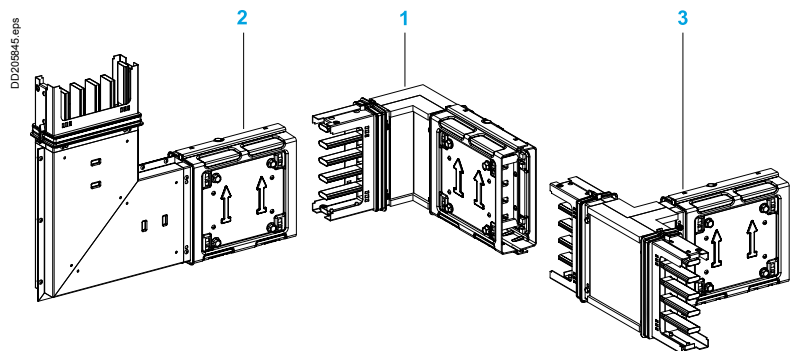

Sprinkler kit

To comply with the sprinkler tests (guaranteeing operation under vertically and horizontally sprayed water for 50 minutes), each electrical jointing system should be fitted with a reinforced protection kit (the jointing sleeve).

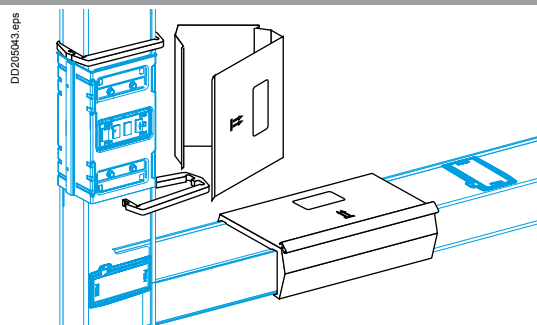

Description

IP55

U_e = 230...690 V

RAL 9001 white

Canalis KS, 100 to 1000 A

Medium-power distribution

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Fixing systems

The maximum recommended fixing distance is three metres.

1 Universal fixing bracket

For attachment of the busbar trunking to the structure of the building, either directly or via a threaded rod M8, brackets, etc. Suspension using chains or steel cables is not advised.

2 Pendant kit


The pendant kit includes:

- a perforated pendant used to suspend a KS line from the building structure, an IPN or the ceiling. Length: 1 meter
Width: 80 mm
- a cantilever arm that supports the cable tray under the KS line.
- the mounting hardware required to secure the KS bracket and the cantilever arm to the pendant.

Two kits are available:

- KS ratings up to 400 A: 200 mm cantilever arm
- KS ratings from 500 A to 1000 A: 300 mm cantilever arm.

If necessary, additional cantilever arms can be ordered.

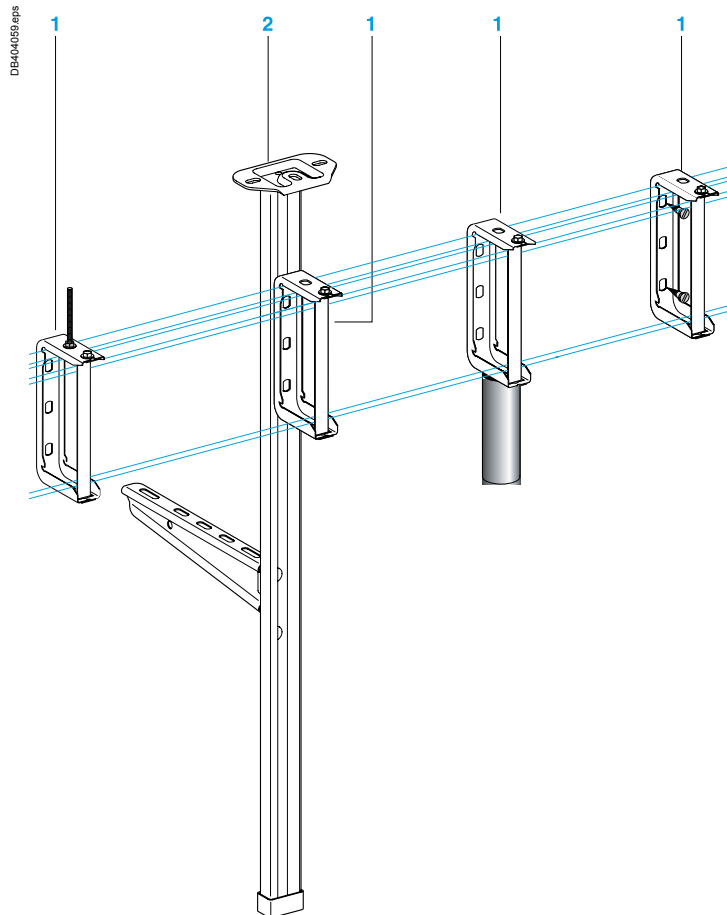

Tap-off units

For rapid connection of loads or secondary lines, in compliance with installation standards IEC 60364 and regulations, whatever the system earthing arrangement (TT, TNS, TNC or IT).


They can be handled and removed under off-load conditions with the trunking energised.

The tap-off outlets are automatically opened or closed when tap-off units are connected or removed.

With the cover open, no live parts are accessible.





The degree of protection is IPxxB (protected against access with a finger).

The degree of protection is IP55 as standard (no accessories are required).

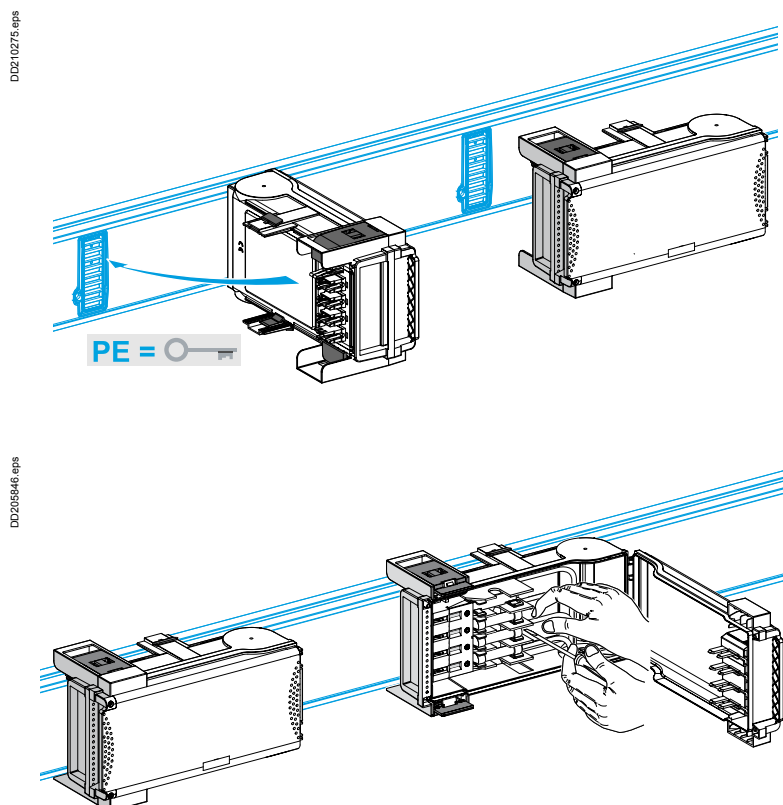


Tap-off units (A) and tap-off units with isolators (B) up to 100 A are made of plastic:

- Colour: RAL 9001 white for the casing and the grip zones and transparent green for the cover (design based on Kaedra enclosures), The fixing mechanisms are in RAL 7016
- Material: self-extinguishing, **halogen free** insulating plastic (fire resistant and very high temperature withstand).
- Other characteristics: cable gland drilling zone, stainless steel screws and the door can be lead sealed.




Tap-off units from 160 to 400 A are made of sheet steel (C):

- Colour: RAL 9001 white for the casing, RAL 9005 black for the grip zones (100% polyester paint)
- Materials: galvanised sheet steel
- 400 A tap-off units can be only installed on straight lengths ≥ 500 A.
- Other characteristics:
 - Removable cover with hinges enabling opening up to 120°, vertically bevelled cover with double bends for enhanced rigidity (design based on Sarel Spatial 3D enclosures), polyurethane gaskets.
 - Equipped with cable-gland plates marked every 25 mm and designed for maximum access.

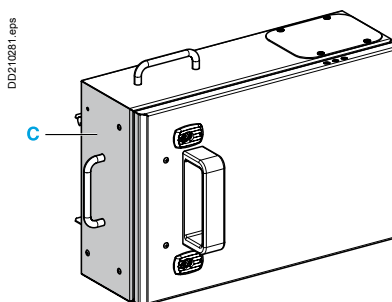

Disconnection principle

Disconnection by unplugging the tap-off unit. The access to the electrical devices and the terminals is possible only when the tap-off unit is unplugged (i.e. not energised). A safety device prevents connection to the trunking when the cover has been removed.



Disconnection of tap-off units with fuses and modular devices (category AC20) is obtained by opening the tap-unit cover.

Tap-off unit disconnection by opening or closing the cover should be carried out only if the downstream load is de-energised.

For tap-units with circuit breakers, a number of safety devices prevents from:

- Plugging and unplugging in the tap-off unit when the cover is closed
- Closing the cover before the tap-off unit is locked onto the trunking
- having access to the electrical equipment and the terminals when energised.
- opening the cover in the position "ON" (tap-off units equipped with a Compact NSX or NG circuit breaker).

These tap-off units can be equipped with certain accessories such as circuit-opening contacts on the cover, lead seals, etc.

Description

IP55

U_e = 230...690 V

RAL 9001 white

Canalis KS, 100 to 1000 A

Medium-power distribution

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com


Tap-off units for circuit-breakers (not equipped)

Tap-off unit covers can be lead sealed to prevent circuit-breaker switching by unauthorised persons.

Tap-off unit for modular devices

This tap-off unit can be equipped with most modular devices (18 mm wide) of the Multi 9 type:

- rated current: 32 A
- capacity: 5 modules
- with a window in front for visual and physical access to the devices. A transparent cover seals the window.




Tap-off units, with isolators, for modular devices

These tap-off units accept most modular devices of the Multi 9 type available in multiples of 18 mm wide modules. They have a window in front for visual and physical access to the devices. A transparent cover seals the window.

Two ratings are available:

- rated current 63 A for eight modules
- rated current 100 A for twelve modules (can accept C120 circuit breakers).

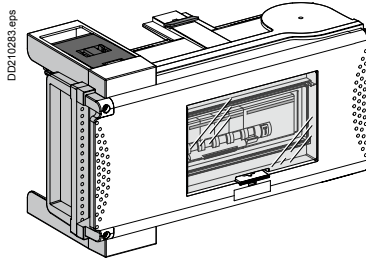


Tap-off units for NG type modular devices

These tap-off units are equipped with a DIN rail and upstream connections to accept modular devices available in multiples of 18 mm wide modules.

The devices are operated by rotary handles that prevent door opening with the circuit breaker in "On" position.

- rated current: 160 A
- capacity: 13 modules (accepts NG125 or NG160 devices equipped with Vigi modules).



Tap-off units, with isolators, for Compact NSX circuit breaker

These tap-off units are equipped with mounting plates and upstream connections for Compact NSX circuit breakers:

- rated current: 100 to 400 A, N, H or L versions
 - fixed, front connection, rotary handle
 - For Compact NSX + Vigi module, use Tap-off units for measurements and metering (see below)
- 400 A tap-off units can be only installed on straight lengths > 400 A.

Note: For options such as withdrawable circuit breakers, earth-leakage protection, etc, call your Schneider Electric contact.

Tap-off units for measurements and metering (not equipped)


Tap-off units, with isolators, for measurements and metering

These tap-off units are used for sub-billing or monitoring of secondary lines. The values measured by the TI module of the Compact NSX are transmitted to the power-monitoring unit that forwards the information to a central unit via a bus. (see Special measurement and metering applications)

They are equipped with:

- a mounting plate for a Compact NSX type circuit breaker with an extended rotary handle and a Compact NSX current transformer module
- a DIN rail for installation of a Powerlogic PM810, a set of terminals, etc.

Under severe operating conditions (> 40 °C ambient temperature), we recommend using a PM810 without a display.

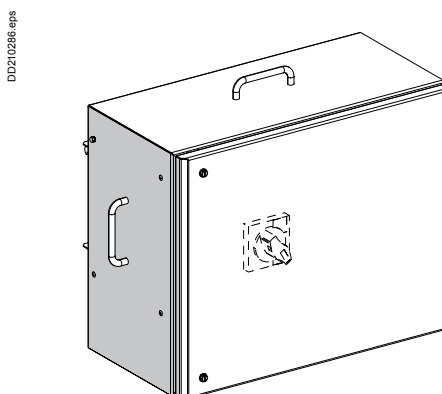

Tap-off units for power sockets (not equipped)

Tap-off unit covers can be lead sealed to prevent circuit-breaker switching by unauthorised persons.

Canalis 32 A tap-off unit for power sockets

For the supply of portable loads equipped with household or industrial plugs in a garage, maintenance workshop, laboratory, battery charging room, etc
For installation on trunking mounted on a wall for better access.

For easy access, install on trunking mounted at an appropriate height on the wall.

Flexibility, upgradeability: positioned as close as possible to the loads, extension leads are not required

Degree of protection: IP55, IK08.

Safety of persons: IPxxB, earth-leakage protection.


Rated current: 32 A

Capacity: 8 modules in multiples of 18 mm wide


Two versions are available:

- pre-equipped with 2 PK or PratiKa power sockets
- customisable:
 - two 90 x 100 mm openings for PK-type (screw connections) or PratiKa (fast and reliable connection without stripping) industrial or household sockets.
 - direct mounting for industrial IEC 16 A 5P or IEC 32 A 3, 4 or 5P sockets.
 - mounting on a 65 x 85 mm clip-on adapter plate for industrial IEC 16 A 3P or 5P and household 10/16 A 2P + PE sockets.

DD210302.eps

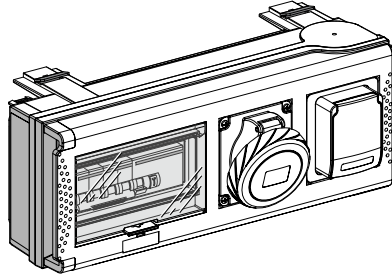

DD210459.eps

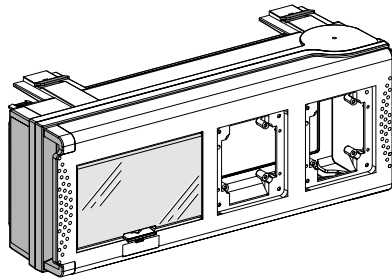

Description

IP55

U_e = 230...690 V

RAL 9001 white

Canalis KS, 100 to 1000 A

Medium-power distribution

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com


Tap-off units for fuses (not equipped)

For protection of the tap-off by fuses (not supplied).

1 Tap-off unit with fuse holders

This tap-off unit exists in three versions:

- for NF 10 x 38 fuses
- for BS type 88 A1 fuses
- for DIN type Neozed E14 fuses.




2a and 2b Tap-off units, with isolator, for fuses

There are two types of tap-off units:

Plastic tap-off units (2a) equipped with fuse holders for:

- NF 50 to 100 A cylindrical fuses
- BS 32 to 80 A screw fuses
- DIN 25 to 63 A screw fuses
- 100 A blade-type fuses.


Sheet-metal tap-off units (2b) equipped with fuse holders for 160 to 400 A blade-type fuses.

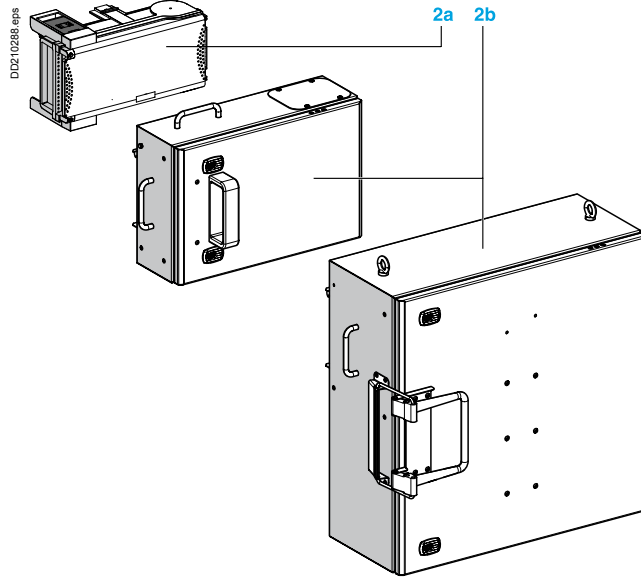

Tap-off units for switch-disconnector fuses

Sheet metal tap-off units equipped with mounting plates and upstream connection for Fupact INF switch-disconnectors with extended rotary handle:

- rated current 250 A to 400 A
- fixed, front connection.



Tap-off units (with and without isolators) equipped with a surge arrester


These tap-off units (with and without isolators) are pre-equipped with a modular Type 2 surge arrester, with integrated disconnection device.

2 versions of 3P + N protection are available, based on Quick PF10 or Quick PRD40r.

These units are ready for use, can be plugged directly into the busbar trunking and do not require any additional wiring.

They should be positioned at least 30 m upstream of each load to be protected.

Tap-off unit covers can be lead sealed to prevent the surge arrester being tampered with by unauthorised persons.

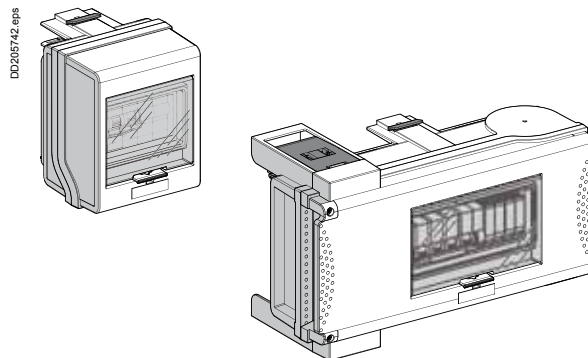


Compatibility of tap-off units and busbar trunkings

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com


The number of tap-off units presented below corresponds to an installation on a single side of the Canalis prefabricated busbar trunking system. This number is doubled for installations in which the tap-off units can be mounted on both sides.

Tap-off units with wander sockets


KSB32CM55⁽¹⁾ 5 modules




KSB63SM•8⁽¹⁾ 8 modules

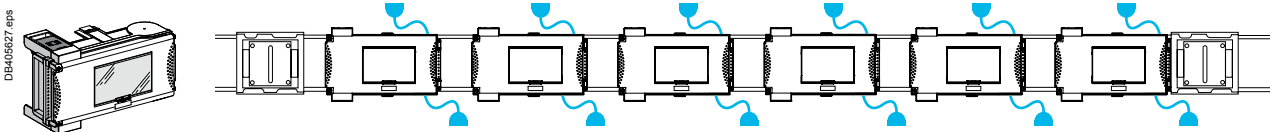

KSB100SM•12⁽¹⁾ 12 modules

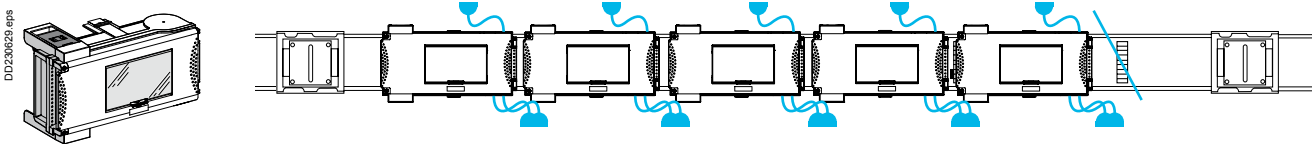


KSB160SM•24⁽¹⁾ 24 modules

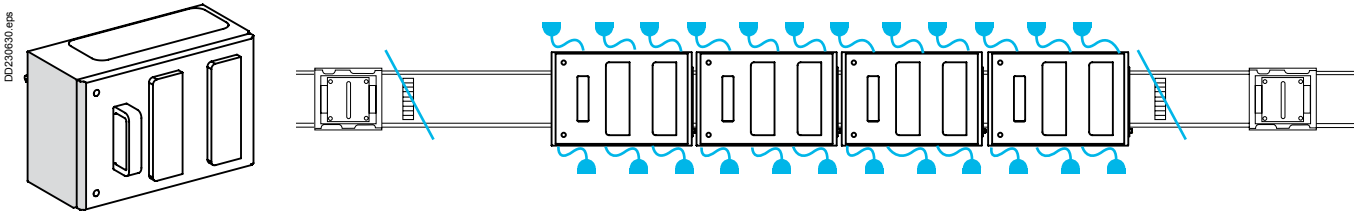



Tap-off units with panel mountings

KSB32CP⁽¹⁾ 8 modules

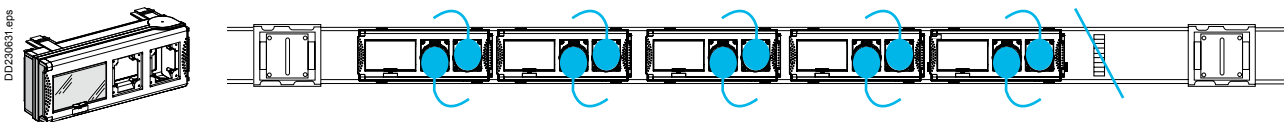

KSB160SM•24⁽¹⁾ 24 modules

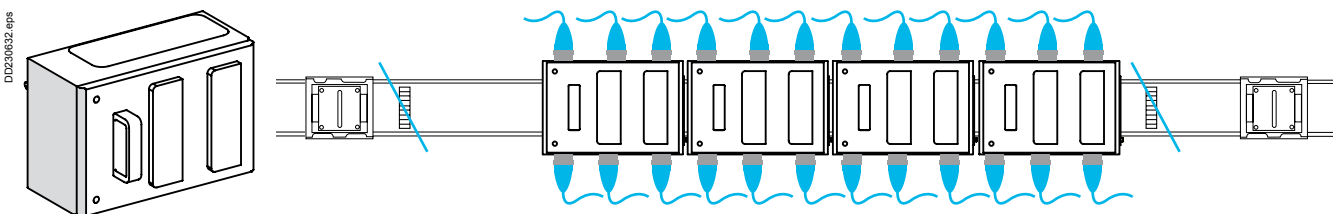

 : Outlets not usable for this type of tap-off.

Compatibility of tap-off units and busbar trunkings

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Rising mains for 2 m or 2.5 m length


From 100 to 400 A

From 500 to 800 A


Tap-off outlets usable for the tap-off units from 16 to 125 A

Tap-off outlets usable for the tap-off units from 16 to 400 A

DB416224 eps

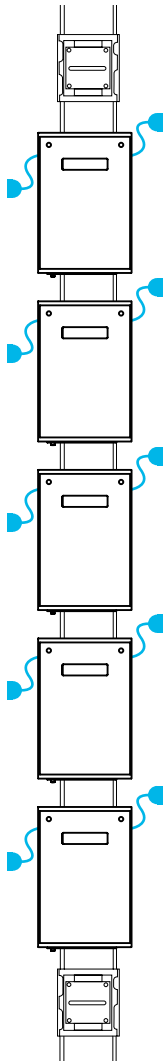

DB416226 eps

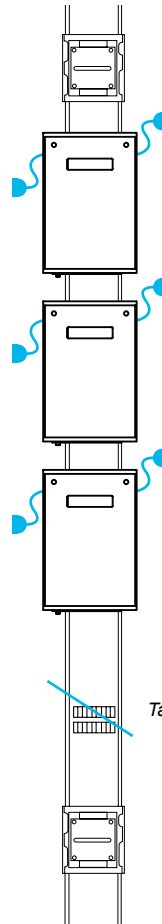

Tap-off outlet not usable for KSB400D tap-off units.

Catalogue numbers Dimensions

IP55

U_e = 230...690 V

RAL 9001 white

Canalis KS, 100 to 1000 A Busbar trunking for medium-power distribution

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Run components for horizontal sections

Catalogue numbers


Transport lengths

Rating (A)	400	
Length Dim. B (mm)	3000	5000
Weight (kg)	18.80	30.00
Cat. no.	KSA400ET430	KSA400ET450


Custom-length transport lengths

Rating (A)	400
Weight (kg)	9.50
Cat. no.	KSA400ET4A


Dimensions



KSA400ET430



KSA400ET450



500 ≤ l ≤ 1995 mm

KSA400ET4A

Catalogue numbers

Transport lengths


Rating (A)	500		630		800		1000	
Length (mm)	3000	5000	3000	5000	3000	5000	3000	5000
Weight (kg)	33.10	51.50	34.60	55.20	41.30	66.20	53.40	86.50
Cat. no.	KSA500ET430	KSA500ET450	KSA630ET430	KSA630ET450	KSA800ET430	KSA800ET450	KSA1000ET430	KSA1000ET450



DD421029


Custom-length transport lengths

Rating (A)	500 to 630	800 to 1000
Length (mm)	500 to 1995	500 to 1995
Weight (kg)	17.40	23.60
Cat. no.	KSA630ET4A	KSA1000ET4A



DD421030


Dimensions



KSA...ET430



KSA...ET450



KSA...ET4A

Catalogue numbers
Dimensions

IP55
Ue = 230...690 V
RAL 9001 white

Canalis KS, 100 to 400 A

Busbar trunking for medium-power distribution


Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Straight lengths with tap-off outlets

Catalogue numbers

DD202743_Reps

For connection to an old line, use the special adaptaters. See complementary products.

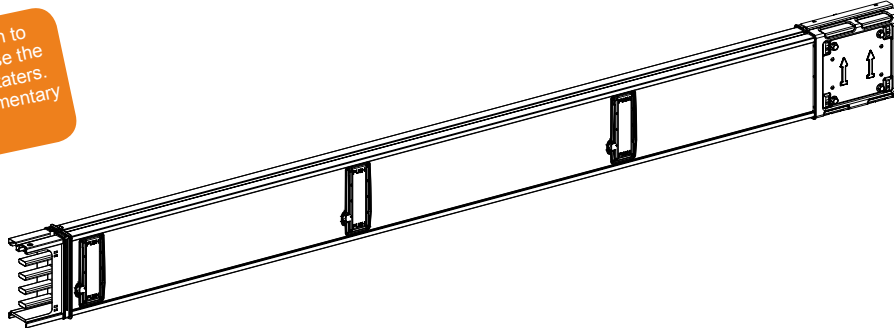


Standard lengths

Polarity	3L + N + PE or 3L + PEN							
Rating (A)	100		160		250		400	
Length (mm)	5000	3000	5000	3000	5000	3000	5000	3000
Number of tap-off outlets	10	6	10	6	10	6	10	6
Weight (kg)	19.20	12.10	21.40	13.40	25.20	15.70	32.85	20.40
Cat. no.	KSA100ED45010	KSA100ED4306	KSA160ED45010	KSA160ED4306	KSA250ED45010	KSA250ED4306	KSA400ED45010	KSA400ED4306


Other lengths

Polarity	3L + N + PE or 3L + PEN			
Rating (A)	100 to 250		400	
Length (mm)	2000		1500	
Number of tap-off outlets	8		6	
Weight (kg)	10.85		8.55	
Cat. no.	KSA250ED4208		KSA250ED4156	
			KSA400ED4208	
			KSA400ED4156	


Dimensions

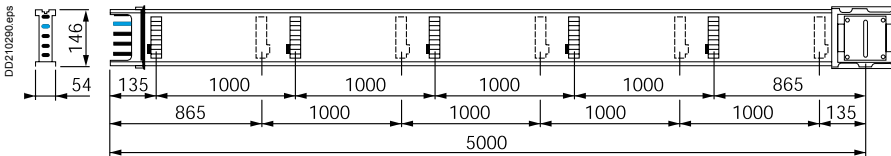


KSA●●●ED45010

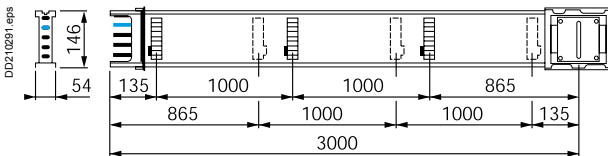

KSA●●●ED4306

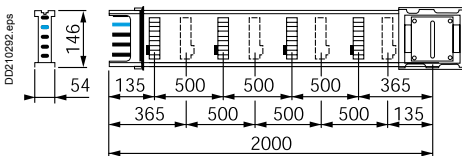


KSA●●●ED4208

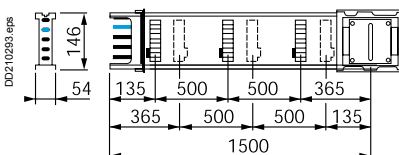

KSA●●●ED4156



DD202179_eps



Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com


Feed units (supplied with end cover)

Catalogue numbers





Designation	End feed unit		
Rating (A)	100	100 to 250	400
Mounting	Right or left	Right or left	Right or left
Connection	Terminals	Lugs (M10 screws)	Lugs (M10 screws)
Max. size (mm²)			
Flexible or rigid	5 x 16	240	1 x 300 or 2 x 120
Weight (kg)	1.85	7.20	8.80
Cat. no.	KSA100AB4	KSA250AB4	KSA400AB4

Dimensions

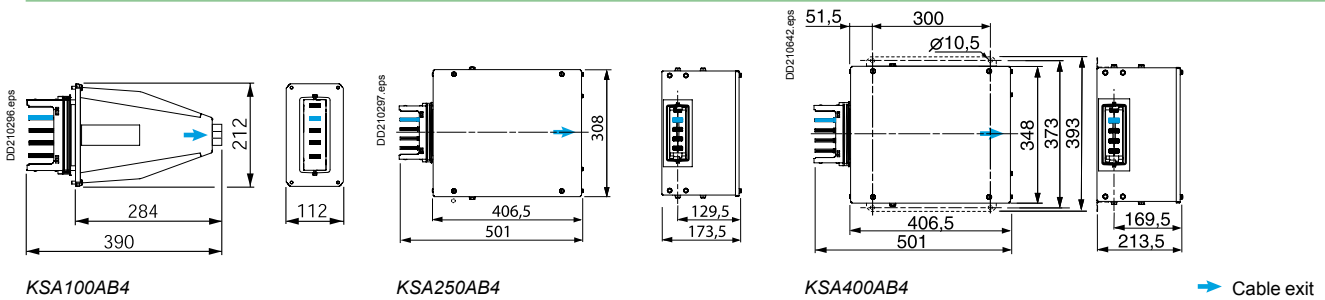

Fixing system

Catalogue numbers




Designation	Fixing bracket ⁽¹⁾ , standard element	Fixing bracket ⁽¹⁾ , custom-made element
Rating (A)	100 to 400	
Max. load (kg)	70	
Mounting	Wall or suspended on threaded rod	Floor
Order in multiples of	10	
Weight (kg)	0.3	0.7
Cat. no.	KSB400ZF1⁽²⁾	KSA80EZ5⁽²⁾

(1) Maximum recommended distance between fixings: 3 meters.

(2) Flat installation: Max. distance between fixings: 2 meters.

Dimensions



Catalogue numbers

Dimensions

IP55

Ue = 230...690 V

RAL 9001 white

Canalis KS, 100 to 400 A

Busbar trunking for medium-power distribution


Complementary products

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Special straight lengths without tap-off outlets

Catalogue numbers


DD20574e.eps

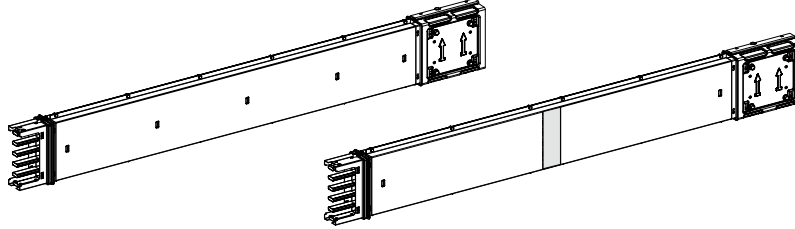

Polarity	3L + N + PE or 3L + PEN			
Rating (A)	100 to 250		400	
Length (mm)	500 to 1995	900 to 2200	500 to 1995	900 to 2200
Option	-	With fire barrier	-	With fire barrier
Weight (kg/m)	8	8.4	9.5	9.9
Cat. no.	KSA250ET4A	KSA250ET4AF	KSA400ET4A	KSA400ET4AF

Dimensions

DD210303.eps




KSA●●●ET4A

KSA●●●ET4AF


Dim.	ET4A	ET4AF
l	500 to 1995	900 to 2200
x		450 to 1750

Feed units (supplied with end cover)

Catalogue numbers



DD20574e.eps




DD210306.eps

Designation	Centre feed unit		Flange feed unit	
Rating (A)	100 to 250	400	100 to 250	400
Mounting	Central		Left or right	Left or right
Connection	Lugs (M10)		Lugs (M10)	Bars (M10 screws)
Max. size (mm²)	Flexible	240	2 x 240	-
	Rigid	240	2 x 240	-
Weight (kg)		12.90	15.50	1.70
Weight (kg)				1.90
Cat. no.	KSA250ABT4	KSA400ABT4	KSA250AE4	KSA400AE4


Dimensions

DB416064.eps

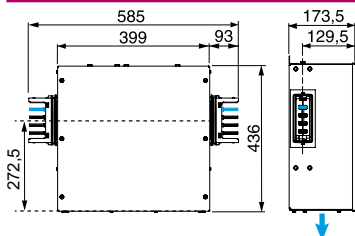

KSA250ABT4


DD230005.eps

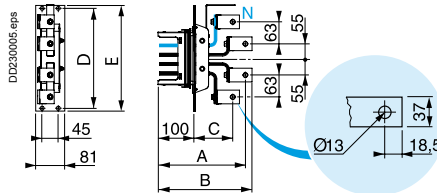

KSA●●●AE4

Dim.	100 to 250 A	400 A
A	243	261
B	261.5	279.50
C	108	117
D	278	318
E	294	334

DB416065.eps

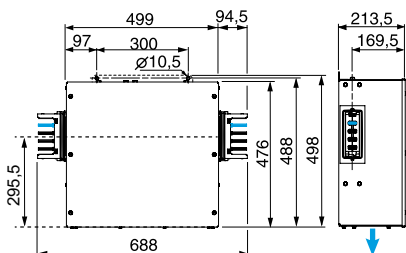


KSA400ABT4

→ Cable exit

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com


Components for changing direction

Catalogue numbers

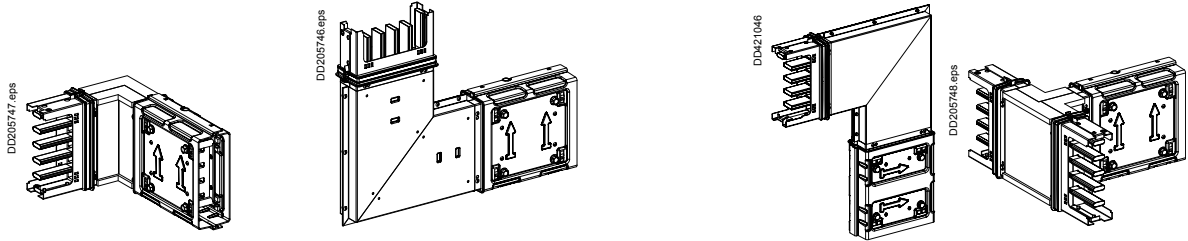


Designation	Coude				Tee			
Rating (A)	100 to 250	400	100 to 250	400	100 to 250	400	100 to 250	400
Direction (edgewise)	Right or left		Upward		Downward		Perpendicular	Perpendicular
Weight (kg)	3.15	3.80	5.00	5.60	5.00	5.60	4.30	5.20
Cat. no.	KSA250DLC40	KSA400DLC40	KSA250DLE40	KSA400DLE40	KSA250DLF40	KSA400DLF40	KSA250DTC40	KSA400DTC40


Dimensions




KSA...DLC40



KSA...DLE40



KSA...DLF40




KSA...DTC40


Fixing system

Catalogue numbers

DD210313.eps

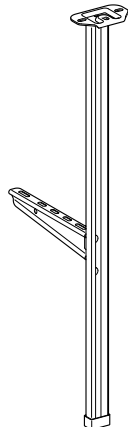

DD210317.eps




Designation	Pendant kit	Cantilever arm, 200 mm
Rating (A)	100 to 400	100 to 400
Max. load (kg)	80	220
Mounting	Under ceiling or I-beam ⁽¹⁾	Wall or pendant
Order in multiples of	4	4
Weight (kg)	2.70	0.60
Cat. no.	KSB400ZFKP1	KFBCA81200

(1) Maximum recommended distance between fixings: 3 meters.


Dimensions

DB403851.eps

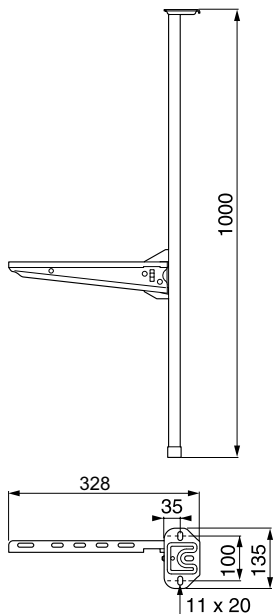

KSB400ZFKP1

DD22183.eps

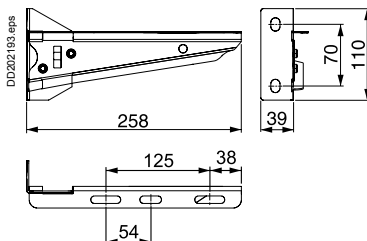



KFBCA81200

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Accessories





Catalogue numbers

Lead sealing kit





Rating (A)	All	
For	Feed unit cover and jointing screws	Tap-off outlets
Order in multiples of	20	20
Weight (kg)	0.0035	0.002
Cat. no.	KSB1000ZP1	KSB1000ZP2

Spare parts




Designation	Electrical and mechanical jointing unit		IP55 blanking plate	Sprinkler proofing accessory
Rating (A)	100 to 250	400	100 to 400	100 to 400
Order in multiples of	1	1	15	1
Weight (kg)	1.60	2.00	0.015	1
Cat. no.	KSA250ZJ4	KSA400ZJ4	KSB400ZB1	KSB400ZB2

Adaptaters for connection to old KS lines




Rating (A)	100 to 250	400
Weight (kg)	1.35	2.90
Cat. no.	KSA250FA4	KSA400FA4


Dimensions

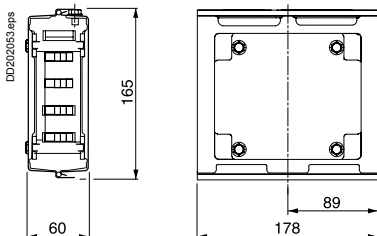


KSA250FA4



KSB400ZB2



KSA250FA4

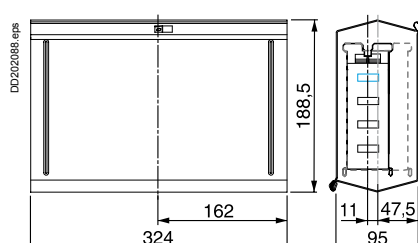

KSA400FA4

Catalogue numbers

Dimensions

IP55

Ue = 230...690 V

RAL 9001 white

Canalis KS, 500 to 630 A


Busbar trunking for medium-power distribution

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Straight lengths with tap-off outlets

Catalogue numbers

For connection to an old line, use the special adaptaters. See complementary products.

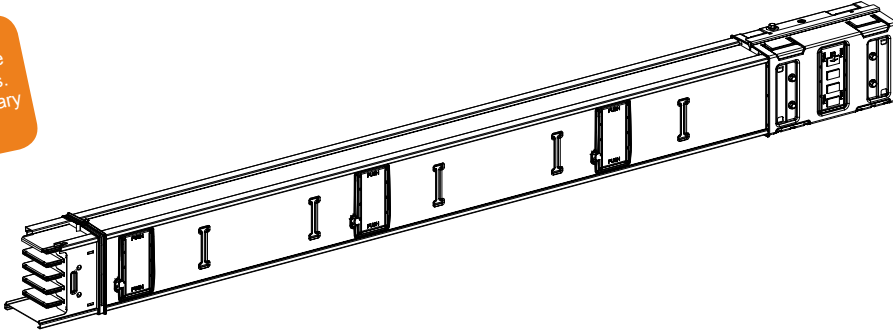


Standard lengths

Polarity	3L + N + PE or 3L + PEN			
Rating (A)	500		630	
Length (mm)	5000	3000	5000	3000
Number of tap-off outlets	10	6	10	6
Weight (kg)	54.50	34.90	58.20	36.40
Cat. no.	KSA500ED45010	KSA500ED4306	KSA630ED45010	KSA630ED4306


Additional lengths

Polarity	3L + N + PE or 3L + PEN	
Rating (A)	500 to 630	
Length (mm)	2000	1500
Number of tap-off outlets	6	4
Weight (kg)	26.00	20.50
Cat. no.	KSA630ED4206	KSA630ED4154


Dimensions

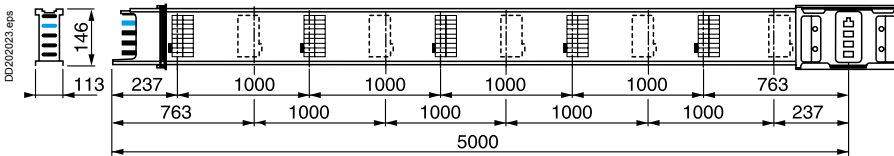


KSA ●●●ED45010

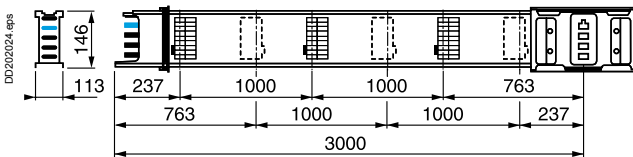


KSA ●●●ED4306

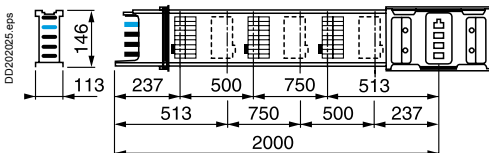

KSA630ED4206

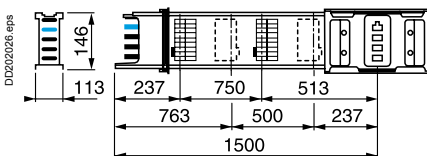


KSA630ED4154



Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com


Feed units (supplied with end cover)

Catalogue numbers



Designation	End feed unit	
Rating (A)	500 to 630	
Mounting	Right	Left
Connection	Lugs (M12 screws)	Lugs (M12 screws)
Max. size (mm²)		
Flexible or rigid	1 x 300 or 2 x 240	1 x 300 or 2 x 240
Weight (kg)	18.50	18.50
Cat. no.	KSA630ABD4	KSA630ABG4

Dimensions

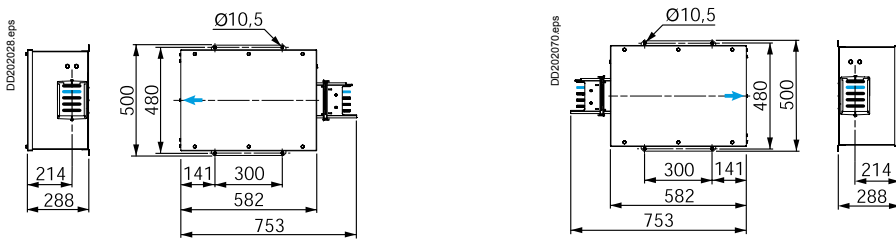

KSA630ABG4

→ Cable exit

KSA630ABD4

Fixing system


Catalogue numbers



Designation	Fixing bracket ⁽¹⁾
Rating (A)	500 to 1000
Max. load (kg)	135
Mounting	Wall or suspended on threaded rod
Order in multiples of	10
Weight (kg)	0.4
Cat. no.	KSB1000ZF1

⁽¹⁾ Maximum recommended distance between fixings: 3 meters.

Dimensions



KSB1000ZF1

Catalogue numbers

Dimensions

IP55

Ue = 230...690 V

RAL 9001 white

Canalis KS, 500 to 630 A

Busbar trunking medium-power distribution


Complementary products

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Special straight lengths without tap-off outlets

Catalogue numbers


DD20204F_eps

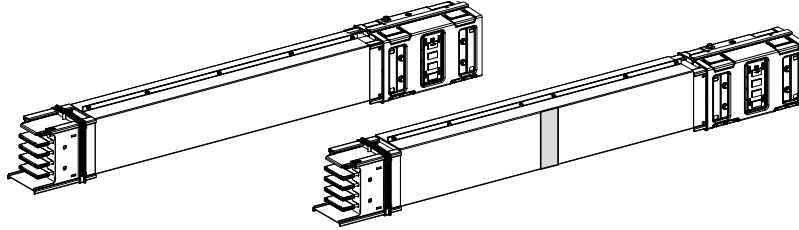


Polarity	3L + N + PE or 3L + PEN	
Rating (A)	500 to 630	900 to 2340
Length (mm)	500 to 1995	900 to 2340
Option	-	With fire barrier
Weight (kg/m)	17.4	18
Cat. no.	KSA630ET4A	KSA630ET4AF

Dimensions

DD20204E_eps



KSA630ET4A

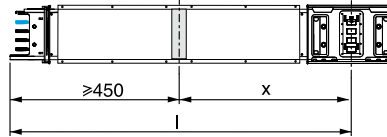


KSA630ET4AF


Dim.	ET4A	ET4AF
l	500 to 1995	900 to 2340
x	-	450 to 1890

Feed units (supplied with end cover)

Catalogue numbers



DD202051_eps




DD202050_eps

Designation	Centre feed box	Flange feed unit
Rating (A)	500 to 630	500 to 630
Mounting	Central	Left or right
Connection	Lugs (M12 screws)	Bars (2 x M10 screws)
Max. size (mm²)	Flexible 3 x 240 Rigid 3 x 300	-
Weight (kg)	30.50	4.70
Cat. no.	KSA630ABT4	KSA630AE4

Dimensions


DD202051_eps

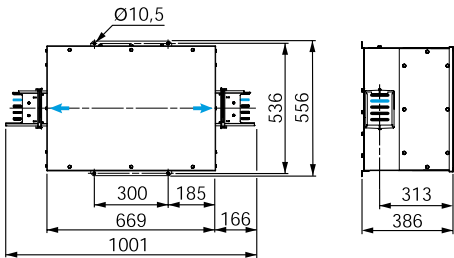

KSA630ABT4

➔ Cable exit

DD202052_eps

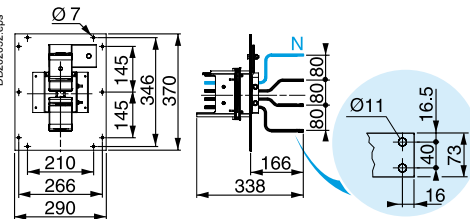


KSA630AE4

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com


Components for changing direction

Catalogue numbers

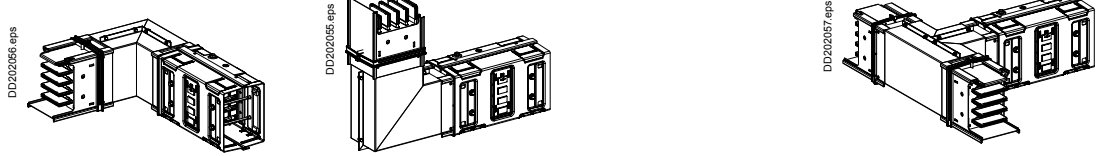


Designation	Elbow			Tee
Rating (A)	500 to 630			500 to 630
Direction (edgewise)	Right or left	Upward	Downward	Perpendicular
Weight (kg)	13.40	12.10	12.10	15.80
Cat. no.	KSA630DLC40	KSA630DLE40	KSA630DLF40	KSA630DTC40

Dimensions

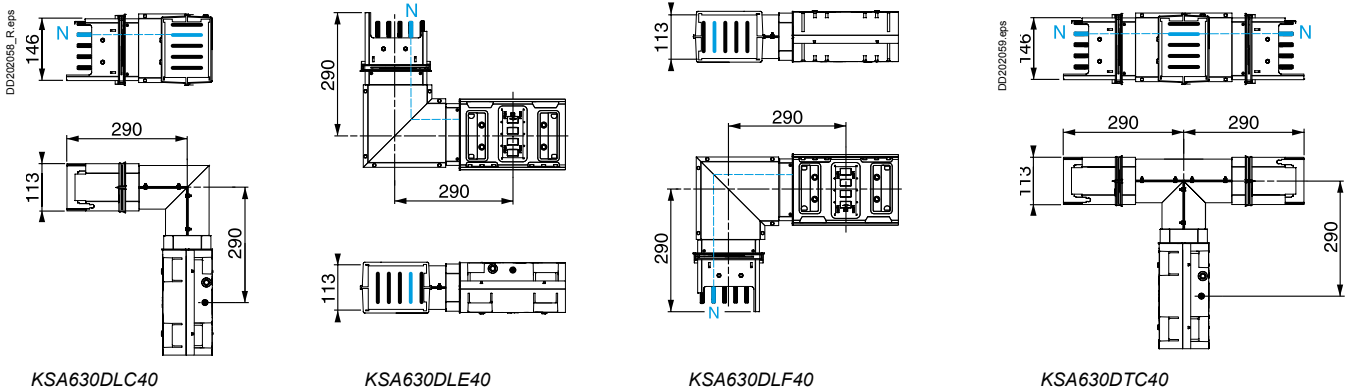

Fixing system


Catalogue numbers

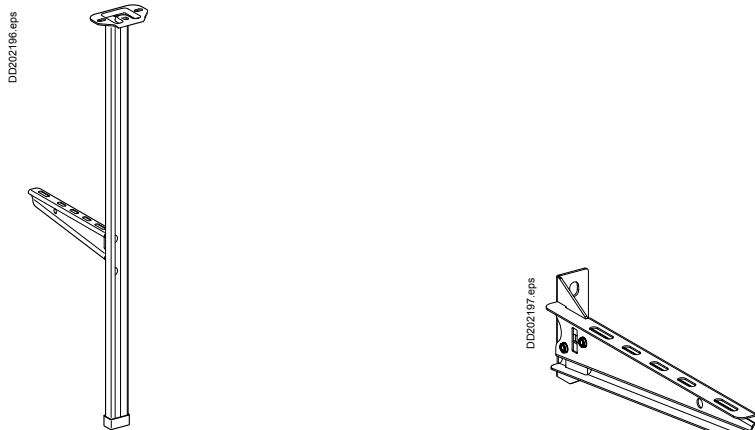

Designation	Pendant kit	Cantilever arm, 300 mm
Rating (A)	500 to 630	500 to 630
Max. load (kg)	80	200
Mounting	Under ceiling or I-beam ⁽¹⁾	Wall or pendant
Weight (kg)	2.80	0.60
Cat. no.	KSB1000ZFKP1	KFBCA81300

⁽¹⁾ Maximum recommended distance between fixings: 3 meters.



Dimensions

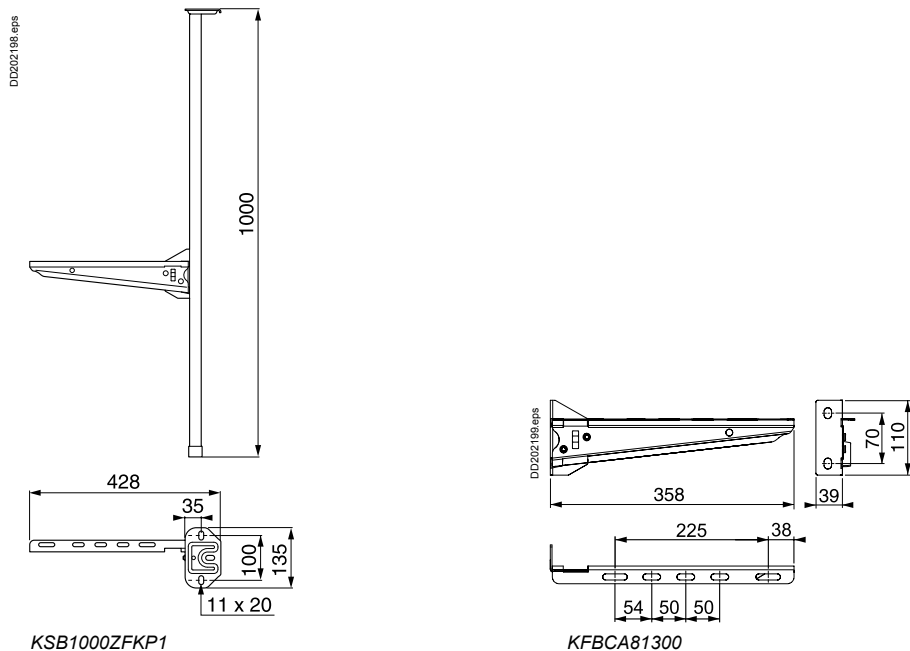

Accessories




Catalogue numbers

Sealing kit




Rating (A)	All	
For	Feed unit cover and jointing screws	Tap-off outlets
Order in multiples of	20	20
Weight (kg)	0.07	0.04
Cat. no.	KSB1000ZP1	KSB1000ZP2

Spare parts




Designation	Electrical and mechanical jointing unit	IP55 outlet plug	Sprinkler proofing accessory
Rating (A)	500 to 630	500 to 1000	500 to 1000
Order in multiples of	1	15	1
Weight (kg)	3.50	0.020	1
Cat. no.	KSA630ZJ4	KSB1000ZB1	KSB1000ZB2

Adaptaters




Rating (A)	500	630
For	Connection to old KS 500 A lines	Connection to old KS 630 A lines
Weight (kg)	3.65	4.00
Cat. no.	KSA500FA4	KSA800FA4


Dimensions

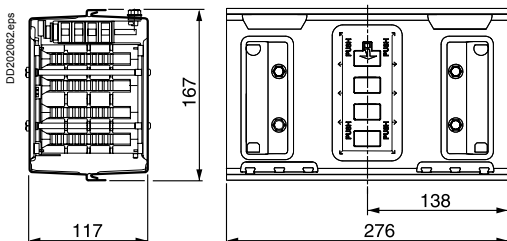

KSA630ZJ4

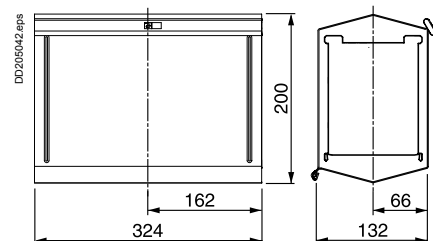

KSB1000ZB2

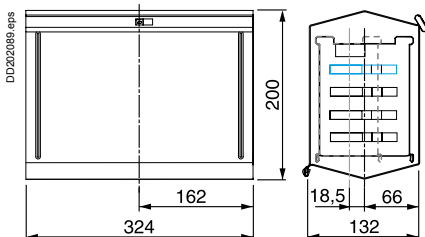

KSA...FA4

Catalogue numbers

Dimensions

IP55

Ue = 230...690 V

RAL 9001 white

Canalis KS, 800 to 1000 A

Busbar trunking medium-power distribution


Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Straight lengths with tap-off outlets

Catalogue numbers

DD202022_F.eps

For connection to an old line, use the special adapters. See complementary products.

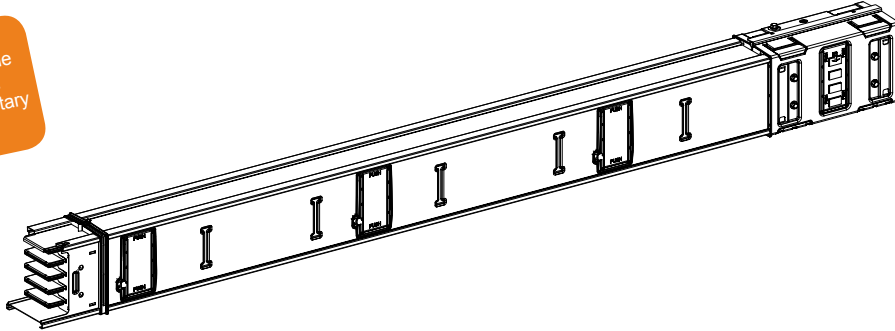

Standard lengths


Polarity	3L + N + PE or 3L + PEN			
Rating (A)	800		1000	
Length (mm)	5000	3000	5000	3000
Number of tap-off outlets	10	6	10	6
Weight (kg)	69.20	43.10	89.50	55.20
Cat. no.	KSA800ED45010	KSA800ED4306	KSA1000ED45010	KSA1000ED4306

Additional lengths

Polarity	3L + N + PE or 3L + PEN	
Rating (A)	800 to 1000	
Length (mm)	2000	1500
Number of tap-off outlets	6	4
Weight (kg)	38.50	29.90
Cat. no.	KSA1000ED4206	KSA1000ED4154


Dimensions

DD202023.eps

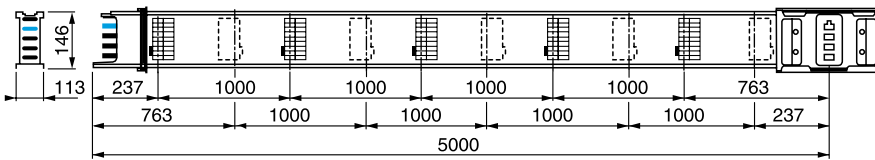


KSA ●●●ED45010

DD202024.eps

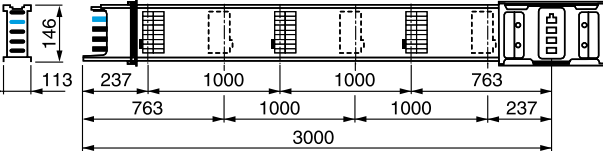


KSA ●●●ED4306

DD202025.eps

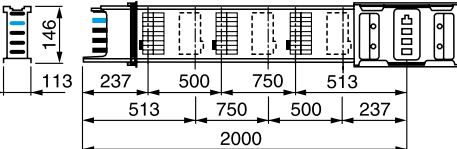


KSA1000ED4206

DD202026.eps

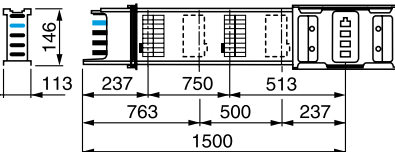

KSA1000ED4154



DD210638.eps



Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com


Feed units (supplied with end cover)

Catalogue numbers




Designation	End feed box	
Rating (A)	800 to 1000	
Mounting	Right	Left
Connection	Lugs (M12 screws)	
Max. size (mm²)	Flexible	4 x 240
	or rigid	4 x 300
Weight (kg)	24.50	
Cat. no.	KSA1000ABD4	KSA1000ABG4

Dimensions

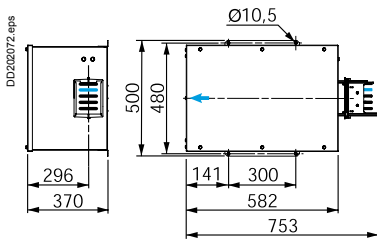

KSA1000ABG4


→ Cable exit

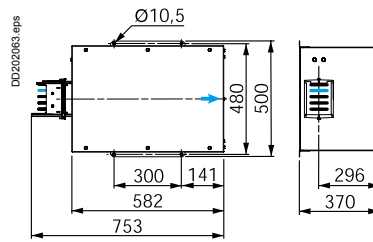

KSA1000ABD4

Fixing system


Catalogue numbers



Designation	Fixing bracket ⁽¹⁾
Rating (A)	500 to 1000
Max. load (kg)	135
Mounting	Wall or suspended on threaded rod
Order in multiples of	10
Weight (kg)	0.4
Cat. no.	KSB1000ZF1

(1) Maximum recommended distance between fixings: 3 meters.

Dimensions



KSB1000ZF1

Catalogue numbers

Dimensions

IP55

Ue = 230...690 V

RAL 9001 white

Canalis KS, 800 to 1000 A

Busbar trunking medium-power distribution


Complementary products

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Special straight lengths without tap-off outlets

Catalogue numbers




DD20204F.eps

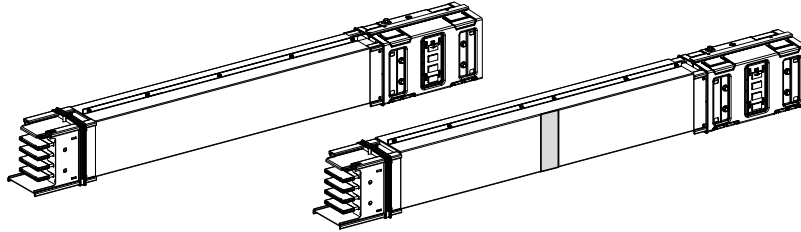

Polarity	3L + N + PE or 3L + PEN	
Rating (A)	800 to 1000	
Length (mm)	500 to 1995	900 to 2340
Option	- With fire barrier	
Weight (kg/m)	23.6	24.2
Cat. no.	KSA1000ET4A	KSA1000ET4AF

Dimensions

DD20204B.eps

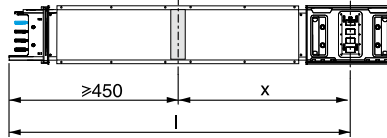

KSA1000ET4A


KSA1000ET4AF

Dim.	ET4A	ET4AF
l	500 to 1995	900 to 2340
x		450 to 1890


Feed units (supplied with end cover)

Catalogue numbers

DD2100B




DD202050.eps



Designation	Centre feed box	Flange feed unit
Rating (A)	800 to 1000	800 to 1000
Mounting	Central	Left or right
Connection	Lugs (M12 screws)	Bars (4 x M10 screws)
Max. size (mm²)	Flexible 4 x 240 Rigid 4 x 300	-
Weight (kg)	41.50	6.60
Cat. no.	KSA1000ABT4	KSA1000AE4

Dimensions


DD202064.eps

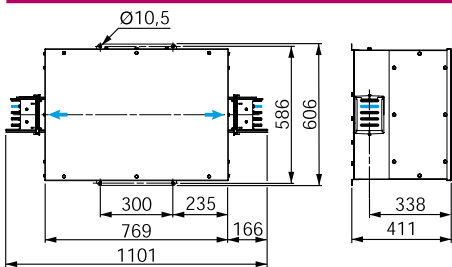

KSA1000ABT4

→ Cable exit

DD202065.eps

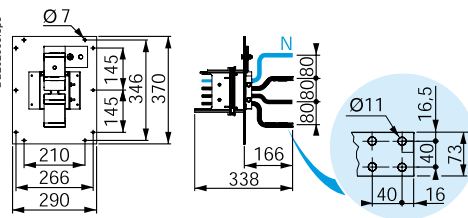


KSA1000AE4

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com


Components for changing direction

Catalogue numbers

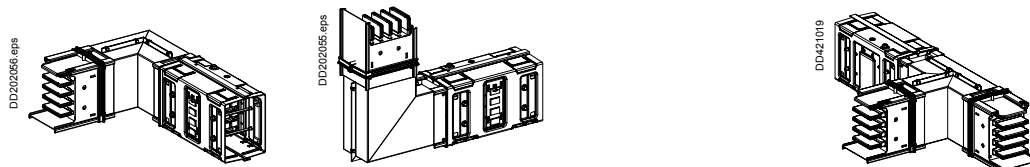

Designation	Elbow		Tee	
Rating (A)	800 to 1000		800 to 1000	
Direction (edgewise)	Right or left	Upward	Downward	Perpendicular
Weight (kg)	19.00	16.70	16.70	22.60
Cat. no.	KSA1000DLC40	KSA1000DLE40	KSA1000DLF40	KSA1000DTC40


Dimensions

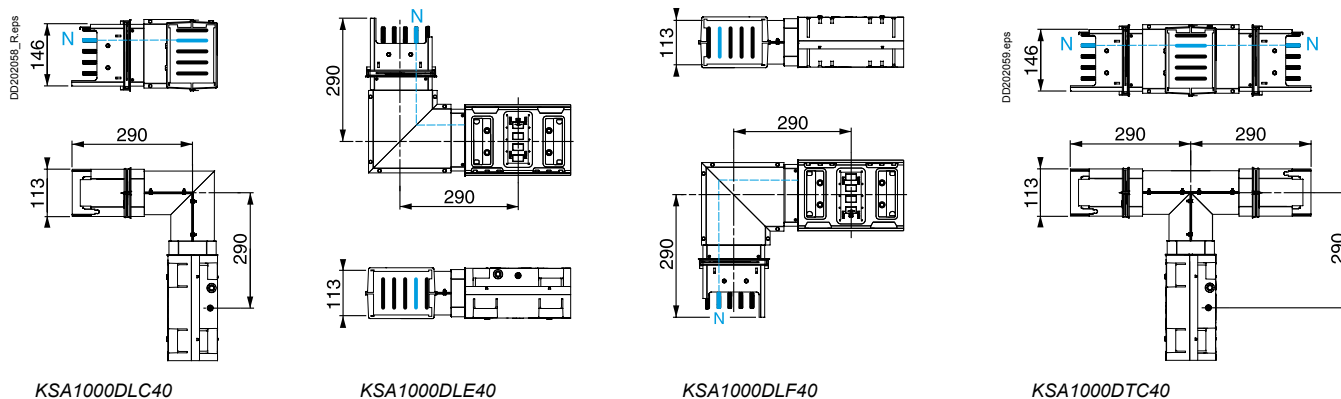


Fixing system

Catalogue numbers

DD202196.eps

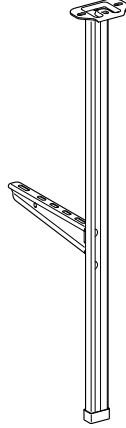

DD202197.eps




Designation	Pendant kit ⁽¹⁾	Cantilever arm, 300 mm
Rating (A)	800 to 1000	800 to 1000
Max. load (kg)	80	200
Mounting	Under ceiling or I-beam	Wall or pendant ⁽¹⁾
Order in multiple of	4	4
Weight (kg)	2.80	0.60
Cat. no.	KSB1000ZFKP1	KFBCA81300


⁽¹⁾ Maximum recommended distance between fixings: 3 meters.

Dimensions

DD202196.eps

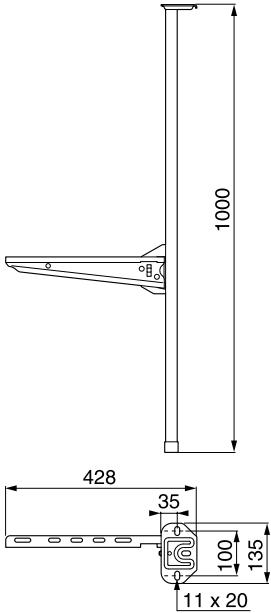

KSB1000ZFKP1

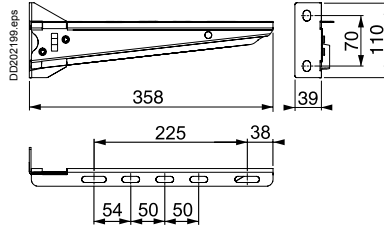



KFBCA81300

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Accessories




Catalogue numbers

Lead sealing kit




Rating (A)	All	
For	Feed unit cover and jointing screws	Tap-off outlets
Order in multiples of	20	20
Weight (kg)	0.07	0.04
Cat. no.	KSB1000ZP1	KSB1000ZP2

Spare parts




Designation	Electrical and mechanical jointing unit	IP55 outlet plug	Sprinkler proofing accessory
Rating (A)	800 to 1000	500 to 1000	500 to 1000
Order in multiples of	1	15	1
Weight (kg)	4.50	0.020	1
Cat. no.	KSA1000ZJ4	KSB1000ZB1	KSB1000ZB2

Adaptaters




Rating (A)	800
For	Connection to old KS lines
Weight (kg)	4.00
Cat. no.	KSA800FA4


Dimensions

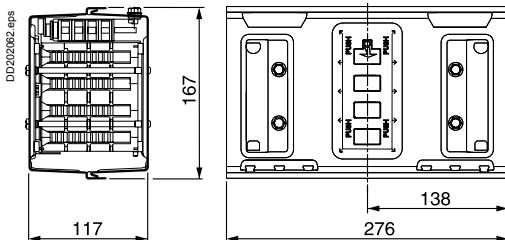

KSA1000ZJ4

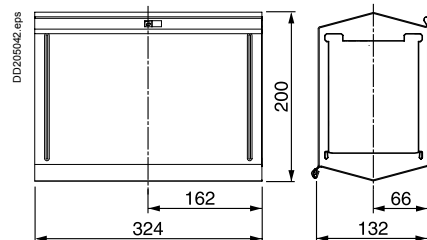

KSB1000ZB2

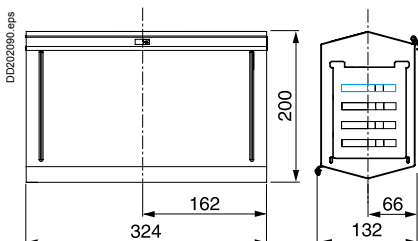

KSA800FA4

Catalogue numbers

Dimensions

IP55

U_e = 230...690 V

RAL 9001 white

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Canalis KS, 100 to 1000 A

Busbar trunking for medium-power distribution


32 to 100 A tap-off units for modular devices

Tap-off units

Disconnection by unplugging the tap-off unit


Catalogue numbers

Earthing system arrangement	Busbar trunking	TT - TNS - TNC - IT ⁽¹⁾
	Tap-off unit	TT - TNS - TNS - IT ⁽¹⁾



Tap-off polarity 3L + N + PE ⁽²⁾

E.g. circuit-breaker protection



Rating (A) 32

Number of 18 mm modules ⁽³⁾ (not supplied) 5

Connection Pre-wired

Max. size (mm²) Flexible 6

Rigid 10

Cable gland ⁽⁴⁾ (not supplied) ISO 32 max.

Weight (kg) 0.60

Cat. no. KSB32CM55


⁽¹⁾ The neutral must be protected or not distributed (3L + PE) for the IT system.

⁽³⁾ Supplied with blanking plate (1 x 5 divisible).

⁽²⁾ Also suitable for tap-off unit 3L + PE (N not distributed, IT system also possible).

⁽⁴⁾ Maximum diameter for a multipolar cable.

Dimensions



KSB32CM55


→ Cable exit
 - - - Centre line of tap-off outlets
 (5) Protruding.

Tap-off unit with isolator

Disconnection by opening the tap-off unit cover



Catalogue numbers

Earthing system arrangement	Busbar trunking	TT - TNS - TNC - IT ⁽¹⁾	TNC
	Tap-off unit	TT - TNS - TNS - IT ⁽¹⁾	TNC



Tap-off polarity 3L + N + PE ⁽²⁾ 3L + PEN

E.g. circuit-breaker protection



Rating (A) 63 100 63 100

Number of 18 mm modules ⁽³⁾ 8 12 8 12

Connection Copper cable lugs Copper cable lugs

Max. size (mm²) Flexible 16 35 16 35

Rigid 16 35 16 35

Cable gland ⁽⁴⁾ (not supplied) ISO 50 max. ISO 63 max. ISO 50 max. ISO 63 max.

Weight (kg) 2.40 5.00 2.40 5.00

Cat. no. KSB63SM48 KSB100SM412 KSB63SM58 KSB100SM512


⁽¹⁾ The neutral must be protected or not distributed (3L + PE) for the IT system..

⁽³⁾ Supplied with blanking plates: 1 x 5 divisible (8 modules) or 2 x 5 divisible (12 modules).


⁽²⁾ Also suitable for tap-off unit 3L + PE (N not distributed).

⁽⁴⁾ Maximum diameter for a multipolar cable.

Dimensions



X = 432.5 (KSB63SM●8)
 X = 545.5 (KSB100SM●12)



KSB63SM●8,
 KSB100SM●12

→ Cable exit
 - - - Centre line of tap-off outlets
 (5) Protruding.



Dim.	63 A	100 A
A	357	444
B	158	183
C	167	202
D	309	397
E	108	133
F	202	220

32 A tap-off unit with power sockets protected by modular devices

Tap-off units for power sockets Disconnection by unplugging the tap-off unit

Catalogue numbers


Earthing system arrangement	Busbar trunking	TT - TNS - TNC - IT ⁽¹⁾
	Tap-off unit	TT - TNS - TNS - IT ⁽¹⁾



Tap-off polarity	3L + N + PE
------------------	-------------

E.g. circuit-breaker protection

Tap-off unit wiring depends on the sockets used




Designation	Tap-off unit with flush-mounted power sockets								Empty tap-off unit	
Calibre (A)	32								32	
Number of 18 mm modules ⁽²⁾	8								-	
Equipment	Quantity	2	2	1	1	1	1	1	1	-
	Type	Household socket Schuko	Household socket NF	Household socket NF	Industrial socket	Household socket Schuko	Industrial socket	Industrial socket	Industrial socket	-
	Current (A)	10/16	10/16	10/16	16	10/16	16	16	16	-
	Voltage (V)	230	230	230	415	230	415	230	415	-
	Polarity	2P + T	2P + T	2P + T	3P + N + T	2P + T	3P + N + T	2P + T	3P + N + T	-
Weight (kg)		2.90	2.90	3.00		3.00		3.10		2.70
Cat. no.		KSB32CP11D	KSB32CP11F	KSB32CP15F		KSB32CP15D		KSB32CP35		KSB32CP

⁽¹⁾ The neutral must be protected or not distributed (3L + PE) for the IT system.

⁽²⁾ Supplied with blanking plate (1 x 5 divisible).

Dimensions

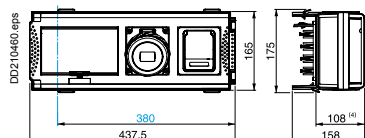

KSB32CP●●●

— Centre line of tap-off outlets

(4) Protruding.

Power sockets

Catalogue numbers



Designation	Industrial sockets Pratika							
Rated current (A)	16				32 ⁽³⁾			
Rated voltage (V AC)	200-250		380-415		200-250		380-415	
Number of poles	2P + T	3P + N + T	2P + T	3P + N + T	2P + T	3P + N + T	2P + T	3P + N + T
Dimensions (W x H in mm)	65 x 85	90 x 100	65 x 85	90 x 100	90 x 100	90 x 100	90 x 100	90 x 100
Cat. no.	PKY16F723	PKY16F725	PKY16F733	PKY16F735	PKY32F723	PKY32F725	PKY32F733	PKY32F735

Designation	Household NF sockets	Household Schuko sockets	Screw-on plate
Rated current (A)	10 to 16	10 to 16	For blanking of unused openings
Rated voltage (V AC)	250	250	For adapting 65 x 85 mm power-socket bases
Number of poles	2P + T	2P + T	-
Dimensions (W x H in mm)	65 x 85	65 x 85	-
Weight (kg)	-	-	0.10
Cat. no.	81140	81141	13137

⁽³⁾ The sum of currents in the 2 sockets installed on the tap-off units \leq 32 A.

Catalogue numbers

Dimensions

IP55

U_e = 230...690 V

RAL 9001 white

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Canalis KS, 100 to 1000 A


Busbar trunking for medium-power distribution

160 to 400 A tap-off units for Compact NSX circuit breakers

Tap-off units for Compact NSX, fixed, front-connected circuit breakers

Catalogue numbers


Earthing system arrangement	Busbar trunking	TT - TNS - TNC - IT ⁽¹⁾	TNC
	Tap-off unit	TT - TNS - TNS - IT ⁽¹⁾	TNC



Tap-off polarity	3L + N + PE ⁽²⁾			3L + PEN			
E.g. circuit-breaker protection							
Rating (A)	160	250	400	160	250	400	
Type of circuit breaker (not supplied)	NSX100 or NSX160 Curve N, H or L with Rotary handle LV429338	NSX250 Curve N, H or L with Rotary handle LV429338	NSX400 Curve N, H or L with Rotary handle LV432598	NSX100 or NSX160 Curve N, H or L with Rotary handle LV429338	NSX250 Curve N, H or L with Rotary handle LV429338	NSX400 Curve N, H or L with Rotary handle LV432598	
Connection	NSX			NSX			
Max. size (mm ²)	Flexible	70	150	240	70	150	240
	Rigid	70	150	240	70	150	240
Cable gland ⁽³⁾ (not supplied)	ISO 32 max.	ISO 40 max.	ISO 50 max.	ISO 32 max.	ISO 40 max.	ISO 50 max.	
Weight (kg)	9.00	12.50	18.00	9.00	12.50	18.00	
Cat. no.	KSB160DC4	KSB250DC4	KSB400DC4	KSB160DC5	KSB250DC5	KSB400DC5	

- (1) The neutral must be protected or not distributed (3L + PE) for the IT system.
 (2) Also suitable for tap-off unit 3L + PE (N not distributed, IT system also possible).
 (3) Maximum diameter by unipolar cable.
Note: the cover of the tap-off unit may be opened only when the circuit breaker is in the Off position.

Dimensions

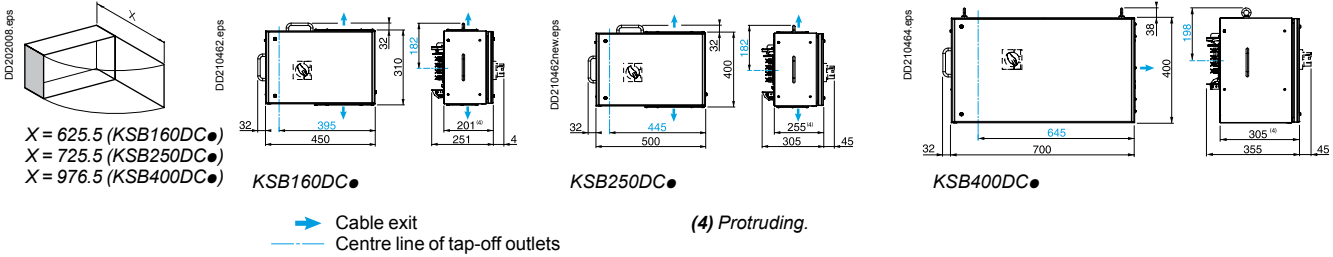


250 and 400 A tap-off units for measurements and metering

Tap-off units for measurements and metering

Catalogue numbers

Earthing system arrangement	Busbar trunking	TT - TNS - TNC - IT ⁽¹⁾	TNC
	Tap-off unit	TT - TNS - TNS - IT ⁽¹⁾	TNC



Tap-off polarity	3L + N + PE ⁽²⁾		3L + PEN	
E.g. circuit-breaker protection				
Rating (A)	250	400	250	400
Type of circuit breaker (not supplied)	NSX250 Type N, H or L with Rotary handle LV429338	NSX400 Type N, H or L with Rotary handle LV432598	NSX250 Type N, H or L with Rotary handle LV429338	NSX400 Type N, H or L with Rotary handle LV432598
Connection	NSX CT block		NSX CT block	
Max. size (mm ²)	Flexible	150	240	240
	Rigid	150	240	240
Cable gland ⁽³⁾ (not supplied)	ISO 40 max.	ISO 50 max.	ISO 40 max.	ISO 50 max.
Weight (kg)	13.50	19.50	13.50	19.50
Cat. no.	KSB250DC4TRE	KSB400DC4TRE	KSB250DC5TRE	KSB400DC5TRE


⁽¹⁾ The neutral must be protected or not distributed (3L + PE) for the IT system.

⁽²⁾ Also suitable for tap-off unit 3L + PE (N not distributed, IT system also possible).


⁽³⁾ Maximum diameter by unipolar cable.

Note: the cover of the tap-off unit may be opened only when the circuit breaker is in the Off position.

Dimensions




X = 726.5 (KSB250DC●TRE)
X = 976.5 (KSB400DC●TRE)

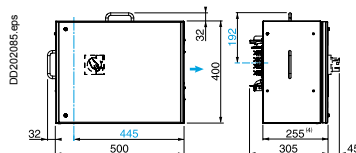

KSB250DC●TRE

→ Cable exit
— Centre line of tap-off outlets

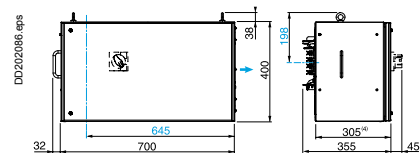

KSB400DC●TRE

(4) Protruding.

Catalogue numbers

Dimensions

IP55

U_e = 230...690 V

RAL 9001 white

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Canalis KS, 100 to 1000 A


Busbar trunking for medium-power distribution

125 to 160 A tap-off units for modular circuit breakers

Tap-off units for NG modular circuit breakers

Catalogue numbers


Earthing system arrangement	Busbar trunking	TT - TNS - TNC - IT ⁽¹⁾	TNC
	Tap-off unit	TT - TNS - TNS - IT ⁽¹⁾	TNC




Tap-off polarity	3L + N + PE ⁽²⁾		3L + PEN	
E.g. circuit-breaker protection				
Rating (A)	160	125	160	125
Type of circuit breaker (not supplied)	NG160 with rotary handle 28060	NG125 with rotary handle 19088	NG160 with rotary handle 28060	NG125 with rotary handle 19088
Connection	NG		NG	
Max. size (mm ²)	Flexible	70	70	70
	Rigid	70	70	70
Cable gland ⁽³⁾ (not supplied)	ISO 32 max.		ISO 32 max.	
Weight (kg)	8.50		8.50	
Cat. no.	KSB160SM413		KSB160SM513	

- (1) The neutral must be protected or not distributed (3L + PE) for the IT system.
 - (2) Also suitable for tap-off unit 3L + PE (N not distributed, IT system also possible).
 - (3) Maximum diameter by unipolar cable.
- Note:** the cover of the tap-off unit may be opened only when the circuit breaker is in the Off position.

Dimensions



X = 625.5



KSB160SM13

- Cable exit
- Centre line of tap-off outlets

(4) Protruding.

160 A tap-off units for modular circuit breakers

Tap-off units for modular circuit breakers


Disconnection by opening the tap-off unit door.

Tap-off units with removable basket including:

- 2 DIN rails allowing to assemble 24 modules of 18 mm each, which are accessible from the front side of the basket
- and 2 other DIN rails for additional devices, which are accessible from the bottom of the basket.

Catalogue numbers


Earthing system arrangement	Busbar trunking	TT - TNS - TNC - IT ⁽¹⁾	TNC
	Tap-off unit	TT - TNS - TNS - IT ⁽¹⁾	TNC




Tap-off polarity	3L + N + PE ⁽²⁾	3L + PEN
E.g. circuit-breaker protection		
Rating (A)	160	160
Number of 18 mm ⁽³⁾ mod. (not supplied)	24	24
Connection	Lugs	Lugs
Max. size (mm²)	Flexible 35 Rigid 50	35 50
Cable gland ⁽⁴⁾ (not supplied)	ISO 50 max.	ISO 50 max.
Weight (kg)	10.69	10.69
Cat. no.	KSB160SM424	KSB160SM524

- ⁽¹⁾ The neutral must be protected or not distributed (3L + PE) for the IT earthing system.
⁽²⁾ Also suitable for 3L + PE tap-off (N not distributed).
⁽³⁾ Supplied with blanking plate 1 x 5 divisible (8 modules) or 2 x 5 divisible (12 modules)
⁽⁴⁾ Max. diameter for a multipole cable.

Dimensions




X = 650

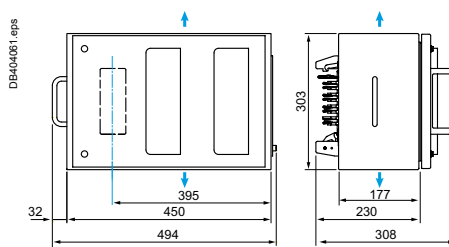

KSB160SM424

- ➔ Cable exit
 - - - Centre line of tap-off outlets



KSB160SM●24

Catalogue numbers

Dimensions

IP55

Ue = 230...690 V

RAL 9001 white

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Canalis KS, 100 to 1000 A


Busbar trunking for medium-power distribution

250 to 400 A tap-off units for Fupact INF switch-disconnector fuses

Tap-off units for Fupact INF, fixed, front-connected switch-disconnector fuses

Catalogue numbers


Earthing system arrangement	Busbar trunking	TT - TNS - TNC - IT ⁽¹⁾	TNC
	Tap-off unit	TT - TNS - TNS - IT ⁽¹⁾	TNC




Tap-off polarity	3L + N + PE ⁽²⁾		3L + PEN	
E.g. circuit-breaker protection				
Rating (A)	250	400	250	400
Type of circuit breaker (not supplied)	INFD 250 or INFB 250 with extended rotary handle	INFD 400 or INFB 400 with extended rotary handle	INFD 250 or INFB 250 with extended rotary handle	INFD 400 or INFB 400 with extended rotary handle
Connection	INF	INF	INF	INF
Max. size (mm ²)	Flexible	70	70	150
	Rigid	150	150	240
Cable gland ⁽³⁾ (not supplied)	ISO 32 max.	ISO 40 max.	ISO 32 max.	ISO 40 max.
Weight (kg)	12.50	18.00	12.50	18.00
Cat. no.	KSB250SDF4	KSB400SDF4	KSB250SDF5	KSB400SDF5

⁽¹⁾ The neutral must be protected or not distributed (3L + PE) for the IT system.
⁽²⁾ Also suitable for tap-off unit 3L + PE (N not distributed, IT system also possible).
⁽³⁾ Maximum diameter by unipolar cable.
Note: the cover of the tap-off unit may be opened only when the INF is in the Off position.


Dimensions



X = 726.5 (KSB250SDF●)
 X = 976.5 (KSB400SDF●)

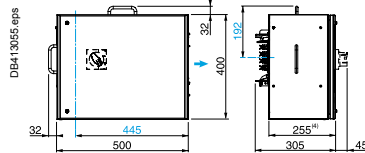



KSB250SDF●
 Cable exit
 Centre line of tap-off outlets

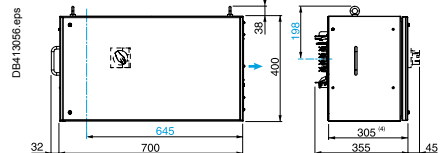

KSB400SDF●
(4) Protruding.


32 to 100 A tap-off units for NF fuses

Tap-off units for cylindrical fuses Disconnection by unplugging the tap-off unit





Catalogue numbers	
Earthing system arrangement	Busbar trunking Tap-off unit TT - TNS - TNC - IT ⁽¹⁾ TT - TNS - TNS - IT ⁽¹⁾
	
Tap-off polarity E.g. fuse protection	3L + N + PE ⁽²⁾ 
Rating (A) For fuses (not supplied)	32 NF 10 x 38 Type gG: 25 A max. Type aM: 32 A max.
Connection	Cable clamp terminals
Max. size (mm ²)	Flexible 6 Rigid 10
Cable gland ⁽³⁾ (not supplied)	ISO 32 max.
Weight (kg)	0.60
Cat. no.	KSB32CF5

- ⁽¹⁾ The neutral must be not distributed (3L + PE) for the IT system.
⁽²⁾ Also suitable for tap-off unit 3L + PE (N not distributed, IT system also possible only if N not distributed).
⁽³⁾ Maximum diameter for a multipolar cable.

Dimensions

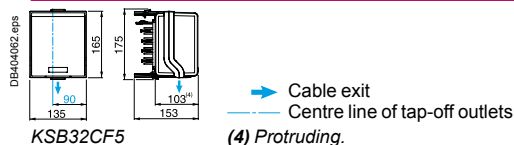


Tap-off unit with isolator for cylindrical fuses Disconnection by opening the tap-off unit cover

Catalogue numbers				
Earthing system arrangement	Busbar trunking Tap-off unit TT - TNS - TNC - IT ⁽¹⁾ TT - TNS - TNS - IT ⁽¹⁾	TNC TNC		
 				
Tap-off polarity E.g. fuse protection	3L + N + PE ⁽²⁾ 	3L + PEN 		
Rating (A) For fuses (not supplied)	50 NF 14 x 51 Type gG, 50 A max. Type aM, 50 A max.	100 NF 22 x 58 Type gG, 100 A max. Type aM, 100 A max.	50 NF 14 x 51 Type gG, 50 A max. Type aM, 100 A max.	100 NF 22 x 58 Type gG, 100 A max. Type aM, 100 A max.
Connection	Cable clamp terminals	Copper cable lugs	Cable clamp terminals	Copper cable lugs
Max. size (mm ²)	Flexible 25 Rigid 25	50 50	25 25	50 50
Cable gland ⁽³⁾ (not supplied)	ISO 50 max.	ISO 63 max.	ISO 50 max.	ISO 63 max.
Weight (kg)	2.40	5.00	2.40	5.00
Cat. no.	KSB50SF4	KSB100SF4	KSB50SF5	KSB100SF5

- ⁽¹⁾ The neutral must be not distributed (3L + PE) for the IT system.
⁽²⁾ Also suitable for tap-off unit 3L + PE (N not distributed, IT system also possible only if N not distributed).
⁽³⁾ Maximum diameter for a multipolar cable.

Dimensions

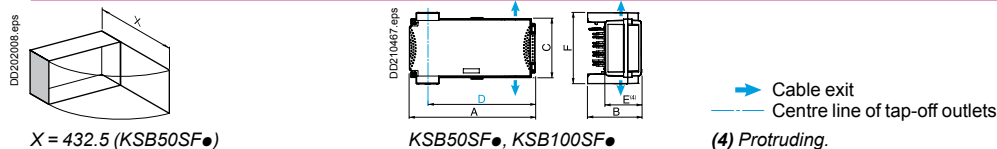

X = 432.5 (KSB50SF●)
X = 545.5 (KSB100SF●)

Dim.	50 A	100 A
A	356	444
B	153	178
C	167	202
D	309	397
E	103	128
F	202	220

Catalogue numbers

Dimensions

IP55

U_e = 230...690 V

RAL 9001 white

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Canalis KS, 100 to 1000 A

Busbar trunking for medium-power distribution



100 to 400 A tap-off units for NF fuses

Tap-off unit with isolator for blade-type fuses

Disconnection by opening the tap-off unit cover


Catalogue numbers

Earthing system arrangement	Busbar trunking	TT - TNS - TNC - IT ⁽¹⁾
	Tap-off unit	TT - TNS - TNS - IT ⁽¹⁾




Tap-off polarity	3L + N + PE ⁽²⁾
------------------	----------------------------

E.g. fuse protection




Rating (A)	100	160	250	400		
For blade-type fuses (not supplied)	Size 00 Type gG, 100 A max. Type aM, 100 A max.	Size 00 Type gG, 160 A max. Type aM, 160 A max.	Size 0 Type gG, 160 A max. Type aM, 160 A max.	Size 1 Type gG, 250 A max. Type aM, 250 A max.	Size 2 Type gG, 400 A max. Type aM, 400 A max.	
Connection	Copper cable lugs	Copper cable lugs	Copper cable lugs	Copper cable lugs	Copper cable lugs	
Max. size (mm ²)	Flexible	35	70	70	150	240
	Rigid	50	70	70	150	240
Cable gland (not supplied)	ISO 63 ⁽⁴⁾ max.	ISO 32 ⁽⁴⁾ max.	ISO 32 ⁽⁴⁾ max.	ISO 40 ⁽⁴⁾ max.	ISO 50 ⁽⁴⁾ max.	
Weight (kg)	5.00	11.00	11.00	20.00	29.20	
Cat. no.	KSB100SE4 ⁽⁵⁾	KSB160SE4	KSB160SF4	KSB250SE4	KSB400SE4	

Earthing system arrangement	Busbar trunking	TNC
	Tap-off unit	TNC



Tap-off polarity	3L + PEN
------------------	----------

Ex.: protection par fusibles



Rating (A)	100	160	250	400		
For blade-type fuses (not supplied)	Size 00 Type gG, 100 A max. Type aM, 100 A max.	Size 00 Type gG, 160 A max. Type aM, 160 A max.	Size 0 Type gG, 160 A max. Type aM, 160 A max.	Size 1 Type gG, 250 A max. Type aM, 250 A max.	Size 2 Type gG, 400 A max. Type aM, 400 A max.	
Connection	Copper cable lugs	Copper cable lugs	Copper cable lugs	Copper cable lugs	Copper cable lugs	
Max. size (mm ²)	Flexible	35	70	70	150	240
	Rigid	50	70	70	150	240
Cable gland (not supplied)	ISO 63 ⁽³⁾ max.	ISO 32 ⁽⁴⁾ max.	ISO 32 ⁽⁴⁾ max.	ISO 40 ⁽⁴⁾ max.	ISO 50 ⁽⁴⁾ max.	
Weight (kg)	5.00	11.00	11.00	20.00	29.20	
Cat. no.	KSB100SE5 ⁽⁵⁾	KSB160SE5	KSB160SF5	KSB250SE5	KSB400SE5	

⁽¹⁾ The neutral must be not distributed (3L + PE) for the IT system.


⁽²⁾ Also suitable for tap-off unit 3L + PE (N not distributed, IT system also possible only if N not distributed).

⁽³⁾ Maximum diameter for a unipolar cable.

⁽⁴⁾ Cable gland for multipolar cable only.

⁽⁵⁾ For 100 A dimensions, see "Tap-off units with insulators for cylindrical fuses", page 193, cat. no. KSB100SF.


Dimensions



X = 577.5 (KSB160S●●)

X = 777 (KSB250SE●)

X = 855 (KSB400SE●)




KSB160S●●, KSB250SE●

(1) Cable exit of KSB160S●●

(2) Cable exit of KSB250SE●

(6) Protruding.

Dim.	160 A	250 A
A	450	600
B	257	308
C	300	400
D	395	548
E	207	258
F	032	032
G	032	032
H	182	192



KSB400SE●

➔ Sortie de câble

— Axe des trappes de dérivation


(6) Protruding.

16 to 63 A Tap-off units for DIN fuses

Tap-off units for screw-type fuses Disconnection by unplugging the tap-off unit


Catalogue numbers

Earthing system arrangement	Busbar trunking	TT - TNS - TNC - IT ⁽¹⁾
	Tap-off unit	TT - TNS - TNS - IT ⁽¹⁾



Tap-off polarity 3L + N + PE ⁽²⁾

E.g. fuse protection



Rating (A) 16

For fuses (not supplied) Neozed E14

Connection Tunnel terminals

Max. size (mm²) Flexible 6

Rigid 10

Cable gland ⁽³⁾ (not supplied) ISO 32 max.

Weight (kg) 0.60


Cat. no. KSB16CN5

⁽¹⁾ The neutral must be not distributed (3L + PE) for the IT system.

⁽²⁾ Also suitable for tap-off unit 3L + PE (N not distributed, IT system also possible only if N not distributed).

⁽³⁾ Maximum diameter for a multipolar cable.

Dimensions




Sortie de câble
Axe des trappes de dérivation
⁽⁴⁾ Cote de saillie.

Tap-off unit with isolator for screw-type fuses Disconnection by opening the tap-off unit cover


Catalogue numbers

Earthing system arrangement	Busbar trunking	TT - TNS - TNC - IT ⁽¹⁾	TNC
	Tap-off unit	TT - TNS - TNS - IT ⁽¹⁾	TNC




Tap-off polarity 3L + N + PE ⁽²⁾

E.g. fuse protection



3L + PEN



Rating (A) 25 50 63 25 50 63

For fuses (not supplied) Diazed E27 Neozed E18 Diazed E33 Diazed E27 Neozed E18 Diazed E33

Connection Tunnel terminals Tunnel terminals Tunnel terminals Tunnel terminals Tunnel terminals Tunnel terminals

Max. size (mm²) Flexible 25 25 25 25 25 25

Rigid 25 25 25 25 25 25

Cable gland ⁽³⁾ (not supplied) ISO 50 max. ISO 50 max. ISO 63 max. ISO 50 max. ISO 50 max. ISO 63 max.

Weight (kg) 2.40 2.40 2.40 2.40 2.40 2.40


Cat. no. KSB25SD4 KSB50SN4 KSB63SD4 KSB25SD5 KSB50SN5 KSB63SD5

⁽¹⁾ The neutral must be not distributed (3L + PE) for the IT system.


⁽²⁾ Also suitable for tap-off unit 3L + PE (N not distributed, IT system also possible only if N not distributed).

⁽³⁾ Maximum diameter for a multipolar cable.

Dimensions



X = 432.5 (KSB25SD●, KSB50SN●)
X = 545.5 (KSB63SD●)



Cable exit
Centre line of tap-off outlets
⁽⁴⁾ Protruding

Dim.	25 and 50 A	63 A
A	356	444
B	153	178
C	167	202
D	309	397
E	103	128
F	202	220

Catalogue numbers

Dimensions

IP55

U_e = 230...690 V

RAL 9001 white

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Canalis KS, 100 to 1000 A

Busbar trunking for medium-power distribution


100 to 400 A tap-off units for DIN fuses

Tap-off unit with isolator for blade-type fuses

Disconnection by opening the tap-off unit cover


Catalogue numbers

Earthing system arrangement	Busbar trunking	TT - TNS - TNC - IT ⁽¹⁾
	Tap-off unit	TT - TNS - TNS - IT ⁽¹⁾



Tap-off polarity	3L + N + PE ⁽²⁾
------------------	----------------------------

E.g. fuse protection




Rating (A)	100	160	250	400
For blade-type fuses (not supplied)	Size 00 Type gG, 100 A max. Type aM, 100 A max.	Size 00 Type gG, 160 A max. Type aM, 160 A max.	Size 1 Type gG, 250 A max. Type aM, 250 A max.	Size 2 Type gG, 400 A max. Type aM, 250 A max.
Connection	Copper cable lugs			
Max. size (mm ²)	Flexible	35	70	150
	Rigid	50	70	150
Cable gland (not supplied)	ISO 63 ⁽³⁾ max.	ISO 32 ⁽⁴⁾ max.	ISO 40 ⁽⁴⁾ max.	ISO 50 ⁽⁴⁾ max.
Weight (kg)	5.00	11.00	20.00	29.20
Cat. no.	KSB100SE4 ⁽⁵⁾	KSB160SE4	KSB250SE4	KSB400SE4

Earthing system arrangement	Busbar trunking	TNC
	Tap-off unit	TNC

Tap-off polarity	3L + PEN
------------------	----------

E.g. fuse protection



Rating (A)	100	160	250	400
For blade-type fuses (not supplied)	Size 00 Type gG, 100 A max. Type aM, 100 A max.	Size 00 Type gG, 160 A max. Type aM, 160 A max.	Size 1 Type gG, 250 A max. Type aM, 250 A max.	Size 2 Type gG, 400 A max. Type aM, 250 A max.
Connection	Copper cable lugs			
Max. size (mm ²)	Flexible	35	70	150
	Rigid	50	70	150
Cable gland (not supplied)	ISO 63 ⁽³⁾ max.	ISO 32 ⁽⁴⁾ max.	ISO 40 ⁽⁴⁾ max.	ISO 50 ⁽⁴⁾ max.
Weight (kg)	5.00	11.00	20.00	29.20
Cat. no.	KSB100SE5 ⁽⁵⁾	KSB160SE5	KSB250SE5	KSB400SE5

⁽¹⁾ The neutral must be not distributed (3L + PE) for the IT system.


⁽²⁾ Also suitable for tap-off unit 3L + PE (N not distributed, IT system also possible only if N not distributed).

⁽³⁾ Maximum diameter for a unipolar cable.


⁽⁴⁾ Cable gland for multipolar cable only.

⁽⁵⁾ For 100 A dimensions, see "Tap-off units with insulators for cylindrical fuses", page 193, cat. no. KSB100SF●.

Dimensions



X = 577.5 (KSB160S●●)
X = 777 (KSB250SE●)
X = 855 (KSB400SE●)




KSB160S●●, KSB250SE●

- ➔ (1) Cable exit of KSB160SE●●
Cable exit of KSB250SE●
- (2) Centre line of tap-off outlets

(6) Protruding

Dim.	160 A	250 A
A	450	600
B	257	308
C	300	400
D	395	548
E	207	258
F	032	032
G	032	032
H	182	192



KSB400SE●

- ➔ Cable exit
- Centre line of tap-off outlets


(6) Protruding

20 to 160 A tap-off units for BS fuses

Tap-off units for screw-mounted fuses Disconnection by unplugging the tap-off unit


Catalogue numbers

Earthing system arrangement	Busbar trunking Tap-off unit	TT - TNS - TNC - IT ⁽¹⁾ TT - TNS - TNS - IT ⁽¹⁾
-----------------------------	------------------------------	--



Tap-off polarity	3L + N + PE ⁽²⁾
------------------	----------------------------

E.g. fuse protection




Rating (A)	20	
For fuses (not supplied)	BS88 A1	
Connection	Cable clamp terminals	
Max. size (mm ²)	Flexible	6
	Rigid	10
Cable gland ⁽³⁾ (not supplied)	ISO 32 max.	
Weight (kg)	0.60	
Cat. no.	KSB20CG5	

⁽¹⁾ The neutral must be not distributed (3L + PE) for the IT system.


⁽²⁾ Also suitable for tap-off unit 3L + PE (N not distributed, IT system also possible only if N not distributed).

⁽³⁾ Maximum diameter for a multipolar cable.

Dimensions





KSB20CG5



Tap-off unit with isolator for screw-mounted fuses Disconnection by opening the tap-off unit cover


Catalogue numbers

Earthing system arrangement	Busbar trunking Tap-off unit	TT - TNS - TNC - IT ⁽¹⁾ TT - TNS - TNS - IT ⁽¹⁾
-----------------------------	------------------------------	--



Tap-off polarity	3L + N + PE ⁽²⁾
------------------	----------------------------

E.g. fuse protection



Rating (A)	32	80	160
For fuses (not supplied)	BS88 A1	BS88 A1 or A3	BS88 B1 or B2
Connection	Cable clamp terminals	Copper cable lugs	Copper cable lugs
Max. size (mm ²)	Flexible	25	35
	Rigid	25	50
Cable gland ⁽³⁾ (not supplied)	ISO 50 max. ⁽³⁾	ISO 63 max. ⁽³⁾ or ISO 20 max. ⁽⁴⁾	ISO 25 max. ⁽⁴⁾
Weight (kg)	2.40	5.00	11.00
Cat. no.	KSB32SG4	KSB80SG4	KSB160SG4


⁽¹⁾ The neutral must be not distributed (3L + PE) for the IT system.

⁽²⁾ Also suitable for tap-off unit 3L + PE (N not distributed).


⁽³⁾ Maximum diameter for a multipolar cable.

⁽⁴⁾ Maximum diameter for a unipolar cable.



Dimensions



X = 432.5 (KSB32SG4)
X = 545.5 (KSB80SG4)
X = 577.5 (KSB160SG4)



KSB32SG4, KSB80SG4



KSB160SG4
(5) Protruding

Dim.	32 A	80 A
A	356	444
B	153	178
C	167	202
D	309	397
E	103	128
F	202	220

References

Dimensions

IP55

Ue = 230...415 V

White RAL 9001

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Canalis KS - 100 to 1000 A

Busbar trunking for medium-power distribution

Tap-off units equipped with a surge arrester

Tap-off units equipped with a surge arrester

Disconnection by unplugging the tap-off unit


Catalogue numbers

Earthing system arrangement Busbar trunking TT - TNS - TNC



Tap-off polarity 3L + N + PE ⁽¹⁾

Diagram



Protection type Type 2

Lightning arrester cartridges (supplied) Fixed

Connection Pre-wired

Permissible short-circuit I_{sc} (kA) 6

Max. discharge current I_{max} (kA) 10


Weight (kg) 1.3

Cat. no. KSBQPF

SPD (Surge Protection Device) installed: Quick PF10 SPD, 3P + N, cat. no. 16618 (Type 2 monoblock surge arrester, with fixed cartridges and integrated disconnection device, certified IEC 81643-1, EN 61643-11).

⁽¹⁾ Also suitable for tap-off unit 3L + PE (N not distributed).

Dimensions



KSBQPF


— Centre line of tap-off outlets
(5) Protruding.

Tap-off units with isolator equipped with a surge arrester

Disconnection by opening the tap-off unit cover


Catalogue numbers

Earthing system arrangement Busbar trunking TT - TNS - TNC



Tap-off polarity 3L + N + PE ⁽¹⁾

Diagram



Protection type Type 2

Surge arrester cartridges (supplied) Removable

Connection Pre-wired

Permissible short-circuit I_{sc} (kA) 25

Max. discharge current I_{max} (kA) 40


Weight (kg) 3.40

Cat. no. KSBQPRD


Surge arrester installed: Quick PRD40r surge arrester, 3P + N, cat. no. 16294 (Type 2 monoblock surge arrester, with fixed cartridges and integrated disconnection device, certified IEC 81643-1, EN 61643-11).

⁽¹⁾ Also suitable for tap-off unit 3L + PE (N not distributed).

Dimensions



X = 432.5

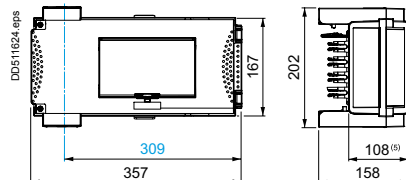

KSBQPRD

— Centre line of tap-off outlets
(5) Protruding.

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Accessories

Accessories

Catalogue numbers

For all tap-off units for modular devices

Designation	Modular blanking plat	Adhesive label ⁽¹⁾		
Description	Divisible set of 10 x 5	Set of 12 label-holders (H = 24 mm - L = 180 mm)	Set of 12 labels-holders (H = 24 mm - L = 432 mm)	Set of 12 divisible labels-holders (H = 24 mm - L = 650 mm)
Weight (kg)	0.08	0.50	0.50	0.50
Cat. no.	13940	08905	08903	08907

(1) Self-adhesive support complete with transparent cover and paper label.

For sheet-metal tap-off units

Designation	Cover contact (break before opening)
For tap-off unit	KSB100S● to KSB400S●
Order in multiples of	1
Weight (kg)	0.03
Cat. no.	KSB400ZC1

Installation

IP55
Ue = 230...690 V
RAL 9001 white

Please refer to the
Canalis KS catalogue,
reference DEBU026EN,
available on schneider-electric.com


Canalis KS, 100 to 1000 A

Busbar trunking for medium power distribution


Assembly of trunking components

Assembling the straight lengths


100 and 250 A

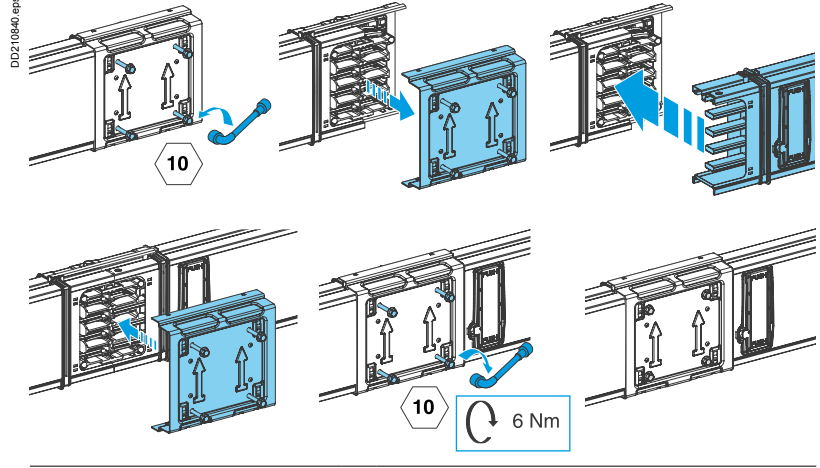

400 A

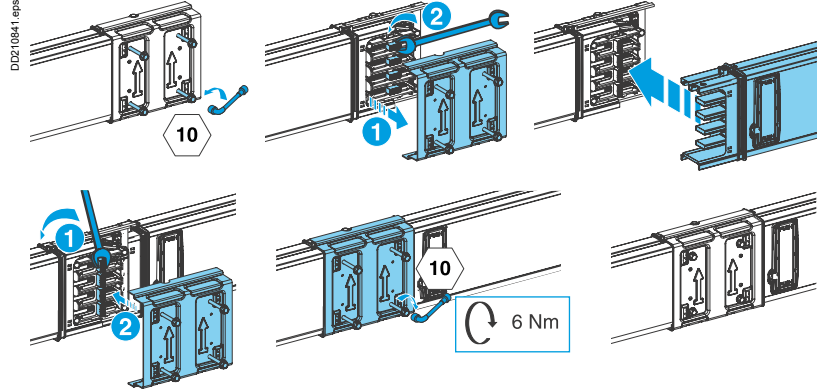


500 to 1000 A

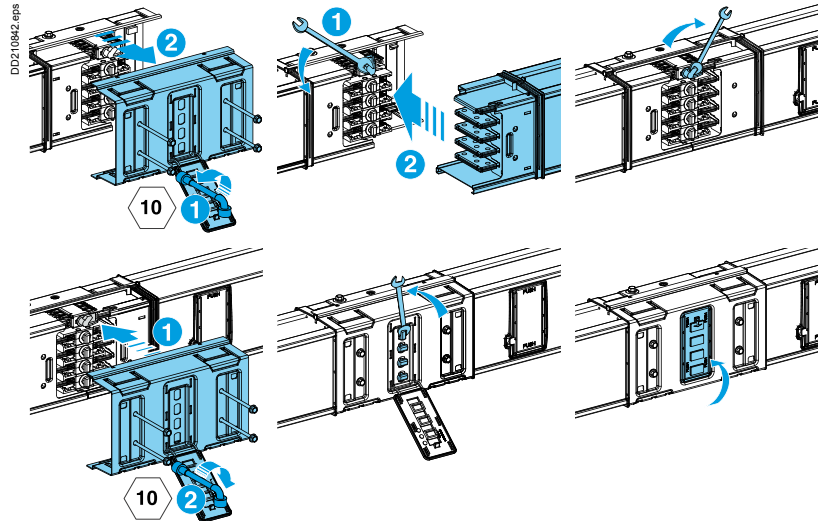


Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Connecting the feed-units


100 and 250 A

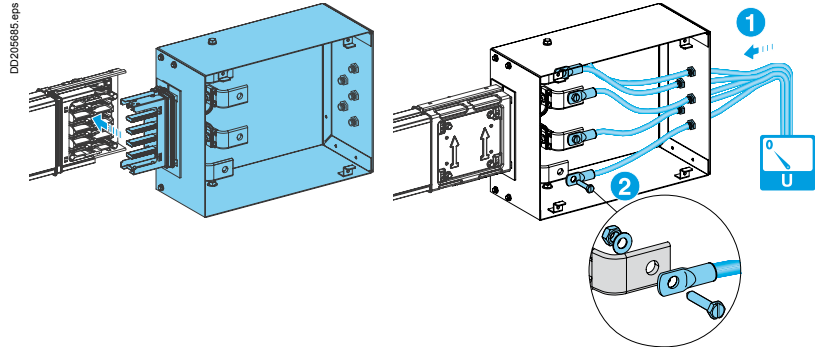

400 A

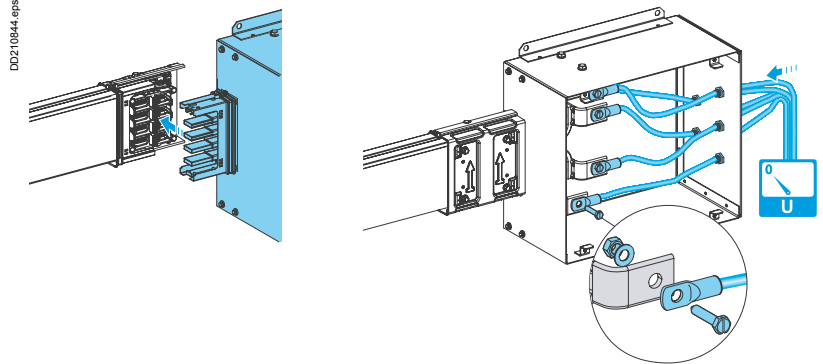


500 to 1000 A

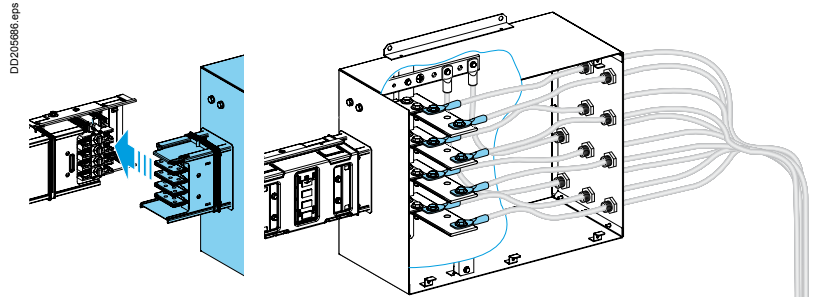


Assembling the end covers

100 to 400 A

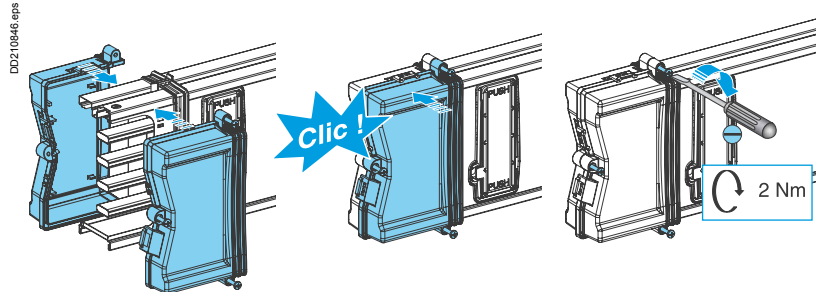

500 to 1000

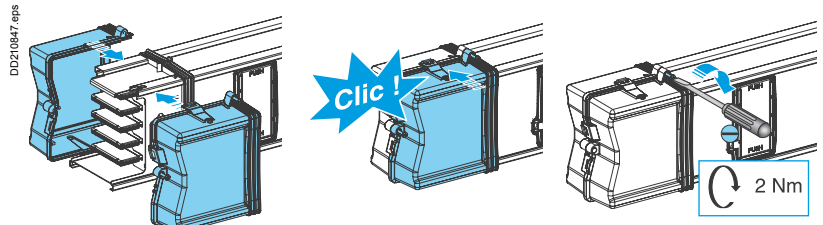

Installation

IP55
Ue = 230...690 V
RAL 9001 white


Please refer to the
Canalis KS catalogue,
reference DEBU026EN,
available on schneider-electric.com

Canalis KS, 100 to 1000 A


Busbar trunking for medium power distribution

Assembly of trunking components


Fixing Canalis KS in the brackets

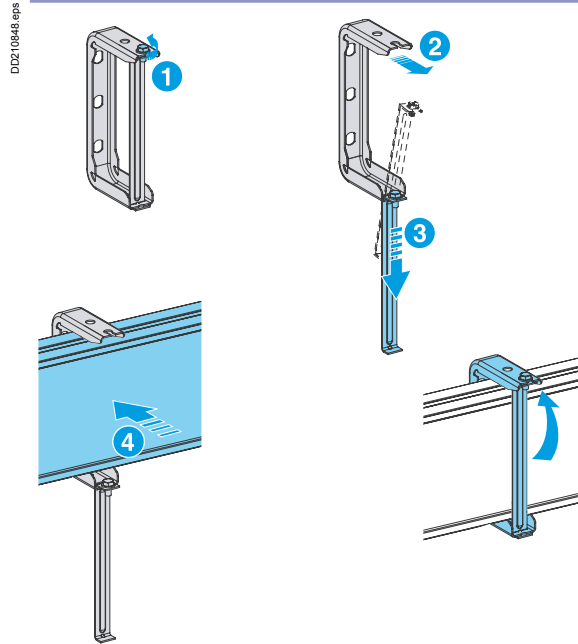

Mounting the tap-off unit

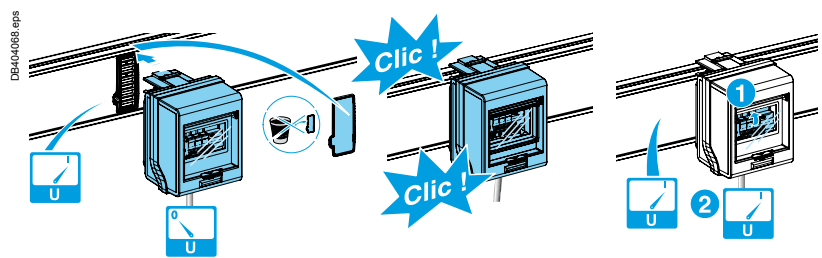


Mounting the tap-off unit with modular devices

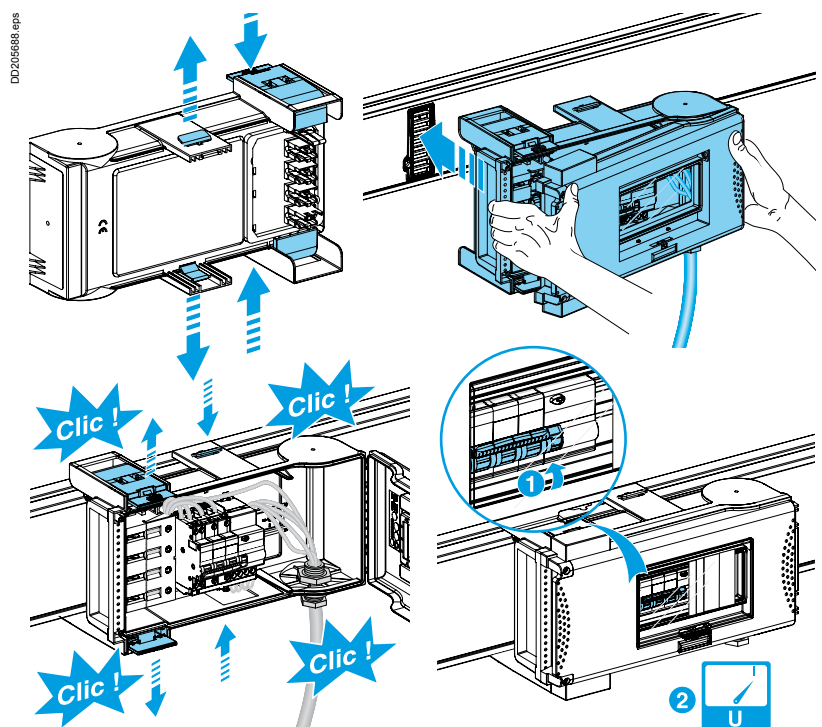

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Mounting the tap-off unit with Compact NSX circuit breaker

DC205683.eps

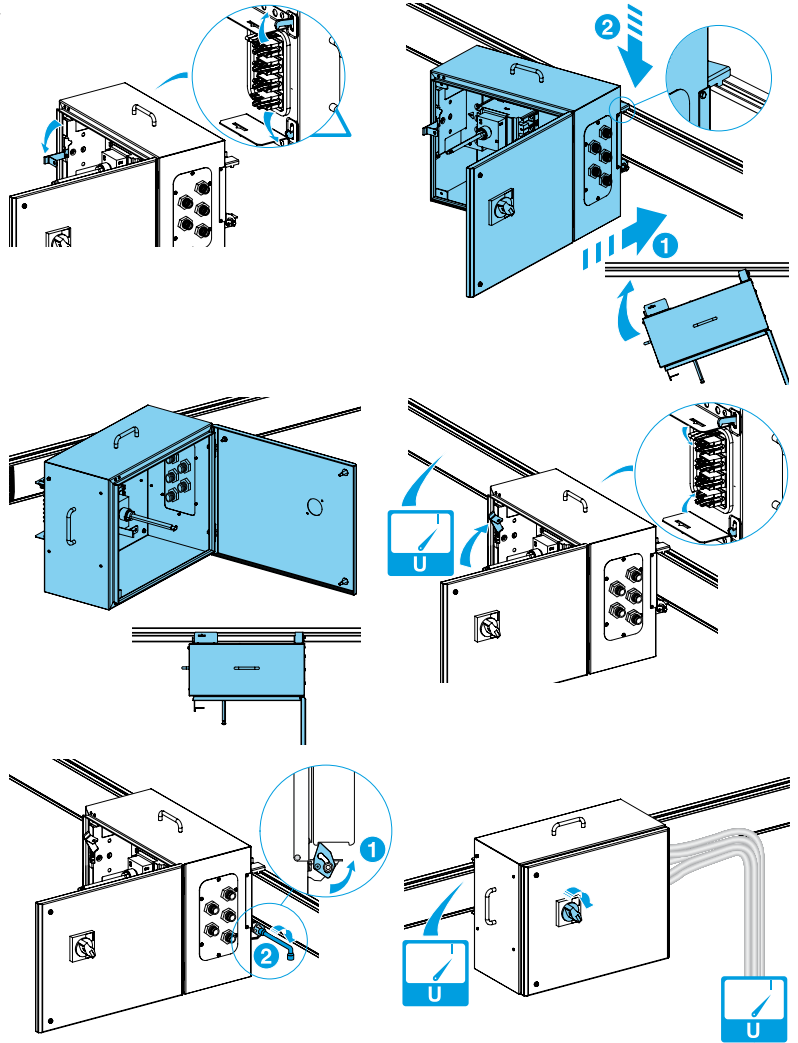

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

<i>Index</i>	3
<i>Introduction</i>	9
<i>Design guides and characteristics</i>	29
<i>Canalis KDP</i>	57
<i>Canalis KBA</i>	79
<i>Canalis KBB</i>	99
<i>Canalis KN</i>	121
<i>Canalis KS</i>	153

Presentation

Canalis KS rising mains	206
Medium-power busbar trunking for multi-storey building from 100 to 1000 A	206

Description

Canalis KS, 100 to 1000 A	210
Rising mains	210
Medium-power busbar trunking for multi-storey buildings	210

Catalogue numbers - Dimensions

Canalis KS, 100 to 400 A	212
Medium-power busbar trunking for multi-storey building	212
Rising mains	212
Canalis KS, 500 to 1000 A	217
Medium-power busbar trunking for multi-storey building	217
Rising mains	217


<i>Canalis KT</i>	225
<i>Technical specifications</i>	231
<i>Maintenance</i>	239
<i>Recommendations for special applications</i>	243
<i>Catalogue numbers</i>	273
<i>Canalis worldwide</i>	279

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Canalis KS rising mains

Medium-power busbar trunking for multi-storey building from 100 to 1000 A

PD202110_WZ_eps

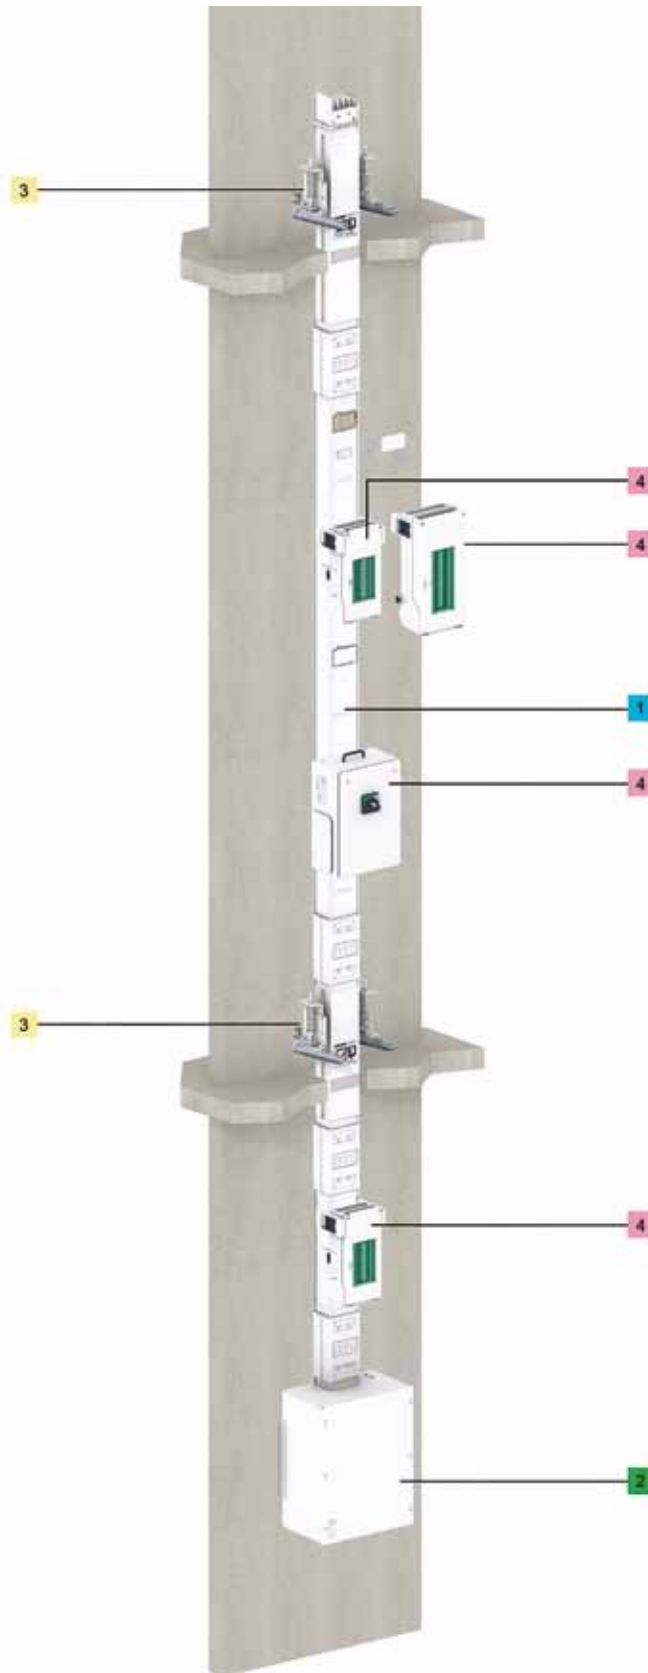

1. Run components

- Rating: 100, 250, 400, 500, 630, 800 and 1000 A.
- 4 live conductors.
- 2 types of riser components for:
 - power-distribution between floors,
 - horizontal sections.

PD020211_rW.eps



2. Feed units and end covers

- The feed units delivered with end covers, receive the cables supplying one end or any other point of Canalis KS trunking

PD020212_rW.eps



3. Fixing system

- The fixing system is made up of
 - bottom support,
 - floor guide,
 - floor supports for the riser.

PD020213W.eps



4. Tap-off units

- The tap-off units (with and without isolators) are used to supply loads from 25 to 400 A.
- Protection using modular or Compact NSX circuit breakers or fuses.

PD020214_rW.eps



Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Canalis KS rising mains

Medium-power busbar trunking for multi-storey building from 100 to 1000 A

<Small> Schneider Electric



Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

DD202210_7.eps



PD202233_8.eps



PD202212_4W.eps



DD202146_7.eps



Dependable and reliable

Canalis KS benefits from a number of marine certifications, including Bureau Veritas (BV), Lloyd's (GL) and Norske Veritas (DNV).

No risk in case of fire

All components in the KS range are **halogen free** and contain no PVCs. In case of fire, Canalis KS releases very small quantities of smoke and no toxic gases. Due to the two-hour fire barrier, **flames cannot spread**. The trunking thus contributes to containing the fire for two hours.

A high degree of protection

Canalis KS offers an IP55 degree of protection.

Thus, it can be installed in all types of buildings and in all positions.

Even installed vertically, it retains the IP55 degree of protection without requiring any accessories.

Unmatched upgrading possibilities

Canalis KS makes it fast and easy to upgrade the installation. The tap-off units can be removed and handled under energised conditions.

What is more, a line **does not require expansion joints** since the expansion of straight lengths is absorbed automatically by the electrical junctions. This technique ensures that the tap-off outlets on all floors remain available.

Easy handling and installation

Floor-distribution components are designed to facilitate:

- **access to the straight lengths on floors** given the narrowness of lift shafts and stairways,
- **installation of the straight lengths** given the height of doors and the size of shafts and technical ducts.

Because the available space in technical ducts is limited, Canalis KS gives the advantage to use **significantly less room** compared to a centralised distribution system using cables.

Installation is made easy due to the design of the **jointing units that facilitate alignment** of the straight lengths.

Maintenance free

Canalis KS enhances the continuity of service because **no maintenance is required on the line**. All sliding jointing contacts are lubricated for the life of the product.

Light and easy to handle

Canalis trunking is **light and easy to handle** due to the use of aluminium conductors.

For equal power ratings, trunking equipped with copper conductors is 40% heavier.

The low weight of Canalis KS simplifies installation and greatly reduces the time required. Fewer workers and resources are required, whatever the type of installation.

Very flexible

The floor-distribution components in the Canalis KS range offer **3 or 4 tap-off outlets per floor**, enough to have reserve outlets for future upgrades.

Description

IP55

U_e = 230...690 V


RAL 9001 white

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Canalis KS, 100 to 1000 A

Rising mains

Medium-power busbar trunking for multi-storey buildings

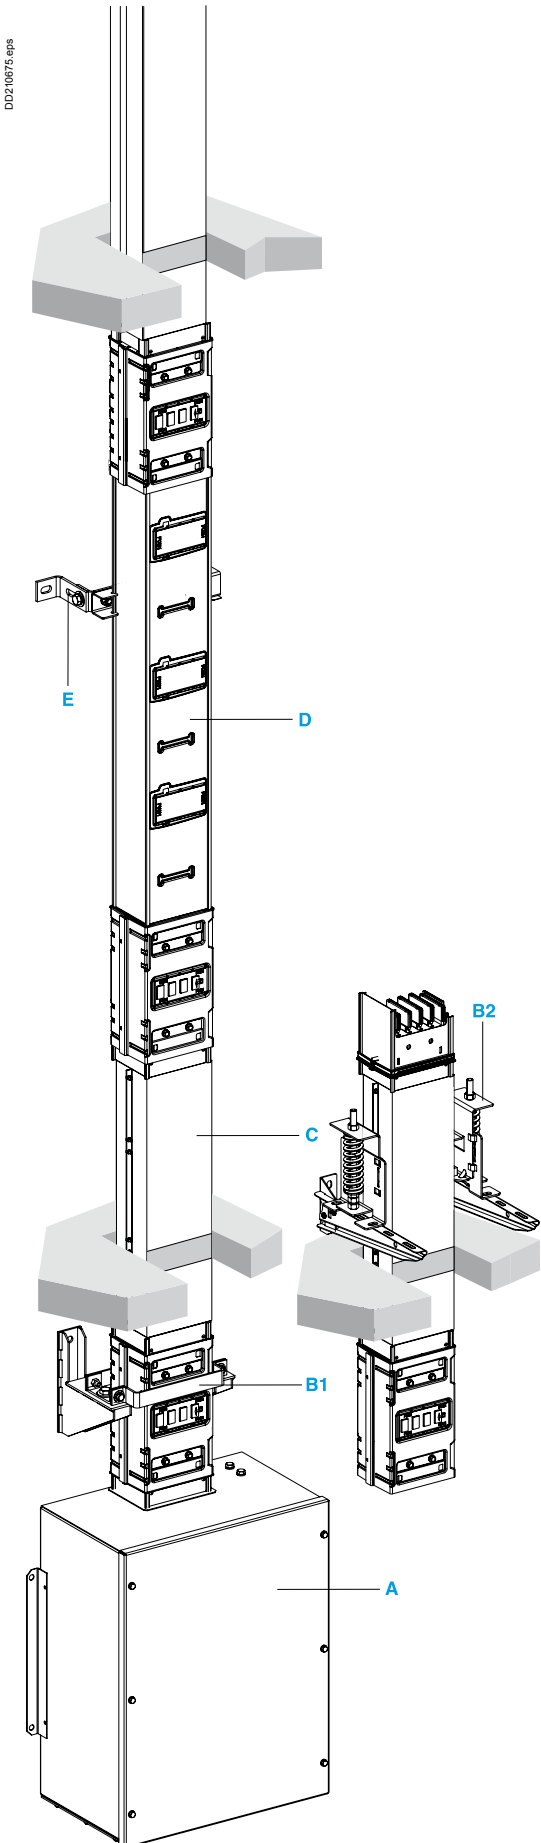

General

Canalis KS risers distribute power to each floor in multi-level buildings (office buildings, hotels, hospitals, car parks and ships).

In this application, Canalis KS offers its many advantages:

- aluminium conductors, equipped with bimetal aluminium/silver-plated copper contacts at junctions and tap-off points
- a mechanical and electrical jointing system that ensures automatic and simultaneous jointing of all live conductors and the continuity of the protective earth conductor, as well as its connection with the casing. This jointing block also absorbs the difference in conductor and casing thermal expansion for each length
- tap-off outlets with automatic shutters.

For more detailed description, see "Canalis 100 to 1000 A for power distribution", in the "Description" chapter, page 158.

When installed vertically, the Canalis KS degree of protection is IP55.

How to build rising mains

A Use an end feed unit, type **KSA...ABD4** in order to have the neutral on the right-hand side in the riser.

B Two solutions are available to support the riser.

B1 Use the **KSB...ZV1** bottom support for risers. Placed at the bottom of the riser and secured to the wall, this support takes the entire weight of the rising mains. Consequently, depending on the rating, the maximum height of the rising mains is limited as indicated opposite,

Rating (A)	Max. recommended height	Max. recommended weight by support
100 and 250	40 m	680 kg
400	30 m	680 kg
500	70 m	1760 kg
630	50 m	1760 kg
800	50 m	1760 kg
1000	40 m	1760 kg

B2 Use floor supports **KSB...ZV3**, only compatible with special elements **KSA...ET4AF** and **KSA...ZV3**. They are used to support the riser on each floor of the building, for enhanced flexibility in carrying out the various installation phases. With this support, riser sections can be installed even when the lower floors have not been completed.

Rating (A)	Max. recommended height	Recommended weight by support
All	150 m	440 kg

Above 100 m, avoid the use of fixed components (e.g. elbows) and supply power using cables wherever possible.

C Use custom-length fire barriers to block fire propagation between floors. They also provide the means to adjust to the distance between floors.


D Use standard straight lengths, 2 or 2.50 metres long. Lengths and fire barriers can be combined to provide:

Solution 1: for a distance of 2900 mm to 4300 mm between floors, three tap-off outlets with **KSA...EV4203** straight lengths,


Solution 2: for a distance of 3400 mm to 4800 mm between floors, four tap-off outlets with **KSA...EV4254** straight lengths,

E Use **KSB 1000ZV2** fixings to guide the riser on each floor.


Solution 1:

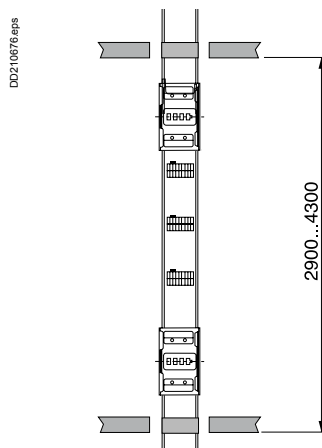

Solution 2:

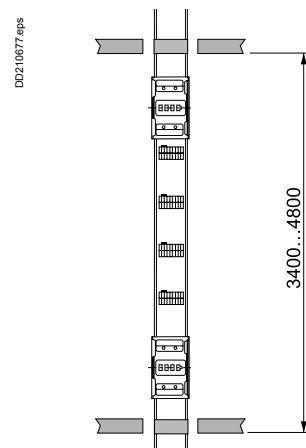

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

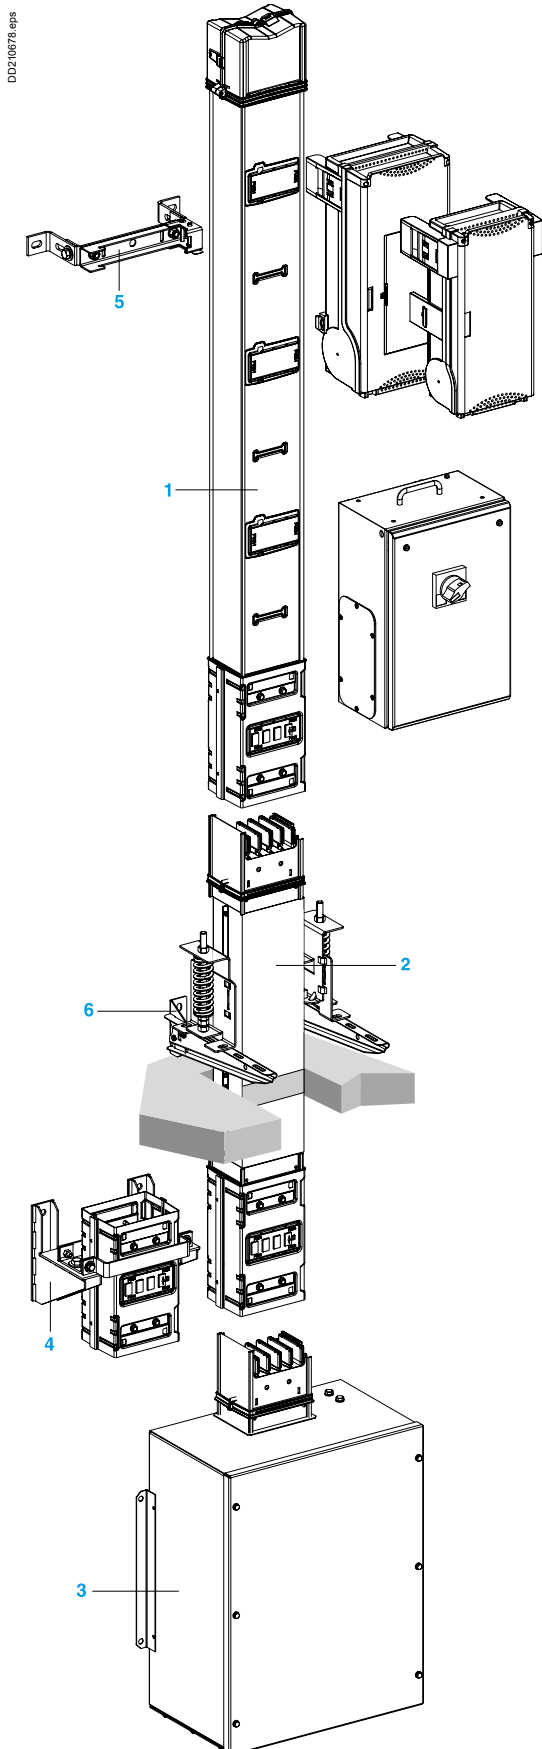

Riser components

1 Straight lengths for distribution

Specially designed for rising mains, they are available in two lengths (2 and 2.5 metres).

They have three or four tap-off outlets, all on the same side. The outlets are positioned to enable connection of up to three 160 A tap-off units for Compact NSX circuit breakers on the two-metre lengths and up to four on the 2.5-metre lengths.

2 Custom-length fire-barrier lengths

Installed at each floor level, these lengths eliminate any risk of fire propagation from one floor to another via the trunking. These fire barriers have been tested in a certified laboratory and comply with standard EN 1363-1. The laboratory report lists the following results:

- thermal insulation: ≥ 120 minutes
- resistance to flames: ≥ 120 minutes
- stability: ≥ 120 minutes.

Provided in custom lengths, these barriers are used with the straight lengths to adjust to the exact height of each floor.

Feed units

Direct supply

The trunking connects directly to a switchboard via a spreader. In this configuration, the riser is supplied through a horizontal section made of lengths without tap-off outlets.

3 Supply via cables

Equipped with terminals made of tinned aluminium, this feed unit is designed for connection to copper or aluminium cables equipped with the necessary lugs.

The feed unit is also equipped with an aluminium gland plate.

The plate can be removed and is not pre-drilled.

Fixing systems

4 Bottom support

This component attaches to the first jointing unit at the base of the riser and is secured to the wall by two brackets. It supports the entire riser (see height limitations on the previous page).

Note: the foot of the riser is a special jointing unit to which a wall bracket is installed.

5 Guides

These guides, clipped to the riser, maintain it in the vertical position on each floor. They not block access to the tap-off outlets.

6 Floor supports

Secured to the floor or wall (via Canalis 200 mm cantilever arms), they attach to the sides of a special component (with or without fire barrier).

Tap-off units

Standard KS tap-off units are used (see Catalogue page 186).

Accessories

Sprinkler kit

To comply with the sprinkler tests (guaranteeing operation under vertically and horizontally sprayed water for 50 minutes), each electrical jointing system should be fitted with a reinforced protection kit (the jointing sleeve).

Catalogue numbers

Dimensions Please refer to the Canalis
 IP55 KS catalogue, reference
 $U_e = 230...690\text{ V}$ DEBU026EN,
 RAL 9001 white available on schneider-
 electric.com

Canalis KS, 100 to 400 A


Medium-power busbar trunking for multi-storey building

Rising mains

Riser components - Distribution to floors

Catalogue numbers

Riser lengths



Rating (A)	100	250	400
Length (mm)	2000	2500	2000
Number of tap-off outlets	3	4	3
Weight (kg)	8.10	10.85	13.90
Cat. no.	KSA100EV4203	KSA250EV4203	KSA400EV4203

Note: It is also possible to use standard 1.5 metre long straight lengths (KSA●●●ED4156).

Distribution length at foot of riser





Rating (A)	100	250	400
Length (mm)	800	800	800
Number of tap-off outlets	1	1	1
Weight (kg)	5.40	5.40	5.40
Cat. no.	KSA100ED4081	KSA250ED4081	KSA400ED4081




Fire barriers without tap-off outlets

Rating (A)	250	400
Length Dim. l (mm)	900 to 2200	900 to 2200
Barrier position Dim. x (mm)	450 to 1750	450 to 1750
Weight (kg/m)	8.40	9.90
Cat. no.	KSA250ET4AF	KSA400ET4AF


Dimensions

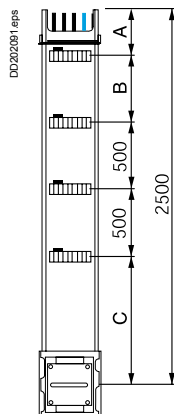


Dim.	100 A / 250 A	400 A
A	135	150
B	500	485
C	865	865

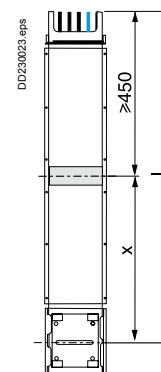

KSA●●●EV4254



KSA●●●EV4203



KSA●●●ED4081



900 ≤ l ≤ 2200 mm
 450 ≤ x ≤ 1750 mm
 KSA●●●ET4AF


Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Components for changing direction - Elbow

Catalogue numbers

Rating (A)	100 to 250			400		
Direction (edgewise)	Left or right	Upward	Downward	Left or right	Upward	Downward
Weight (kg)	3.15	5.00	5.00	3.80	5.60	5.60
Cat. no.	KSA250DLC40	KSA250DLE40	KSA250DLF40	KSA400DLC40	KSA400DLE40	KSA400DLF40

Dimensions

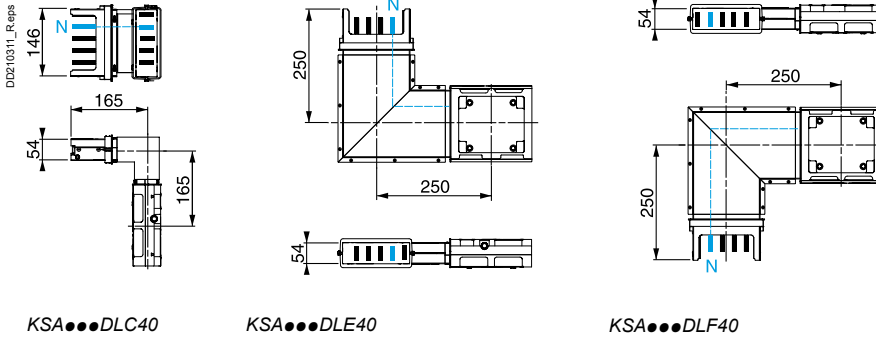

Note: Other changes in direction can be made on special order, please consult us.

Catalogue numbers

Dimensions

IP55

U_e = 230...690 V

RAL 9001 white

Please refer to the Canalis
KS catalogue, reference

DEBU026EN,

available on schneider-
electric.com

Canalis KS, 100 to 400 A

Medium-power busbar trunking

for multi-storey building


Rising mains

Feed units (supplied with end cover)

Catalogue numbers


Designation	End feed unit			Flange feed unit	
Rating (A)	100	100 to 250	400	100 to 250	400
Mounting	Right or left	Right or left	Right or left	Right or left	Right or left
Connection	Terminals	Lugs (M10 screws)	Lugs (M10 screws)	Lugs (M10 screws)	Lugs (M10 screws)
Max. size (mm²)	5 x 16	240	1 x 300 or 2 x 120	-	-
Flexible or rigid					
Weight (kg)	1.85	7.20	8.80	1.70	1.90
Cat. no.	KSA100AB4	KSA250AB4	KSA400AB4	KSA250AE4	KSA400AE4

Dimensions

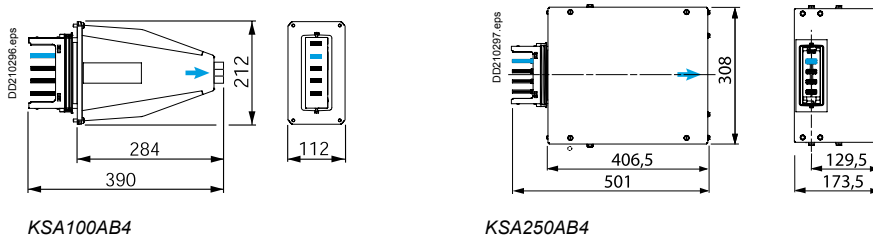


KSA100AB4

KSA250AB4

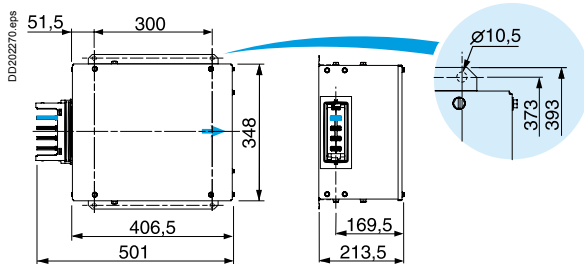

KSA400AB4

➔ Sortie de câbles

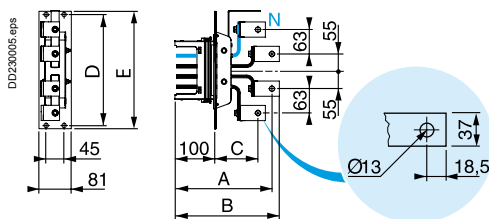

KSA...AE4


Dim.	100 to 250 A	400 A
A	243	261
B	261.5	279.5
C	108	117
D	278	318
E	294	334

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com


Fixing systems

Catalogue numbers

Bottom support



Rating (A)	250
Max. permissible weight (kg)	680
Weight (kg)	4.50
Cat. no.	KSB250ZV1



Rating (A)	400
Max. permissible weight (kg)	680
Weight (kg)	5.00
Cat. no.	KSB400ZV1

Floor guide, used with the bottom support ⁽¹⁾

Rating (A)	All
Qty included	5
Weight (kg)	0.70
Cat. no.	KSB1000ZV2


Floor supports ⁽²⁾

Designation	Set of 2 floor supports	Cantilever arm, 200 mm
Rating (A)	All	All
Max. permissible weight (kg)	440	220
Mounting	Floor or cantilever arm	Wall
Qty included	1	4
Weight (kg)	1.80	0.40
Cat. no.	KSB1000ZV3	KFBCA81200



(1) For floors higher than 3.5 metres, it is advised to use two guides per floor.

(2) For floors higher than 3.5 metres, it is advised to use a floor guide in addition to the support.


Dimensions




55 mm ≤ Z ≤ 105 mm
KSB●●●ZV1



65 mm ≤ A ≤ 95 mm
KSB1000ZV2

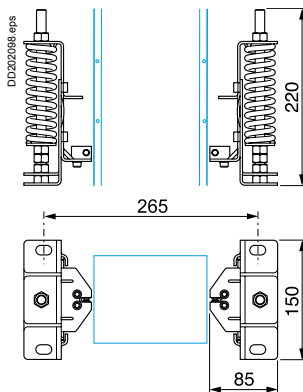

KSB1000ZV3

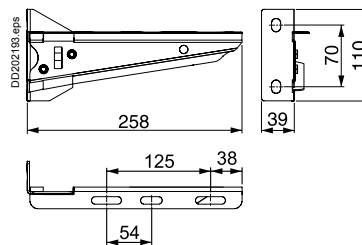

KFBCA81200

Catalogue numbers

Dimensions

IP55

U_e = 230...690 V

RAL 9001 white

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Canalis KS, 100 to 400 A

Medium-power busbar trunking for multi-storey building

Rising mains



Tap-off units

Use the standard tap-off units (page 186).

Accessories





Catalogue numbers

Lead sealing kit




Rating (A)	All	
For	Feed unit cover and jointing screws	Tap-off outlets
Qty included	20	20
Weight (kg)	0.0035	0.002
Cat. no.	KSB1000ZP1	KSB1000ZP2

Spare parts





Designation	Electrical and mechanical jointing unit	IP55 outlet plug	Sprinkler proofing accessory
Rating (A)	100 to 250	100 to 400	100 to 400
Qty included	1	15	1
Weight (kg)	1.60	0.015	1
Cat. no.	KSA250ZJ4	KSB400ZB1	KSB400ZB2

Dimensions



KSA●●●ZJ4

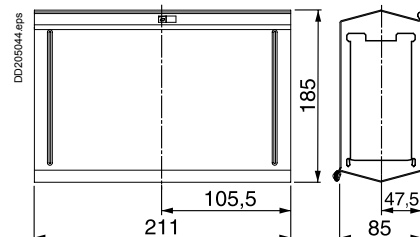

KSB400ZB2

Please refer to the Canalis
KS catalogue, reference
DEBU026EN,
available on schneider-
electric.com

Canalis KS, 500 to 1000 A


Medium-power busbar trunking for multi-storey building

Rising mains

Straight lengths with tap-off outlets - multi-storey building

Catalogue numbers

Right lengths



Rating (A)	500		630		800		1000	
Length (mm)	2000	2500	2000	2500	2000	2500	2000	2500
Number of tap-off outlets	3	4	3	4	3	4	3	4
Weight (kg)	25.20	30.70	25.30	30.80	30.50	37.00	38.60	47.10
Cat. no.	KSA500EV4203	KSA500EV4254	KSA630EV4203	KSA630EV4254	KSA800EV4203	KSA800EV4254	KSA1000EV4203	KSA1000EV4254


Note: it is also possible to use standard 1.5 metre long straight lengths (KSA●●●ED4156).

Distribution length at foot of riser




Rating (A)	500 to 630	800 to 1000
Length (mm)	800	800
Number of tap-off outlets	1	1
Weight (kg)	12.10	18.20
Cat. no.	KSA630ED4081	KSA1000ED4081

Fire barriers without tap-off outlets




Rating (A)	500	630	800	1000
Length Dim. l (mm)	900 to 2340	900 to 2340	900 to 2340	900 to 2340
Barrier position Dim. x (mm)	450 to 1890	450 to 1890	450 to 1890	450 to 1890
Weight (kg)	16.60	18.00	19.50	24.20
Cat. no.	KSA500ET4AF	KSA630ET4AF	KSA800ET4AF	KSA1000ET4AF


Dimensions




KSA●●●EV4254



KSA●●●EV4203



KSA●●●ED4081



900 ≤ l ≤ 2340 mm
450 ≤ x ≤ 1890 mm
KSA●●●ET4AF

Catalogue numbers

Dimensions

IP55

U_e = 230...690 V

RAL 9001 white

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Canalis KS, 500 to 1000 A


Medium-power busbar trunking

for multi-storey building

Rising mains


Components for changing direction - Elbow

Catalogue numbers

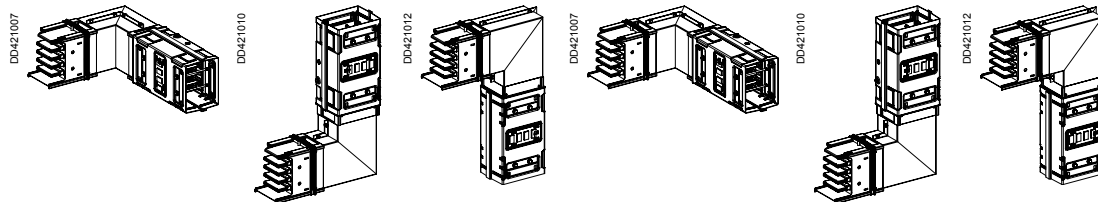

Rating (A)	500 to 630		800 to 1000			
Direction (edgewise)	Left or right	Upward	Downward	Left or right	Upward	Downward
Weight (kg)	13.40	12.10	12.10	19.00	16.70	16.70
Cat. no.	KSA630DLC40	KSA630DLE40	KSA630DLF40	KSA1000DLC40	KSA1000DLE40	KSA1000DLF40

Dimensions

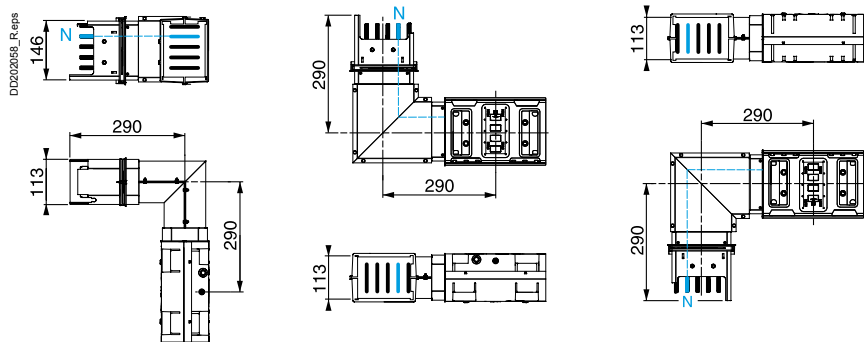

KSA...DLC40



KSA...DLE40

KSA...DLF40

Note: other changes in direction can be made on special order, please consult us.


Feed units (supplied with end cover)

Catalogue numbers




Designation	End feed unit		Flange feed unit			
Rating (A)	500 to 630		800 to 1000		500 to 630	800 to 1000
Mounting	Right	Left	Right	Left	Left or right	Left or right
Connection	Lugs (M12 screws)	Lugs (M12 screws)	Lugs (M12 screws)	Lugs (M12 screws)	Bars (2 x M10 screws)	Bars (2 x M10 screws)
Max. size (mm²)	Flexible or rigid	1 x 300 or 2 x 240	1 x 300 or 2 x 240	4 x 240 4 x 300	-	-
Weight (kg)		18.50	18.50	24.50	4.70	6.60
Cat. no.		KSA630ABD4	KSA630ABG4	KSA1000ABD4	KSA1000ABG4	KSA630AE4 KSA1000AE4


Dimensions

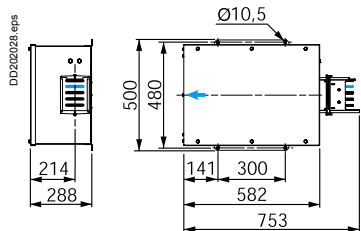


KSA630ABG4

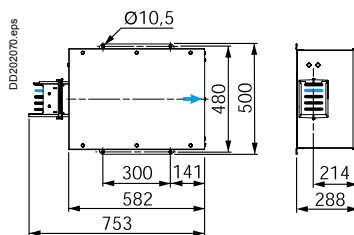

KSA630ABD4

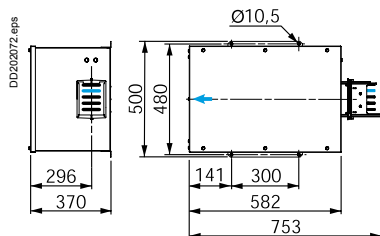


KSA1000ABG4

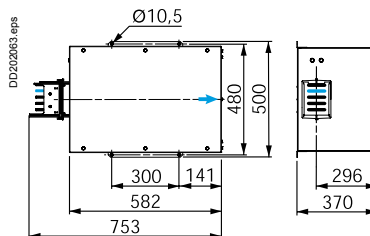


KSA1000ABD4

→ Cable exit

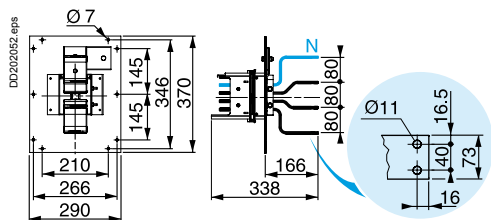

KSA630AE4

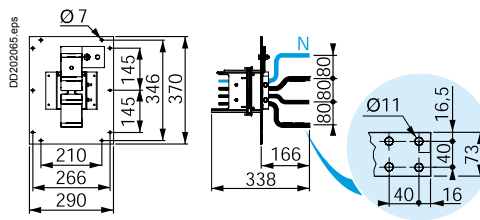

KSA1000AE4

Catalogue numbers

Dimensions

IP55

U_e = 230...690 V

RAL 9001 white

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Canalis KS, 500 to 1000 A



Medium-power busbar trunking for multi-storey building

Rising mains

Fixing system


Catalogue numbers

Bottom support




Rating (A)	500 to 630	800 to 1000
Max. permissible weight (kg)	1760	1760
Weight (kg)	7.00	7.30
Cat. no.	KSB630ZV1	KSB1000ZV1

Floor guide, used with the bottom support



Rating (A)	All
Qty included	5
Weight (kg)	0.70
Cat. no.	KSB1000ZV2

Floor support⁽²⁾




Designation	Set of 2 floor supports	Cantilever arm, 200 mm
Rating (A)	All	
Max. permissible weight (kg)	440	220
Mounting	Floor or cantilever arm	Wall
Qty included	1	4
Weight (kg)	1.80	0.40
Cat. no.	KSB1000ZV3	KFBCA81200

(1) For floors higher than 3.5 metres, it is advised to use two guides per floor.


(2) For floors higher than 3.5 metres, it is advised to use a floor guide in addition to the support.

Dimensions

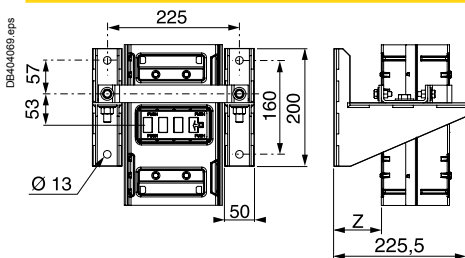


55 mm ≤ Z ≤ 105 mm

KSB●●●ZV1




65 mm ≤ A ≤ 95 mm

KSB1000ZV2

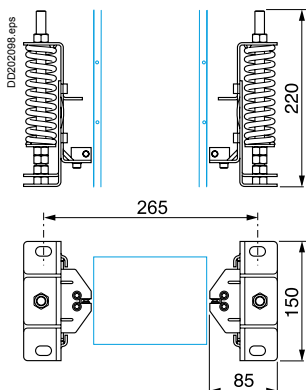

KSB1000ZV3

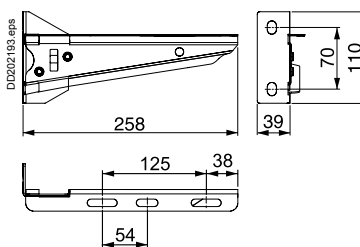

KFBCA81200

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com



Tap-off units

Use the standard tap-off units (page 186)

Accessories




Catalogue numbers

Lead sealing kit




Rating (A)	All	
For	Feed unit cover and jointing screws	Tap-off outlets
Qty included	20	20
Weight (kg)	0.0035	0.002
Cat. no.	KSB1000ZP1	KSB1000ZP2

Spare parts





Designation	Electrical and mechanical jointing unit		IP55 outlet plug	Sprinkler proofing accessory
Rating (A)	500 to 630	800 to 1000	500 to 1000	500 to 1000
Qty included	1	1	15	1
Weight (kg)	3.50	4.50	0.020	1
Cat. no.	KSA630ZJ4	KSA1000ZJ4	KSB1000ZB1	KSB1000ZB2


Dimensions



KSA630ZJ4

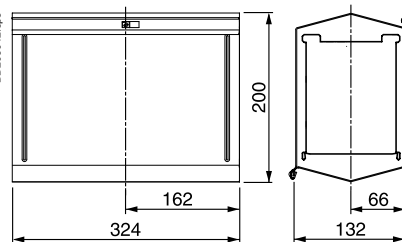

KSB1000ZB2



Installation

IP55

Ue = 230..0.690 V

RAL 9001 white


Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com

Canalis KS, 100 to 1000 A


Busbar trunking for medium power distribution

Assembly of trunking components

Mounting the bottom support

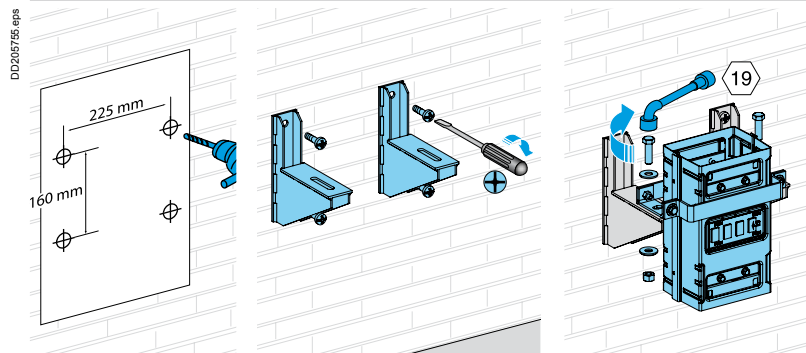


Connecting the feed-unit

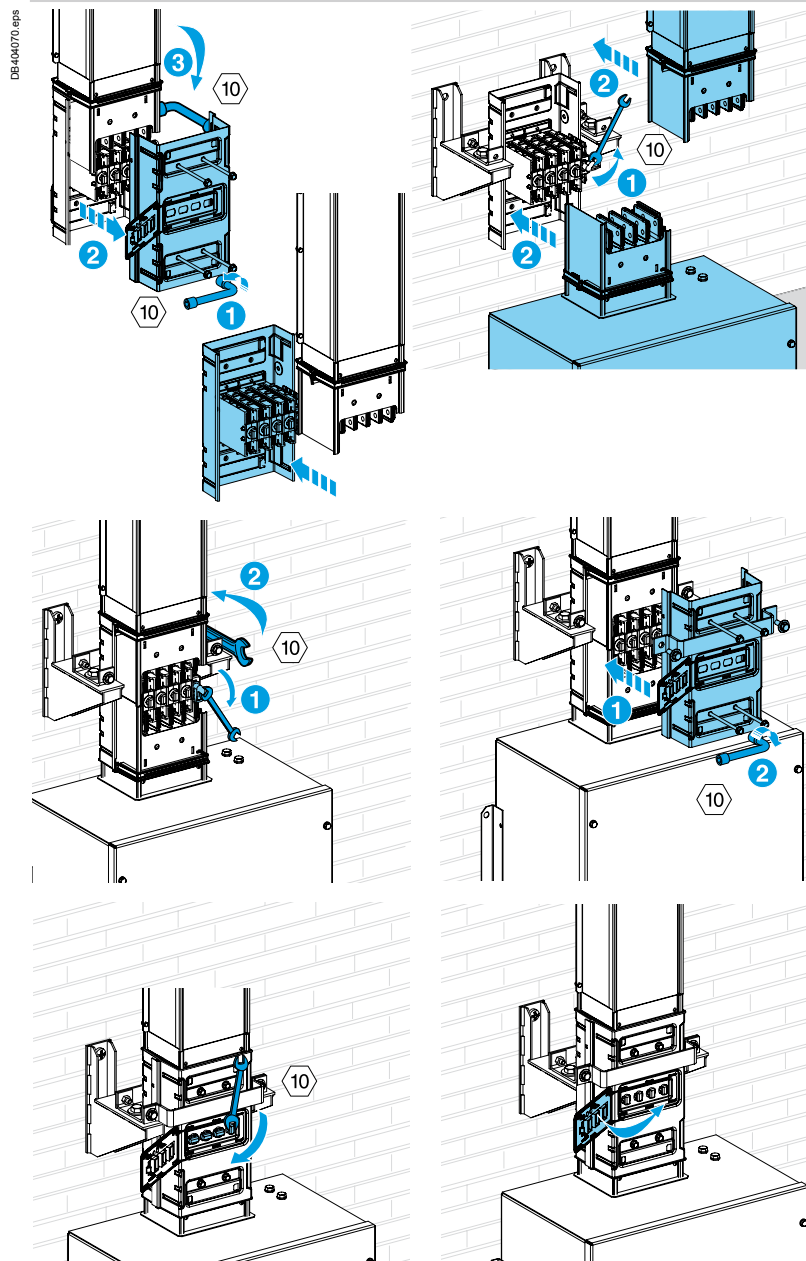

Please refer to the Canalis KS catalogue, reference DEBU026EN, available on schneider-electric.com


Mounting the fire barrier

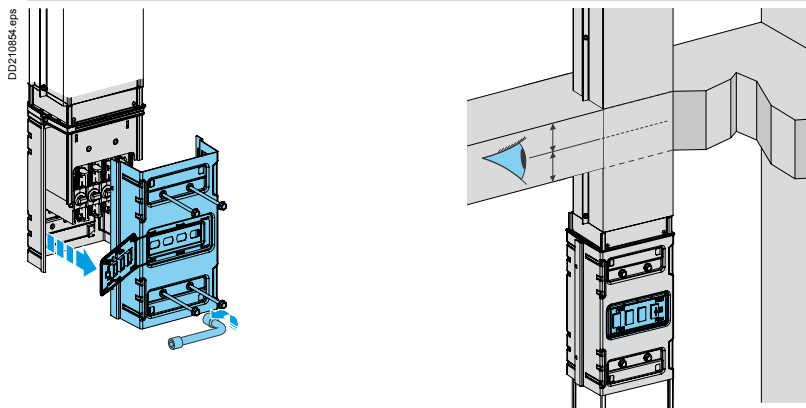


Assembling the straight lengths

For the assembling of Canalis KS risers, see page 220

Position of the tap-off outlets

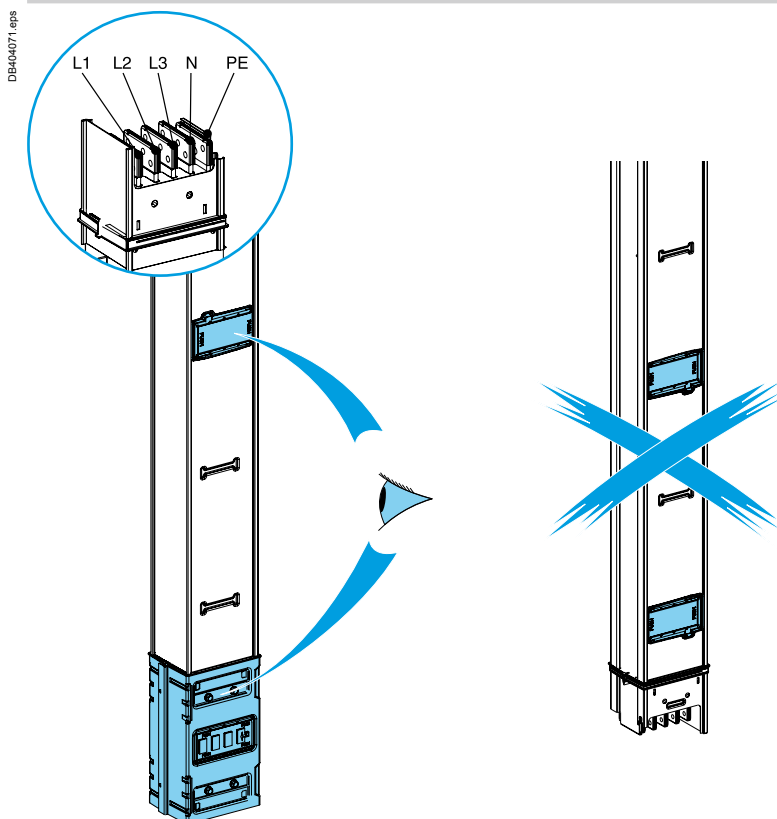

Fixing Canalis KS in the brackets

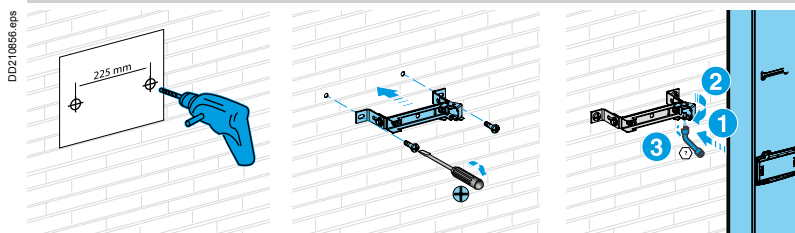

Mounting the tap-off units

For the mounting of Canalis KS tap-off units, see page 200

<i>Index</i>	3
<i>Introduction</i>	9
<i>Design guides and characteristics</i>	29
<i>Canalis KDP</i>	57
<i>Canalis KBA</i>	79
<i>Canalis KBB</i>	99
<i>Canalis KN</i>	121
<i>Canalis KS</i>	153
<i>Canalis KS riser</i>	205

Presentation

Canalis KTA from 800 to 4000 A	226
For horizontal transport and distribution	226
<i>Technical specifications</i>	231
<i>Maintenance</i>	239
<i>Recommendations for special applications</i>	243
<i>Catalogue numbers</i>	273
<i>Canalis worldwide</i>	279

<Standard>transc&aron

PD202228_rW&eps



Run sections

- Rating: 800 to 4000 A.
- Transport sections:
 - fixed lengths: 2 and 4 meters
 - non-standard lengths: 0.5 and 3 meters
- Distribution sections:
 - fixed lengths: 2 and 4 meters.

PD202213_rW&eps



Interface connections

- Pre-fabricated interfaces connections can be incorporated into:
 - Prisma and Okken switchboards
 - France Transfo dry-type transformers.

PD202431_r&eps





Universal supply connections

- Supply connections allow the busbar trunking to be connected to the switchboard's busbar or to the transformer.

PD202317_rW&eps




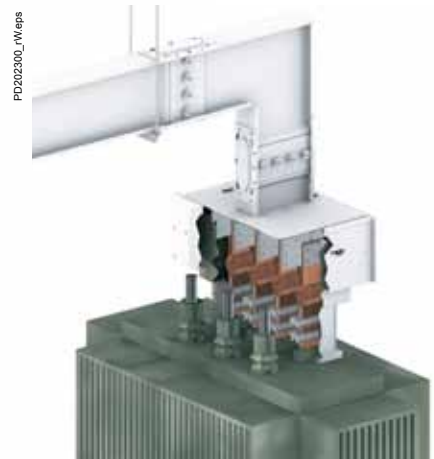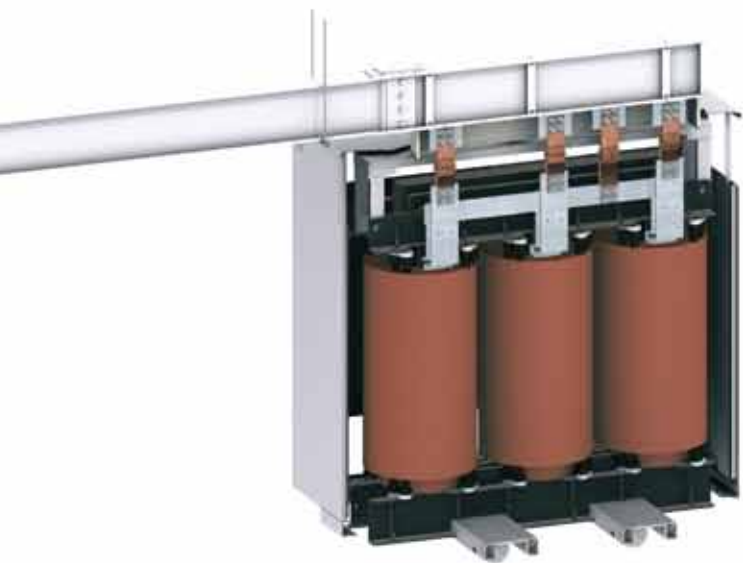

Change-of-direction sections

- Change-of-direction sections adapt to all busbar trunking requirements.
- There are both fixed and made-to-measure lengths.

PD202315_rWeps

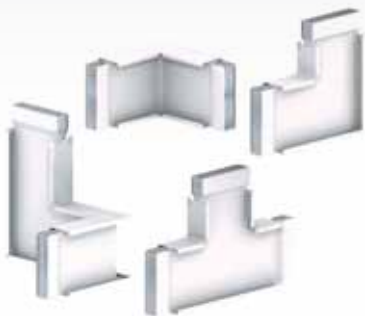

Horizontal fixing supports

- There are two types of support for installing the busbar trunking horizontally.
- One type of fixing: to fix the busbar trunking to its support.

PD202318_rWeps



Tap-off units

- Canalis KS plug-on tap-off units are compatible with the Canalis KT busbar trunking:
 - protection by 25 to 400 A fuses
 - protection by 100 to 400 A Compact NSX circuit breakers.
- Canalis KT fixed tap-off units:
 - protection by 400 to 1250 A Compact NS and NSX circuit breakers
 - protection by 400 to 1000 A fuses.

PD202314_rWeps



Canalis KT busbar trunking

For high power feeders and distribution from 800 to 5000 A



No toxic emission in case of fire

All components in the KT range are **halogen free** and contain **no PVCs**. In case of fire, Canalis KT does not release smoke or toxic gases. Canalis KT is also a **basic fire barrier**. The trunking thus contributes to containing a fire by preventing the propagation of flames for two hours.

DD202141_r_eps



A high degree of protection

Canalis KT busbar trunking offers an **IP55** degree of protection. It is designed to prevent the entry of water from fire protection **sprinklers**. This high degree of protection means it can be installed in all types of buildings and in all positions.

DD202142_r_eps



Excellent contact

Excellent contact is ensured by the use of **Copral-inside** technology. The electrical contacts are made of a silver-plated aluminium/copper laminate (Copral). The initial performance level is maintained throughout the entire life of the installation.

PD0202241_rw_eps



Easy installation

The equipment comes ready to install. Easy to connect and test, the trunking solution cuts installation time in half compared to cable solutions. In addition, the small size of Canalis KT reduces the space requirements to a minimum.

Installation eps



Unmatched upgrading

Canalis KT makes it fast and easy to upgrade the installation. Tap-off units can be added or removed on live installations, without stopping operations.

Total safety

An interlocking device prevents mounting errors and makes it impossible to install or remove an energised tap-off unit. **IPxxD** ensures totally safe working conditions for maintenance personnel because live parts are not accessible.

DD202145_r1epps



Tools and assistance, by your side

Our staff and tools are available to help you in choosing and installing Canalis KT busbar trunking. Our specialists and our production and distribution centres guarantee fast service and quality.



A large range of tap-off units

Tap-off units of the Canalis KS range are totally compatible with those of the Canalis KT range:

- they cover all your needs:
- Canalis KS tap-off units: 25 A to 400 A
- Canalis KT tap-off units: 400 A to 1250 A
- protection is possible using circuit breakers or fuses.

Intelligent tap-off units

- They monitor the installation to avoid overloads and ensure continuity of service.
- They can meter the energy consumed for precise management of your electrical distribution system (cost allocation for each consumer)


PD202314_r1Weps



<i>Index</i>	3
<i>Introduction</i>	9
<i>Design guides and characteristics</i>	29
<i>Canalis KDP</i>	57
<i>Canalis KBA</i>	79
<i>Canalis KBB</i>	99
<i>Canalis KN</i>	121
<i>Canalis KS</i>	153
<i>Canalis KS riser</i>	205
<i>Canalis KT</i>	225
Technical specifications	
Canalis KDP, 20 A	232
Canalis KBA, 25 and 40 A	233
Canalis KBB, 25 and 40 A	234
Canalis KN, 40 to 160 A	235
Canalis KS, 100 to 1000 A	236
Rising mains	237
<i>Maintenance</i>	239
<i>Recommendations for special applications</i>	243
<i>Catalogue numbers</i>	273
<i>Canalis worldwide</i>	279

Cable with prefabricated tap-offs for lighting distribution

PC202335.eps

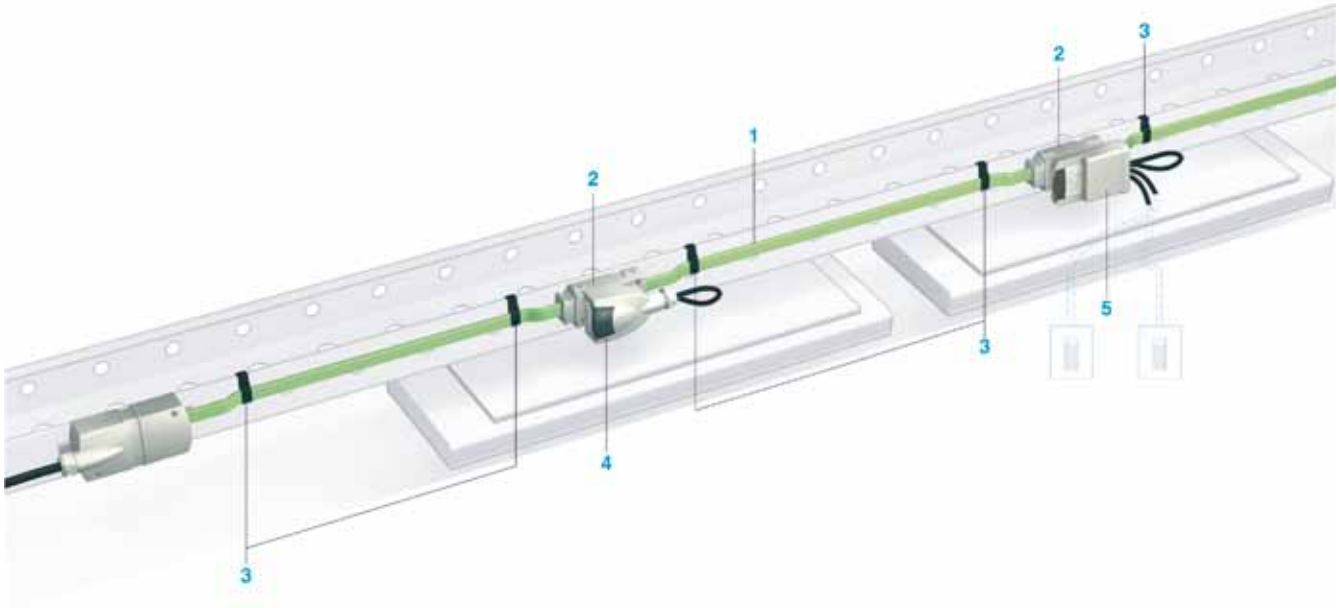

Complies with standards IEC 61439-6 and EN 61439-6.
 Complies with standard IEC 60502-1 for the cable (double insulation, 1000 V).
 Complies with sprinkler tests, guaranteeing operation under vertically and horizontally sprayed water for 50 minutes.

Degree of protection: IP55.
 Number of live conductors: 2 or 4.
 Rated insulation voltage: 690 V.
 Rated current (I_{nc}): 20 A.

Fire resistance

- Materials resistant to abnormal heat (glow-wire test as per IEC 60695-2).
- Class C2 for the halogen free version.

All plastic components are halogen free.

Straight lengths constitute the basic structure of the line and are made up of:

- a ribbon cable (1) with three or five 2.5 mm² conductors made of tinned copper. Conductor insulation and sheathing are made of cross-linked polyethylene (XLPE)
- tap-off outlets (2), factory fitted at regular intervals. Compliant with standard IEC 61439-6, they can supply luminaires under live conditions using KBA and KBB tap-off units.


Other line components:

- the fixing system (3) used to attach the line to the sides of cable trays, metal structures or directly to concrete slabs
- 10 A tap-off units (4), pre-wired or not, with phase selection, or 16 A tap-off units with or without fuses, used to supply luminaires under live conditions
- a range of prefabricated tap-off units for local control of luminaires for single and double-circuit switching, two-way switching and impulse switches.

Canalis KBA, 25 and 40 A

Busbar trunking for lighting distribution

PD202336R.eps

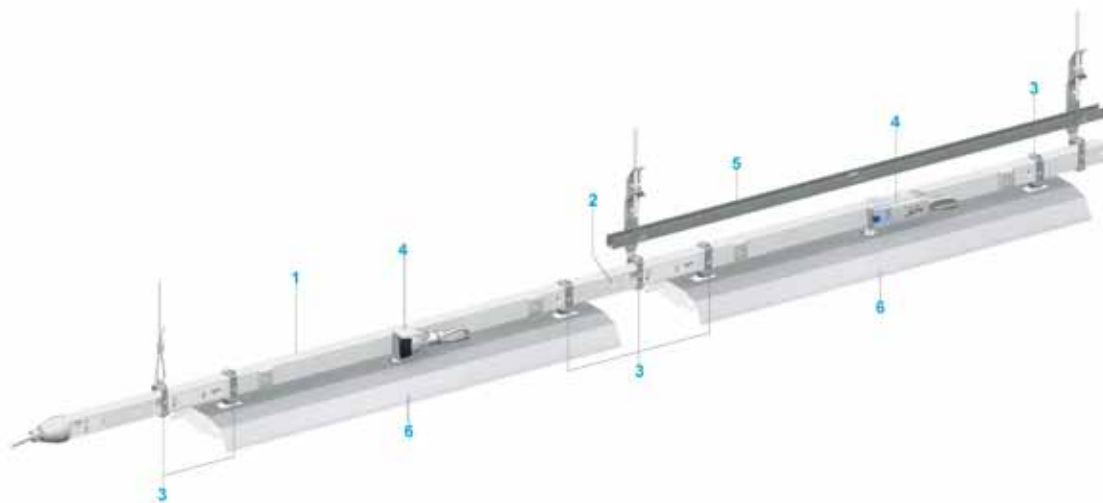

Complies with standards IEC 61439-6 and EN 61439-6.

Complies with sprinkler tests, guaranteeing operation under vertically and horizontally sprayed water for 50 minutes.

Degree of protection: IP55.

Number of live conductors: 2 or 4.

Rated insulation voltage: 690 02 A.

Rated current (Inc): 25 and 40 A.

Fire resistance

- Resistant to flame propagation in compliance with standard IEC 60332 - part 3.
- Materials resistant to abnormal heat (glow-wire test as per IEC 60695-2).

All plastic components are halogen free.

Straight lengths constitute the basic structure of the line and are made up of:


- a carrier casing (1), crimp closed, made of hot-galvanised sheet steel, pre-lacquered RAL 9003 white. This casing also serves as the protective earth conductor (PE)
 - a ribbon cable with two or four insulated conductors made of copper, 2.5 mm² for 25 A and 6 mm² for 40 A
 - tap-off outlets every 0.5, 1 or 1.5 metre, on both sides of the trunking
 - an additional twisted cable (2 x 0.75 mm², remote-control circuit) on request DALI compatible.
 - an electrical jointing unit ensuring automatic and simultaneous connection of all live conductors. The contacts are clamp + spring type and exert no forces on the plastic parts. The jointing unit is maintenance free
 - a mechanical jointing unit ensuring rigid assembly of two components.
- The continuity of the protection conductor is ensured automatically. Proper tightening at the end of the assembly operation is ensured by a captive screw with a notched base (2). The two components are instantly assembled. Electrical and mechanical jointing is carried out simultaneously.

Other line components:

- the fixing system (3) for supporting of both trunking and luminaires, with final automatic locking around the trunking.
- The maximum distance between two fixing points is three metres.
- The luminaires can be installed at any point on the line (including the jointing units),
- 10 A tap-off units (4), pre-wired or not, with phase selection, or 16 A tap-off units with or without fuses, used to supply luminaires under live conditions
 - the cable-support system (5) for running adjacent circuits such as telephone lines, emergency lighting, etc.
 - flexible lengths to change direction or avoid obstacles.

Busbar trunking for lighting distribution

PD202337R.eps

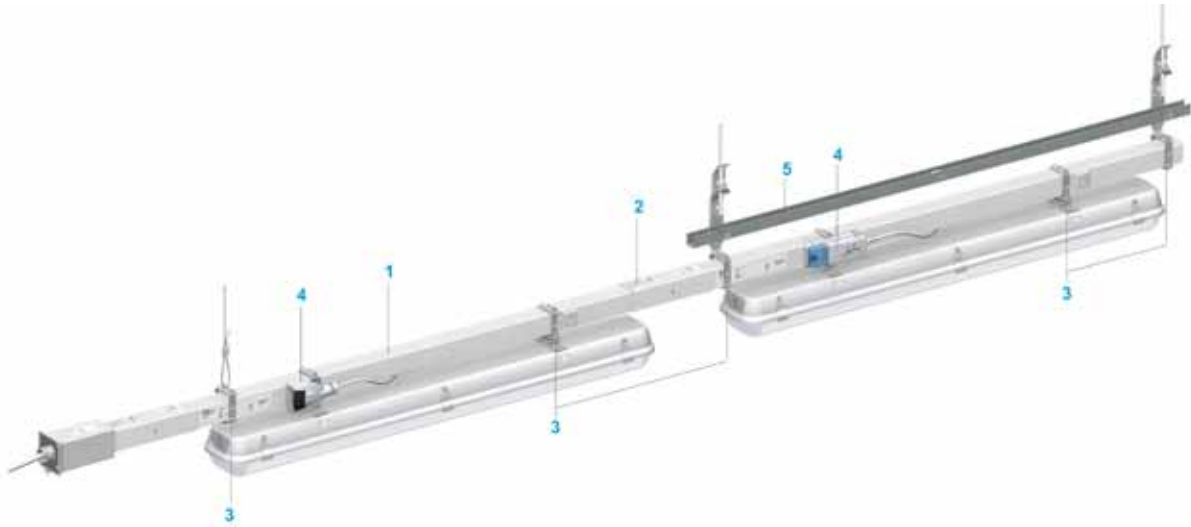

Complies with standards IEC 61439-6 and EN 61439-6.

Complies with sprinkler tests, guaranteeing operation under vertically and horizontally sprayed water for 50 minutes.

Degree of protection: IP55.

Number of live conductors: 2 or 4, 2 + 2, 2 + 4 or 4 + 4.

Rated insulation voltage: 690 V.

Rated current (I_{nc}): 25 and 40 A.

Fire resistance

- Resistant to flame propagation in compliance with standard IEC 60332 - part 3.
- Materials resistant to abnormal heat (glow-wire test as per IEC 60695-2).

All plastic components are halogen free.

Straight lengths constitute the basic structure of the line and are made up of:

- a carrier casing (1), crimp closed, made of hot-galvanised sheet steel, pre-lacquered RAL 9003 white. This casing also serves as the protective earth conductor (PE)
- one or two ribbon cables with two or four insulated conductors made of copper, 2.5 mm² for 25 A and 6 mm² for 40 A
- tap-off outlets every 0.5 or 1 metre, on both sides of the trunking
- an additional twisted cable (2 x 0.75 mm², remote-control circuit) on request DALI compatible
- an electrical jointing unit ensuring automatic and simultaneous connection of all live conductors. The contacts are clamp + spring type and exert no forces on the plastic parts. The jointing unit is maintenance free
- a mechanical jointing unit ensuring rigid assembly of two components.

The continuity of the protection conductor is ensured automatically. Proper tightening at the end of the assembly operation is ensured by a captive screw with a notched base.

The two components are instantly assembled.

Electrical and mechanical jointing is carried out simultaneously (2).

Other line components:

- the fixing system (3) for supporting of both trunking and luminaires, with final automatic locking around the trunking.

The maximum distance between two fixing points is five metres.


The luminaires can be installed at any point on the line (including the jointing units).

- 10 A tap-off units (4), pre-wired or not, with phase selection, or 16 A tap-off units with or without fuses, used to supply luminaires under live conditions
- the cable-support system (5) for running adjacent circuits such as telephone lines, emergency lighting, etc.
- flexible lengths to change direction or avoid obstacles.

Canalis KN, 40 to 160 A

Busbar trunking for low power distribution

PD202309_rV02.eps

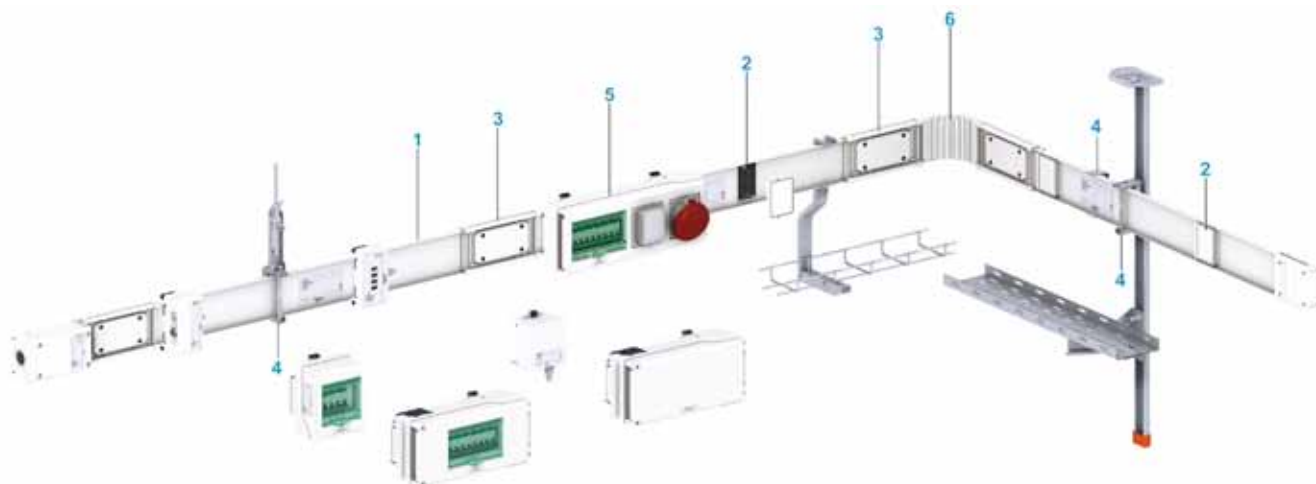

Complies with standards IEC 61439-6 and EN 61439-6.

Complies with sprinkler tests, guaranteeing operation under vertically and horizontally sprayed water for 50 minutes.

Degree of protection: IP55.

Number of live conductors: 4.

Rated insulation voltage: 500 V.

Rated current (Inc): 40 A, 63 A, 100 A and 160 A.

Fire resistance

- Resistant to flame propagation in compliance with standard IEC 60332 - part 3.
- Materials resistant to abnormal heat (glow-wire test as per IEC 60695-2).

All plastic components are halogen free.

Straight lengths constitute the basic structure of the line and are made up of:

- an enclosure (1), made of sheet steel, galvanised and painted RAL 9001, serving as the protective conductor (PE)

- four aluminium conductors supported along their entire length by an insulator.

All electrical contacts are made of silver-plated copper

- three additional copper conductors (3 x 2.5 mm², remote-control circuit) on request DALI compatible.

- tap-off outlets every 0.5 or 1 metre, on one side of the trunking. The tap-off outlets (2) are equipped with automatic shutters that avoid accidental contact with live parts

- a electrical jointing unit (3) with flexible contacts for the electrical junction between two components. These contacts are designed to adapt to the difference in expansion between the conductors and the enclosure

- an mechanical jointing unit (3) for the mechanical junction between two components with four captive screws that also ensure the continuity of the protective conductor. The jointing unit is maintenance free.

Other line components:

- the fixing brackets (4) designed for suspension or fixing to a wall every 3 metres (unless otherwise specified)

- the tap-off units (5) with the following characteristics:

- the contact of the protective conductor ensures automatic opening of the shutters and feeds the tap-off unit

- when the tap-off unit is plugged in, the earthing contact connects first, followed by the phases

- there is no access to live parts when the cover of the tap-off unit is open (no finger access, IPxxB)


- tap-off units can be equipped with fuses or modular device,

- trunking and tap-off units can be equipped with colour-coded interlocking devices to restrict connection to certain tap-off units

- flexible lengths (6) to change direction or avoid obstacles.

Busbar trunking for medium-power distribution

PD020340_rv12.eps

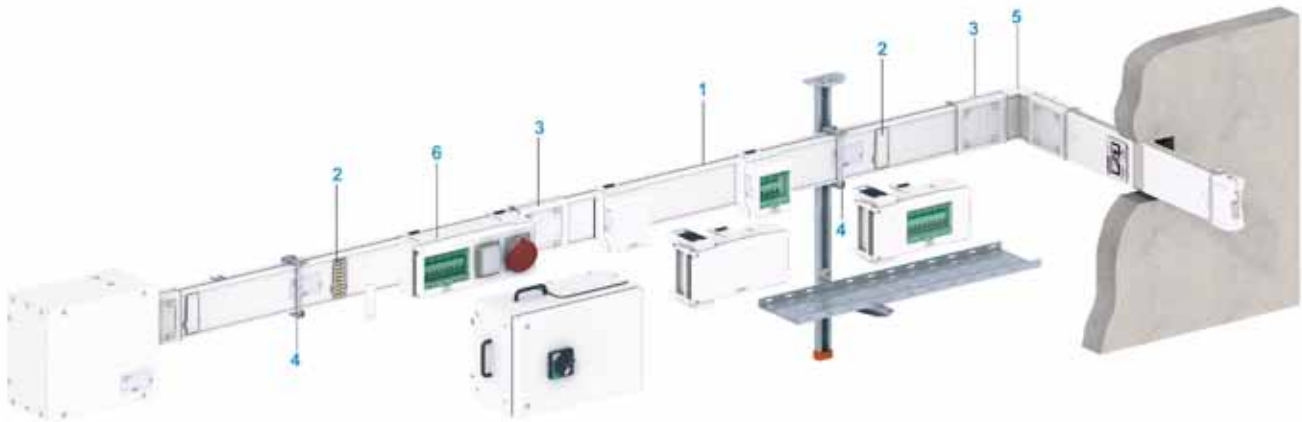

Complies with standards IEC 61439-6 and EN 61439-6.

Complies with sprinkler tests, guaranteeing operation under vertically and horizontally sprayed water for 50 minutes.

Degree of protection: IP55.

Number of live conductors: 4.

Rated insulation voltage: 690 V.

Rated current (I_{nc}): 100 A, 160 A, 250 A, 400 A, 500 A, 630 A, 800 A and 1000 A.

The cross-sectional area of the protective conductor is at least 50 % that of the phases.

Fire resistance

- Fire barriers as per standard ISO 834 (DIN 4102-part 9) for passages through partitions.
- Resistant to flame propagation in compliance with standard IEC 60332 - part 3.
- Materials resistant to abnormal heat (glow-wire test as per IEC 60695-2).


All plastic components are halogen free.

- The enclosure (1), made of sheet steel, galvanised and pre-lacquered RAL 9001 white.
- The four aluminium conductors are mounted on fibreglass reinforced polyester insulators. All electrical contacts are made of silver-plated copper.
- The straight lengths have a tap-off unit (2) every metre on both sides. The tap-off outlets are equipped with automatic shutters that avoid accidental contact with live parts. The protective conductor is electrically connected to the enclosure at each jointing unit,
- Electrical contact between two components is ensured by flexible contacts designed to adapt to the difference in expansion between the conductors and the enclosure. It is possible to check visually that the electrical contact is effective. The mechanical junction between two components is ensured by four captive screws. The jointing unit (3) is maintenance free.
- The rigidity of the straight lengths is sufficient that fixing points (4) are required only every three metres (excepting special conditions).
- Special components (5) are available to change direction or avoid obstacles.
- The tap-off units (6) have the following characteristics:
 - connection and disconnection are possible only with the cover open
 - the contact of the protective conductor ensures automatic opening of the shutters and feeds the tap-off unit
 - there is no access to live parts when the cover of the tap-off unit is open (no finger access, IPxxB)
 - when the tap-off unit is plugged in, the earthing contact connects first, followed by the phases
 - it is not possible to close the cover before the tap-off unit is mechanically locked on the trunking
 - tap-off units can be equipped with fuses, modular devices or moulded case circuit breakers.

Rising mains

Rising mains for power distribution in buildings with more than one floor

PD020341_01W.eps

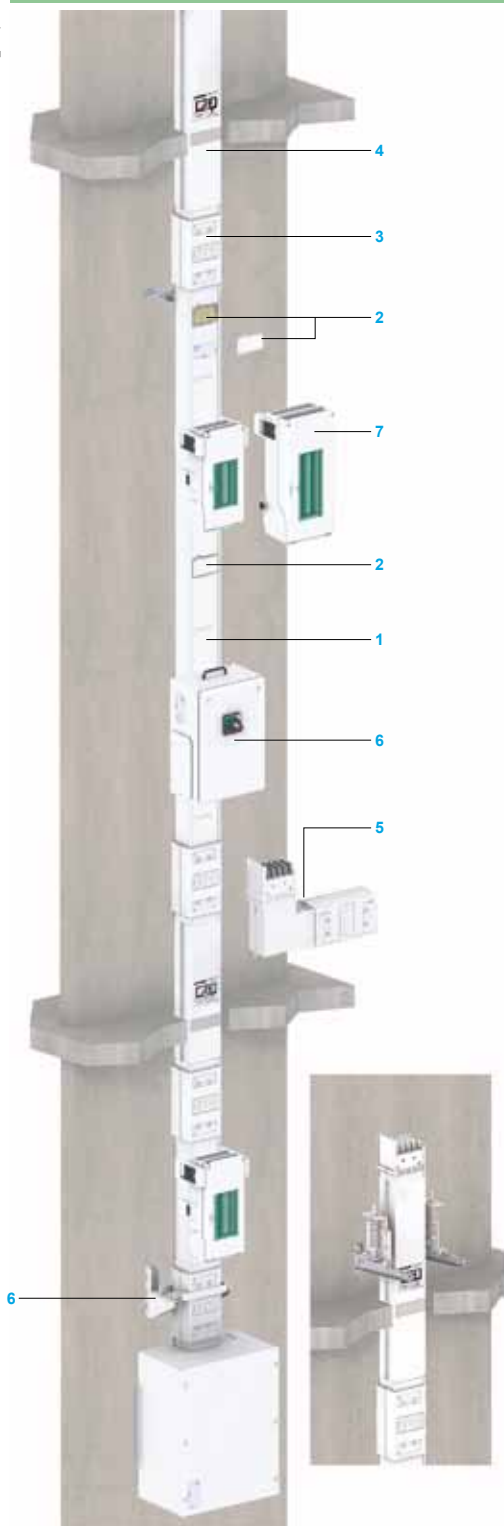

Complies with standards IEC 61439-6 and EN 61439-6.

Complies with sprinkler tests, guaranteeing operation under vertically and horizontally sprayed water for 50 minutes.

Degree of protection: IP55.

Number of live conductors: 4.

Rated insulation voltage: 690 V.

Rated current (Inc): 100 A, 250 A, 400 A, 500 A, 630 A, 800 A and 1000 A.

The cross-sectional area of the protective conductor is at least 50 % that of the phases.

Fire resistance

- Fire barriers as per standard ISO 834 (EN 1363-1, EN 1366-3) for passages through partitions (slabs for example).
- Resistant to flame propagation in compliance with standard IEC 60332 - part 3.
- Materials resistant to abnormal heat (glow-wire test as per IEC 60695-2).

All plastic components are halogen free.

■ The enclosure (1), made of sheet steel, galvanised and pre-lacquered RAL 9001 white.

■ The four aluminium conductors are mounted on fibreglass reinforced polyester insulators. All electrical contacts are made of silver-plated copper.

■ The straight lengths have a tap-off unit (2) every 0.5 metre on one side. There are four tap-off units per floor for floor heights between 3.5 and 4.8 metres, or three tap-off units per floor for floor heights less than 3.5 metres. The tap-off outlets are equipped with automatic shutters that avoid accidental contact with live parts. The protective conductor is electrically connected to the enclosure at each jointing unit.

■ Electrical contact between two components is ensured by flexible contacts designed to adapt to the difference in expansion between the conductors and the enclosure. It is possible to check visually that the electrical contact is effective. The mechanical junction between two components is ensured by four captive screws. The jointing unit (3) is maintenance free.

■ A fire barrier (4) can be installed when the riser passes through a slab to avoid any risk of fire propagation from one floor to another via Canalis KS trunking. Two-hour fire resistance (A120) is provided in compliance with standard ISO834.

■ Special components (5) are available to change direction or avoid obstacles.

■ The riser can be maintained by a special bottom support (6) or a spring-based fixing device on each floor of the building (depending on the height of the building).

■ The tap-off units (7) have the following characteristics:

- connection and disconnection are possible only with the cover open
- the contact of the protective conductor ensures automatic opening of the shutters and feeds the tap-off unit
- there is no access to live parts when the cover of the tap-off unit is open (no finger access, IPxxB)
- when the tap-off unit is plugged in, the earthing contact connects first, followed by the phases
- it is not possible to close the cover before the tap-off unit is mechanically locked on the trunking
- tap-off units can be equipped with modular devices or moulded case circuit breakers.




<i>Index</i>	3
<i>Introduction</i>	9
<i>Design guides and characteristics</i>	29
<i>Canalis KDP</i>	57
<i>Canalis KBA</i>	79
<i>Canalis KBB</i>	99
<i>Canalis KN</i>	121
<i>Canalis KS</i>	153
<i>Canalis KS riser</i>	205
<i>Canalis KT</i>	225
<i>Technical specifications</i>	231
Maintenance	
Maintenance recommendations for your installation	240
<i>Recommendations for special applications</i>	243
<i>Catalogue numbers</i>	273
<i>Canalis worldwide</i>	279

Maintenance of Canalis lighting systems

Maintenance of Canalis KDP, KBA and KBB trunking components

KBA and KBB are similar in design and consequently have the same maintenance requirements.

DD205757W/eps

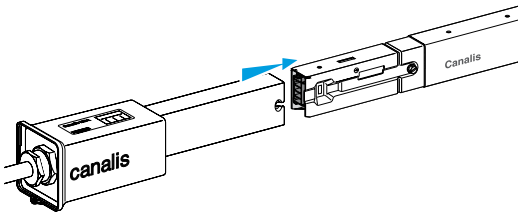


Feed units

They are equipped with anti-shear tunnel terminals for copper cables up to 10 mm². As for all screw-type connections, it is advised to check tightness one year after installation and then at longer intervals.

For KBA and KBB trunking, the feed units are jointed to the first run component of the line (see next paragraph). This connection is maintenance free.

DD205758W/eps

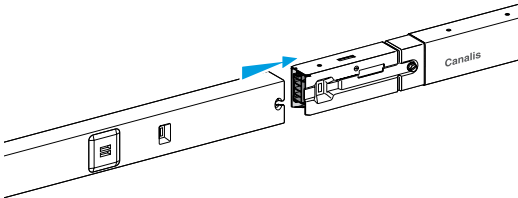

Run components

For Canalis KDP, the run components are one-piece lengths drawn from a 192-metre reel. No joints are required.

For Canalis KBA and KBB, run components are interconnected by electrical jointing units ensuring automatic and simultaneous connection of all live conductors.


The contacts are clamp + spring type and exert no forces on the plastic parts.

The electrical contacts of the jointing unit and the conductors are made of copper.

Components can be dismantled and reused.

Run components for all types of busbar trunking are maintenance free.

DE40472W/eps

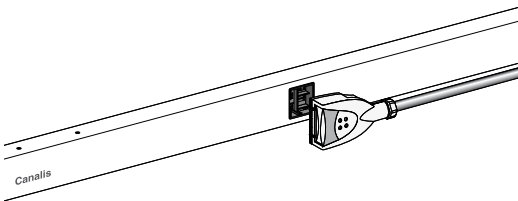

Tap-off units

They are the clamp type, made of bronze with tinned beryllium to ensure optimum mechanical rigidity and contact quality. The contacts do not press or apply any forces on the plastic parts. They connect to the active line conductors at the tap-off outlets. The conductors are made of tinned copper.


These components are maintenance free.

For Canalis KBA and KBB, circuits supplied by the 16 A tap-off units are connected via tunnel terminals. As for all screw-type connections, it is advised to check tightness one year after installation and then run checks at longer intervals.

Maintenance on power-distribution lines

Maintenance of Canalis KN trunking components

DD202238 eps

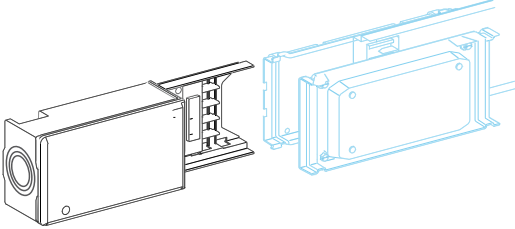


Feed units

They are equipped with junction blocks for copper cable up to 16 mm² for 63 A and for lugs (M8) for 100 A units. As for all screw-type connections, it is advised to check tightness one year after installation and then run checks at longer intervals.

The feed units are jointed to the first run component of the line (see next paragraph). This connection is maintenance free

DD202239 eps

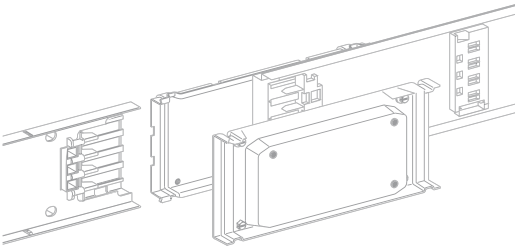

Run components


They are interconnected by electrical jointing units ensuring automatic and simultaneous connection of all live conductors.

The contacts are clamp + spring type and exert no forces on the plastic parts. The electrical contacts of the jointing unit and the conductors are silver-plated copper.

This type of sliding connection is maintenance free.

Components can be dismantled and reused.

DD202764 eps

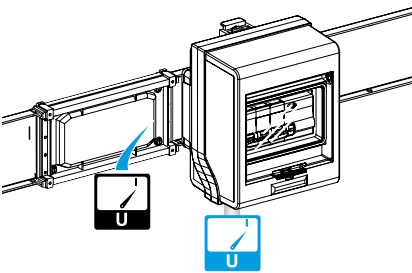

Tap-off units


Trunking contacts are flexible, made of silver-plated clamps providing optimum contact quality. The contacts do not press or apply any forces on the plastic parts. They connect to the live line conductors at the tap-off outlets. Conductors are made of silver-plated copper at the point of contact.

These components are maintenance free.

The connections for outgoing cables are made to terminals or using lugs.

As for all screw-type connections, it is advised to check tightness one year after installation and then run checks at longer intervals.

DB404073 eps

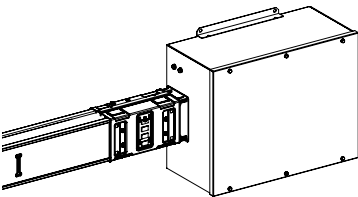


Feed units

They are equipped with terminals up to 100 A and lug connectors for higher ratings. As for all screw-type connections, it is advised to check tightness one year after installation and then run checks at longer intervals.

The feed units are jointed to the first run component of the line (see next paragraph). This connection is maintenance free

DB404055 eps

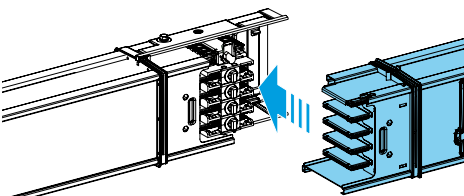

Run components


They are interconnected by electrical jointing units ensuring automatic and simultaneous connection of all live conductors.

The contacts are clamp + spring type and exert no forces on the plastic parts.

The electrical contacts of the jointing unit for the conductors are silver-plated copper. **This type of sliding connection is maintenance free.**

Components can be dismantled and reused.

DD202303 eps



Tap-off units

Trunking contacts are flexible, made of silver-plated clamps providing optimum contact quality. The contacts do not press or apply any forces on the plastic parts.

They connect to the live line conductors at the tap-off outlets. Conductors are made of silver-plated copper at the point of contact.

These components are maintenance free.

The connections for outgoing cables are made to terminals or using lugs.

As for all screw-type connections, it is advised to check tightness one year after installation and then run checks at longer intervals.

Other recommendations

Maintenance of devices

For all devices installed in Canalis tap-off units, follow the manufacturer's instructions (as for installation in a switchboard).

Visual check

Cleaning

It is advised to check annually that trunking is clean and to remove any dust, water, oil or other conducting substances or objects from sensitive zones such as junctions, tap-off outlets and tap-off units.

External appearance

Check the external appearance of the trunking to detect:

- signs of shocks, in which case it is necessary to check the degree of protection to avoid any risk of insulation faults
- anomalies, i.e. incorrect implementation of the trunking (incorrect supports, etc.)
- traces of corrosion (in particular on supports).

Reuse after exposure to water

If a Canalis line is exposed to water during installation, it is necessary to measure the insulation resistance of the line by isolating the supply and the loads.

- If $R < 0.69 \text{ M}\Omega$, the installation must not be energised:
 - cut the line in two by removing the jointing unit in the middle
 - locate the faulty zone
 - remove all jointing covers and dry the parts using compressed air
 - continue until the insulation resistance is greater than $0.69 \text{ M}\Omega$
 - the system can then be energised.

Recommendations for special applications

<i>Index</i>	3
<i>Introduction</i>	9
<i>Design guides and characteristics</i>	29
<i>Canalis KDP</i>	57
<i>Canalis KBA</i>	79
<i>Canalis KBB</i>	99
<i>Canalis KN</i>	121
<i>Canalis KS</i>	153
<i>Canalis KS riser</i>	205
<i>Canalis KT</i>	225
<i>Technical specifications</i>	231
<i>Maintenance</i>	239

Recommendations for special applications

Direct current	244
Frequencies	246
400 Hz	246
Fire resistance	247
Harmonic currents	249
How Canalis compensate for thermal expansion	251
Sprinkler test certification	254

Coordination

Trunking protection	256
Overload protection	256
Short-circuit protection	258
Circuit breaker/trunking coordination	259
Non-limiting or time-delayed circuit breakers	259
Limiting circuit breakers	260
BTS protection by Compact NSX limiting circuit breakers	261
Selection guides	262

Recommendations for special applications

Lighting control with Canalis KNT	265
Self-contained emergency lighting units	266
Lighting with dimming control	268
Lighting controlled by proximity sensors	270
Lighting management solution incorporating the main functions	271
Measurements and metering	272
Canalis part of StruxureWare	272
<i>Catalogue numbers</i>	273
<i>Canalis worldwide</i>	279

Determining the DC current value

Thermal effect

Rule

The total power dissipated as heat must remain constant in the duct:

$$P_{ac} = P_{dc}$$


Where:

- the power dissipated as heat: $P_{ac} = 3 \times R \times I_{ac}^2$ with:
 - R = resistance of a conductor
 - I_{ac} = conductor rms current
- the dissipated power for 4 conductors: $P_{dc} = 4 \times R \times I_{dc}^2$ with:
 - I_{dc} = direct current.

Selection table


- 1 source.

Case of 2 conductors in parallel for the + and 2 conductor in parallel for the - (only 1 circuit in the busbar trunking):

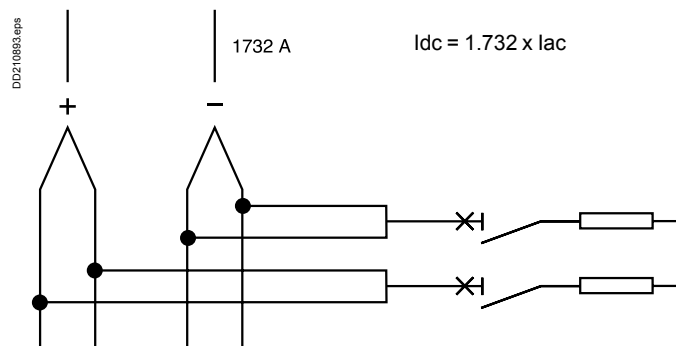

- 2 sources.

Case of 1 conductor for the + and 1 conductor for the - (2 circuits possible in the same busbar trunking):

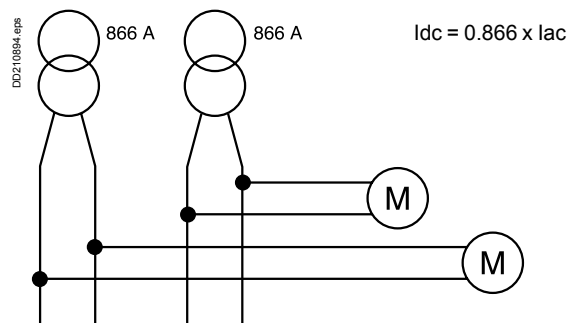

Rating (A)	1 source	2 sources
100	173	87
160	277	139
250	433	217
400	693	346
500	866	433
630	1091	546
800	1386	693
1000	1732	866

Protection

With DC, there is no zero crossing point of the voltage and current to facilitate arc extinction in the protective device.

The arcing time is longer and the energy that has to be absorbed is higher than for AC.

The voltage of the DC arc must rise to the source voltage very quickly in order to "put out" the short-circuit current.

"Shortened" electrical equation: $U_{\text{network}} = R \times I_{\text{sc}} + U_{\text{arc}}$ where:

- $I_{\text{sc}} = U_{\text{network}} - U_{\text{arc}} / R$
- $I_{\text{sc}} = 0$ when $U_{\text{arc}} = U_{\text{network}}$.

Use with specific switchgear

A quick rise in arcing voltage can be achieved by using series fuses, one fuse on the + and one fuse on the – of each circuit.

For some current rating and fuse characteristics, the placing of two fuses in series on each polarity may be specified (highly inductive circuit).

In some cases, two fuses must be placed in parallel for each polarity.

KS busbar trunking derating at 400 Hz

Values at 35 °C.
Application of a derating coefficient at 400 Hz combined with that for temperature derating.

Busbar trunking derating at 400 Hz								
	KSA100	KSA160	KSA250	KSA400	KSA500	KSA630	KSA800	KSA1000
In (A)	92	146	221	342	403	514	621	745
Coefficient K at 400 Hz	0.92	0.91	0.88	0.85	0.81	0.82	0.78	0.74

Voltage drop

3-phase voltage drop, in millivolts per metre and per amp 400 Hz with load spread over the run.
For a concentration of load at the end of a run (transport), the voltage drops are double those shown in the table below.

Voltage drop when frequency is 400 Hz in millivolts per meter and per ampere								
	KSA100	KSA160	KSA250	KSA400	KSA500	KSA630	KSA800	KSA1000
Cos Φ = 1.0	0.992	0.641	0.550	0.388	0.225	0.226	0.201	0.160
Cos Φ = 0.9	0.975	0.627	0.546	0.388	0.223	0.225	0.200	0.159
Cos Φ = 0.8	0.968	0.622	0.545	0.387	0.222	0.224	0.200	0.159

Conductor characteristics

Conductor impedance at 400 Hz								
	KSA100	KSA160	KSA250	KSA400	KSA500	KSA630	KSA800	KSA1000
Average ohmic resistance of phase and neutral conductors at In Rb1ph (mΩ/m)	1.564	0.687	0.320	0.249	0.120	0.118	0.113	0.110
Average resistance at In Xph (mΩ/m)	1.203	1.207	1.264	0.942	0.535	0.551	0.506	0.405

Fire resistance

As required by standards, busbar trunking complies with:

- 1 - material resistance to abnormal temperatures
- 2 - flame propagation resistance
- 3 - fire barrier function when going through a partition wall
- 4 - conservation of all circuits for 1 h30 in an insulating sheath.

Definition of tests

1 - Insulating material resistance test to abnormal temperatures

Objective

To check a material will not be suspected as being the origin of a secondary fire outbreak.

As defined in standards § 9.2 IEC 61439-6 and IEC 60695-2-10 and 2-13.

Method

Application of an incandescent wire for 30 seconds on the insulating materials in contact with live parts.

Result criteria

The specimen is considered to have passed the incandescent wire test if:

- if there is no visible flame and no sustained incandescence
- the specimen's flames and incandescence go out within 30 seconds of the incandescent wire being removed.

2 - Flame propagation resistance test

Objective

To check a busbar trunking will not create secondary fire outbreaks.

As defined in standards § 9.101 IEC 61439-6 and IEC 60332 part 3.

Method

- Application of a flame for 40 minutes on a straight length of busbar trunking whose centre is located 2.5 metres from the edge of the burner.

Result criteria

The specimen is considered to have passed the test if:

- combustion does not occur
- the maximum extent of the burned part (external and internal) of the busbar trunking does not go beyond 2.5 metres above the lower edge of the burner.

3 - Fire barrier test through a partition wall

Objective

To check a busbar trunking will not propagate a fire from one room to another by crossing a fire barrier wall for 60, 120, 180, or 240 minutes.

As defined in standard EN 1366-3; EN 1363-1; ISO 834; DIN 4102 part 9.

Method

The fire barrier busbar trunking section to be tested is placed in an oven which executes a standardised temperature-time curve.

Result criteria

The specimen is considered to have passed the test if:

- there are no flames behind the fire barrier
- there is no smoke or gas behind the fire barrier (not requested by the standard; can appear as a remark in the test report)
- the temperature rise of the casing behind the fire barrier does not exceed 180 °C.


Harmonic currents

Origin of harmonic currents

Harmonic currents are caused by non-linear loads connected to distribution systems, i.e. by loads that draw current with a waveform different that that of the voltage that supplies them.

The most common non-linear loads are equipment including rectifiers, fluorescent lighting and computer hardware.

In installations with a distributed neutral, non-linear loads may cause significant overloads in the neutral conductor due to the presence of third-order harmonics.

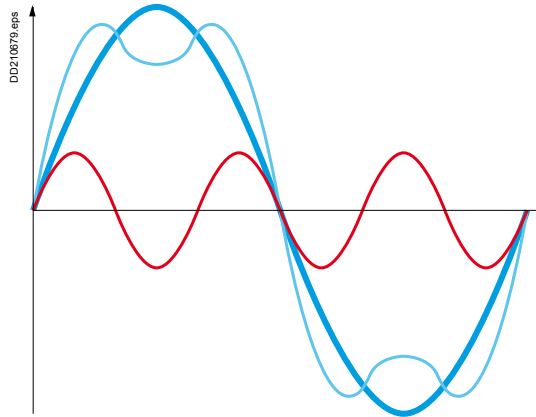

Harmonic order

The order is the ratio between the harmonic frequency f_n and the fundamental frequency (generally the power frequency, 50 or 60 Hz):
 $n = f_n / f_1$

By definition, the fundamental f_1 is order 1 (H1).

Third-order harmonics (H3) have a frequency of 150 Hz (when $f_1 = 50$ Hz).

Estimating THD (total harmonic distortion)

The presence of third-order harmonics depends on the applications involved. It is necessary to carry out an in-depth study on each non-linear load to determine the level of H3:

$$ih3 (\%) = 100 \times i3 / i1$$

- $i3$ = rms current of H3
- $i1$ = rms current of the fundamental

Assuming that H3 is preponderant among harmonics, the THD is close to the value of H3 ($ih3 (\%)$).

There are two decisive factors:

- the types of connected devices:
 - disturbing loads: fluorescent lighting, computer hardware, rectifiers, arc furnaces, etc.
 - non-disturbing loads: heating, motors, pumps, etc.
- the ratio between the two types of disturbing loads.



Workshops

Mix of disturbing loads (computers, UPSs, fluorescent lighting) and non-disturbing loads (motors, pumps, heating).

Low probability of harmonics

THD \leq 15 %.




Offices

Numerous disturbing loads (computers, UPSs, fluorescent lighting).

High probability of harmonics


15 % < THD \leq 33 %.

Effects of harmonics on Canalis busbar trunking



Fundamental frequency: i_{h1} (50 Hz)


No current in the neutral.
The conductors are correctly sized.



Fundamental frequency: i_{h1} (50 Hz) and 33 % of H3


Abnormal temperature rise in the conductors caused by current at a higher frequency in the phases (skin effect) and current in the neutral caused by summing of the H3 harmonics.

The only effective solution



Fundamental frequency: i_{h1} (50 Hz) and 33 % H3

Reduce the current density in ALL conductors by using appropriately sized trunking.



Busbar-trunking selection

THD ≤ 15 %	15 % < THD ≤ 33 %	THD > 33 %	Busbar trunking	Rating (A)
25	20	16	KBA / KBB	25
40	32	25	KBA / KBB	40
			KN	40
63	50	40	KN	63
100	80	63	KN	100
			KS	100
160	125	100	KS	160
250	200	160	KS	250
400	315	250	KS	400
500	400	315	KS	500
630	500	400	KS	630
800	630	500	KS	800
1000	800	630	KS	1000

Example: for a total rms current of 376 A, (estimation based on power drawn by loads, including harmonics), the operational current is 400 A.
THD is estimated at 30 %. The appropriate trunking is KS500 A.

For more information on harmonics

See the Cahier Technique publications on the Schneider Electric web site:
www.schneider-electric.com

How Canalis compensate for thermal expansion

Foreword

Prefabricated electrical trunking components expand and contract due to:

- changes in ambient temperature (e.g. summer and winter)
- current flowing in the conductors (e.g. 0 to I_n).

For example, consider a 30 metre long 800 A Canalis KS line equipped with ten 160 A tap-off units and installed under the roof of a building where the ambient temperature varies by more than 30 °C between summer and winter:

- just the change in the ambient temperature results in an expansion of 20 mm for the conductors and the 10 mm for the casing
- at a constant ambient temperature, the temperature rise in the conductors every morning when the installation is started (increase in current from 0 to $I_n = 800$ A) results in an expansion of 55 mm for the conductors and 7 mm for the casing.

The lengths of the sheet steel (1) and the aluminium conductors (2) therefore vary as a function of the changes in temperature and their specific thermal expansion coefficients.

PD20209_1W.eps




For this reason, Canalis components are designed so that these phenomena do not affect their installation or operation.

How Canalis trunking components effectively compensate for the effects of conductor thermal expansion.

Inside a trunking section, the conductors are fixed (1) at a single point in the casing and, due to the change in temperature, expand (→) on either side of that point. The zones affected by expansion and considered critical from the electrical standpoint are the jointing system (2) and tap-off outlets (3).


DD20281_1eps

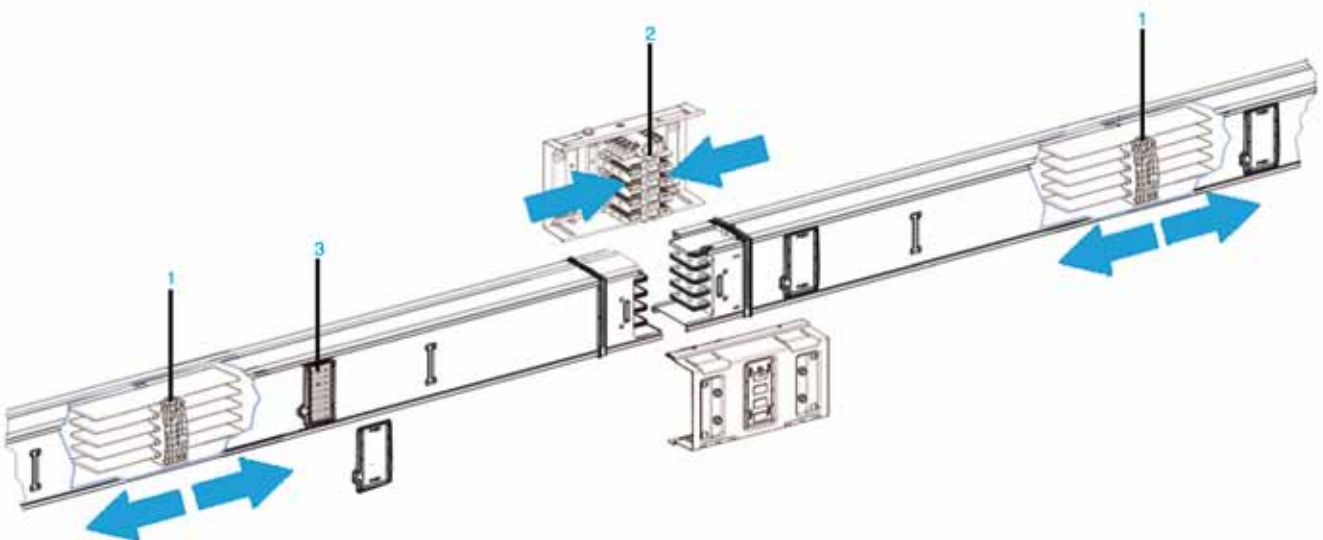

How Canalis compensate for thermal expansion


■ The Canalis jointing system mechanically and electrically connects components (e.g. two straight lengths), but allows for the expansion and contraction of the conductors (4).

The system is made up of springs (1) and an area of sliding contacts (2) that allow conductor movement (→) while maintaining outstanding electrical contact. Contact quality is ensured by two parts made of silver-plated copper (3). Sufficient pressure between the two parts for good contact is maintained by the springs. This system is used at each end of the straight lengths, every three metres.

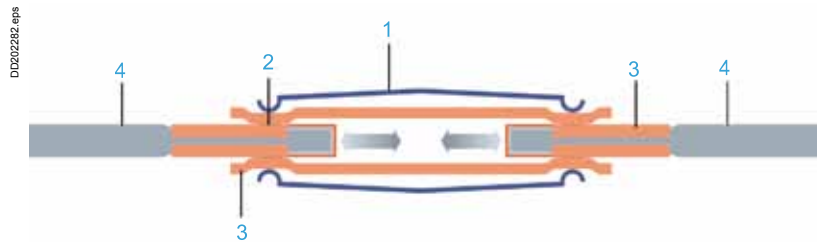

■ At the tap-offs, conductor expansion is compensated for by a contact zone (4) made of silver-plated copper on which the clamps of the tap-off unit can slide.

- 1 Spring of clamps.
- 2 Copper area.
- 3 Silver plated copper.

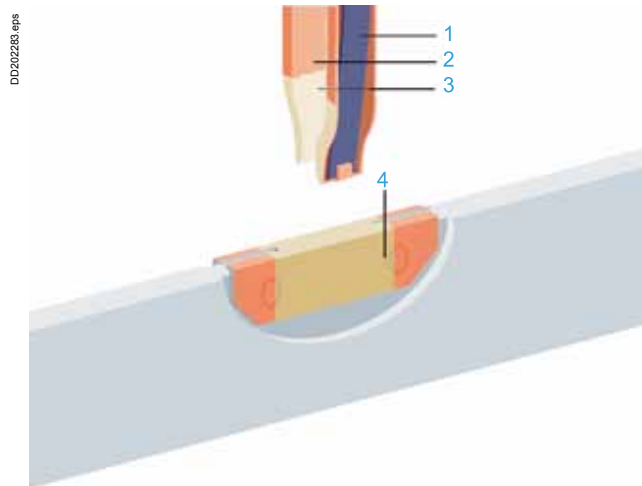

Conclusion: at both the jointing system and the tap-off outlets, sliding contacts can handle the expansion of the conductors.

These maintenance-free silver-plated contacts are guaranteed for life.

Only the expansion of the sheet steel must be taken into account for Canalis installation, however the problem is minor because both trials and calculations show that expansion is only approximately 1 mm for every three-metre length under extreme operating conditions.

Few precautionary measures used to compensate for the effects of thermal expansion in the casing, depending on how the line is installed.

Horizontal line

For a trunking line made up exclusively of straight lengths, as noted above, the effects of thermal expansion are not significant (only 1 mm for 3 m).

To avoid all risk of problems, Canalis trunking supports allow movement of the casing, i.e. no fixed points.

For a fixed point caused by a blocked elbow, for example, the casings compensate their expansion by slight lateral movement (0.7 mm maximum) on either side of the longitudinal axis. This movement has no impact on the contact quality of the jointing system or on the IP.

Conclusion: the only precautionary measure is to prevent distortion by avoiding having a number of fixed points on a single line.



PD0202310_rV1eps

Vertical line (rising mains)

The effects of thermal expansion depend on the different installation methods.

Rising mains with just one bottom support (1)

With a bottom support attached to the wall, the riser expands upwards. At each floor, the sheet steel slides naturally through the floor.

The only precautionary measure is to avoid creating any other fixed points.

Rising mains with spring-based fixing devices (2)


For rising mains with spring-based fixing devices only, the riser expands both upwards and downwards. At each floor, the casing sides naturally through the fire barriers.

Rising mains with more than one bottom support (1)

More than one bottom support should not be used on a single riser to avoid creating a number of fixed points that block thermal expansion of the casing, in which case a component in the line may break.

If more than one bottom support is necessary, it is advised to break the riser into a number of sections, interconnected by cables and feed boxes, to allow thermal expansion (see section "above on Rising mains with just one bottom support").


Installation of rising mains does not require any particular precautionary measures. All the above solutions have been simulated by calculations and tested in a laboratory. Schneider Electric guarantees that they will maintain the safety and reliability of your installation.

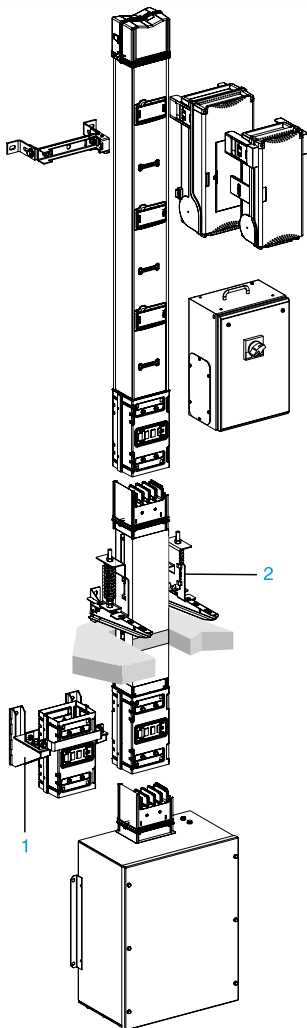

DD0202285_eps

What is a sprinkler?

DD209665_reps

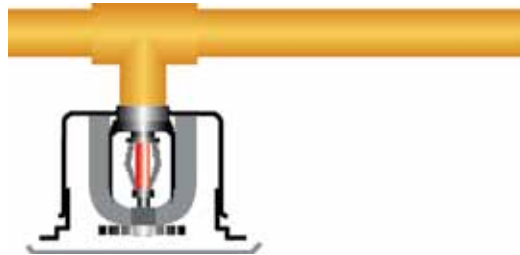

A sprinkler is a sprinkling device blanked off by a heat-sensitive component. It is designed to deliver water when the temperature to which it is subjected exceeds its calibration value.

The main aim of the installation is to lower the temperature in the accident area by wetting the ignited and adjacent materials by spraying water in the form of fine droplets.

The transformation of these droplets into water vapour captures a lot of energy from the fire and extinguishes it quickly. Moreover, this increased volume prevents air from flowing to the heart of the fire.

When a fire develops, ambient temperature rises to reach the calibration value. Water then leaves the sprinkler opening and strikes a deflector that projects it onto the fire in a certain form. Ground coverage ranges between 9 and 12 m² according to mounting height.

A sprinkler delivers between 60 and 120 l/min according to the hazard class.

On nuisance tripping lasting a few minutes, some hundreds of litres of water are released. IPx5 approval as per standard IEC 60529 does not guarantee non ingress of water in the busbar trunking in these conditions, as the water volumes, test duration and projection distance vary (nozzle 22.5 mm in diameter, at a distance of 2.5-3 m, with a water volume of 12.5l/min for 1min/m² for at least 3 min).

To provide you with all necessary safety guarantees, Schneider Electric has chosen to go further still than the IP55 test by subjecting its busbar trunking to an extremely severe "sprinkler" test.

PD202443_reps



Canalis KBA supplying luminaires nearby sprinklers.

Sprinkler test procedure

PD20242W.eps



Canalis KS and sprinkler.

Chronology

In view of the absence of reference standard for sprinkler tests, we have chosen to apply the following procedure:

- insulation resistance test (1000 V)
- dielectric properties test (2.5 kV, 5 s: IEC 61439-1 & 2)
- water projection
- 5 min break
- insulation resistance test (1000 V)
- dielectric properties test (2.5 kV, 5 s: IEC 61439-1 & 2).


Water projection,

2 configurations, with or without energisation:

- horizontally installed busbar trunking:
 - 15 min water projection with sprinkler type K-Wert 115, NF ¾, 7.5 bar, 314 L/min
 - 35 min water projection with sprinkler type K-Wert 115, NF ¾, 1 bar, 115 L/min
- vertically installed busbar trunking:
 - 15 min water projection with sprinkler type K-Wert 80, NF ½, 7.5 bar, 314 L/min
 - 35 min water projection with sprinkler type K-Wert 80, NF ½, 1 bar, 80 L/min.

Mounting position


The distance between the sprinkler head and the busbar trunking is 500 mm.

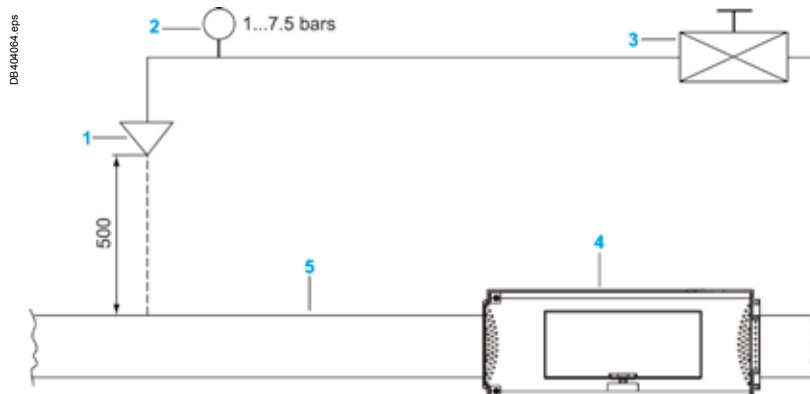

DB-404064.eps

- 1 Sprinkler
- 2 Pressure gauge
- 3 Closing valve
- 4 Tap-off unit.
- 5 Busbar trunking

Test configuration

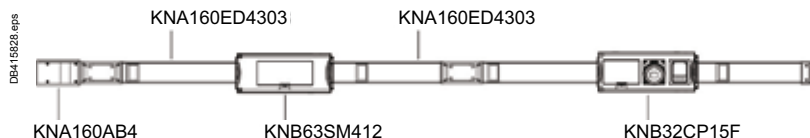

DB-119328.eps

Test results

Busbar trunkings KDP, KBA, KBB, KN and KS have undergone the sprinkler test. This test, if successful, proves that our busbar trunkings can operate during and immediately after sprinkling of a line by a sprinkler for a period of 50 min.

Selection of busbar trunking with respect to protective device ratings

The busbar trunking rating can be optimised when the trunking is protected by circuit breakers rather than fuses.

To take into account busbar trunking thermal overload protection, the various protection switchgear technologies and the currents under overload conditions must be considered.

The sizing characteristics for the choice of busbar trunking and overload protection are:

- I_n trunking = load current $\times f_1 \times k_2$
- f_1 : temperature coefficient
- k_2 : derating factor linked to the type of switchgear:
 - fuse: $k_2 = 1.1$
 - circuit breaker: $k_2 = 1$.

Example:



For a load current = 400 A with an ambient temperature of 35 °C:

- fuse protection:
 - I_n trunking = load current $\times f_1 \times k_2 = 400 \times 1 \times 1.1 = 440$ A
 - The recommended trunking is KSA500 (I_n trunking = 500 A).
- circuit breaker protection:
 - I_n trunking = load current $\times f_1 \times k_2 = 400 \times 1 \times 1 = 400$ A
 - The recommended trunking is KSA400 (I_n trunking = 400 A).

Due to their design, circuit breaker thermal settings are more precise.

Explanations

- Calibration of thermal asymptotes:
 - distribution fuses are calibrated to trip for overloads of between **1.25 and 1.6 times** their rated current
 - circuit breakers are calibrated to trip for overloads of between **1.05 and 1.3** (1.2 for circuit breakers with electronic protection) times their current setting.

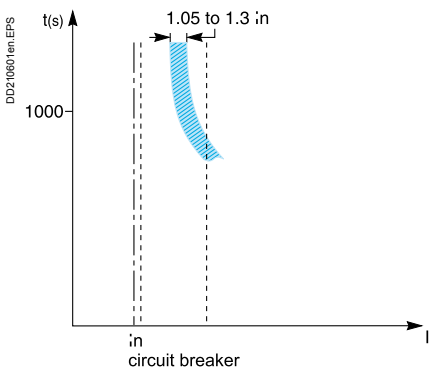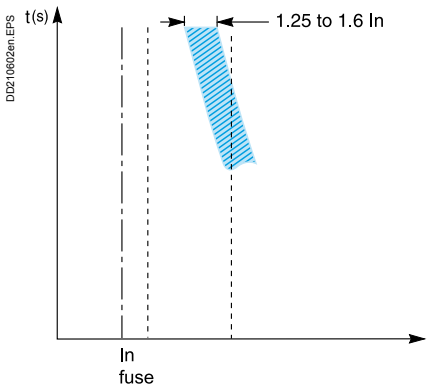

Thermal-setting precision

- The fuse is assigned a fixed rating. A change in the current to be protected requires fuse replacement. **The difference between 2 fuse ratings is approximately 25%.**

Standard ratings are given according to the series of characteristic numbers of the "Renard" series.

For example: 40 - 50 - 63 - 80 - 100 - 125 - 160 - 200 - etc.

- **the circuit breaker offers a setting precision of:**

- 5 % for circuit breakers equipped with conventional **thermal-magnetic** trip units,
- 3 % for circuit breakers equipped with **electronic** trip units.

For example, a circuit breaker with a nominal rating of 100 A can easily be set to values of $I_r = 100\text{ A}$, 95 A, 90 A, 85 A, 80 A.

Example:

a circuit breaker with a nominal rating of 100 A set to 90 A will be used to protect KSA100 busbar trunking (I_n trunking = 100 A) which is used for an ambient temperature of 50 °C.

Extensive setting range of circuit breakers equipped with electronic trip units

Circuit breakers equipped with electronic trip units offer an extended range of settings:

- thermal protection I_r adjustable from 0.4 I_n to I_n
- short-circuit protection from 2 I_r to 10 I_r .

Example:


a 250 A circuit breaker (NSX250N equipped with an STR22SE) can easily be set up for:

- thermal protection from 100 to 250 A

- short-circuit protection from 200 to 2500 A.

Advantages:

- This ensures a high degree of flexibility with respect to:
 - modifications (flexibility), extensions (upgradeability): protective devices can be easily adapted to the application requiring protection and to the system earthing arrangement used (protection of life and property)
 - maintenance: use of this type of device considerably reduces maintenance component stocks.

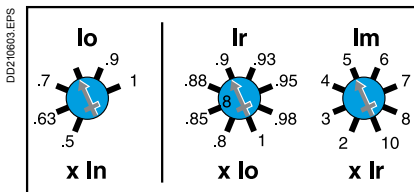

Example of setting possibilities.

Trunking characteristics

Busbar trunking systems must meet all rules stipulated in standards IEC 61439-1 and 61439-2.


- With respect to short-circuits, BTS sizing is determined by the following characteristics:
 - **rated peak withstand current I_{pk} (kA):**
this characteristic expresses the instantaneous electrodynamic withstand limits of the busbar trunking. The peak current value is often the most restrictive instantaneous characteristic for the protective device
 - **maximum rms short-time withstand current I_{cw} (kArms/...s):**
this characteristic expresses the permissible temperature-rise limit of conductors over a given period of time (0.1 to 1 s)
 - **thermal stress in A^2s :**
this characteristic expresses the instantaneous thermal stress withstand of the BTS. Normally, if the short-circuit generates fault conditions that are compatible with the first two characteristics, this constraint is “automatically satisfied”.

Circuit breaker characteristics

A circuit breaker must meet the requirements of product construction standards (IEC 60947-2, etc.) and installation standards (IEC 60364 or applicable country standards), i.e. its breaking capacity $I_{cu}^{(1)}$ must be greater than short-circuit current I_{sc} at the point where it is installed.


(1) installation standard IEC 60364 and the construction standards specify that the breaking capacity of a circuit breaker is:
 - the ultimate breaking capacity, I_{cu} , if it is not coordinated with an upstream protective device
 - the breaking capacity enhanced by cascading, if there is coordination with the upstream protective device.

Characteristics of the circuit-breaker/ trunking combination



When the busbar trunking is directly protected, selection of the protective device must take into account the following requirements:

- circuit breaker $I_{cu} \geq$ prospective I_{sc} at **point A**
- BTS $I_{peak} \geq$ limited or asymmetrical prospective I_{sc} at **point A**
- BTS thermal withstand at $I_{cw} \geq$ thermal stress passing through the BTS.

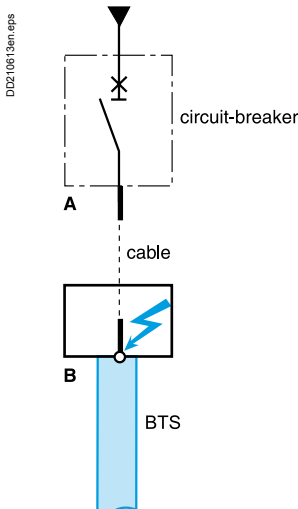

When the busbar trunking is protected downstream of a cable, selection of the protective device must take into account the following requirements:

- circuit-breaker $I_{cu} \geq$ prospective I_{sc} at **point A**
- BTS $I_{peak} \geq$ limited or asymmetrical prospective I_{sc} at **point B**
- BTS thermal withstand at $I_{cw} \geq$ thermal stress passing through the BTS.

Circuit breaker/trunking coordination

Non-limiting or time-delayed circuit breakers

Either non-limiting (instantaneous or time-delayed) or time-delayed limiting circuit breakers can be used. They are mainly air-type power (= 800 A) circuit breakers. **This type of circuit breaker is used to implement time discrimination and is often combined with KT type trunking.**

■ The busbar trunking must be capable of withstanding the peak fault current to which it may be subjected as well as the thermal stress during any time delay:

□ the permissible peak current, I_{peak} , of the BTS must be greater than the peak value of the prospective asymmetrical short-circuit current at point A.

The value of the asymmetrical short-circuit current is obtained from the value of the symmetrical short-circuit current, I_{sc} , multiplied by a standardised asymmetry factor (k).

The value of the first short-circuit asymmetry peak in the transient state is taken into account.


Standardised table for asymmetrical short-circuit calculations

I_{sc} : prospective symmetrical short-circuit kA (rms value)	Asymmetry factor k k
$4.5 \leq I \leq 6$	1.5
$6 < I \leq 10$	1.7
$10 < I \leq 20$	2.0
$20 < I \leq 50$	2.1
$50 < I$	2.2


For example, for a circuit with a prospective short-circuit current of 50 kA rms, the first peak reaches 105 kA ($50 \text{ kA} \times 2.1$). See the figure opposite.

□ the short-time withstand current I_{cw} of the BTS must be greater than the current I_{sc} flowing through the installation for the duration of the short-circuit, (duration T = total breaking time, including the time delay if applicable).

If one of these criteria is not satisfied, the rating of the busbar trunking to be used must be increased.

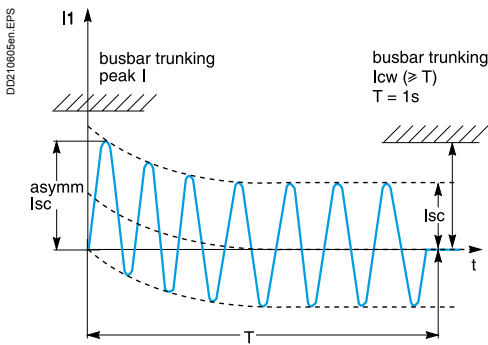

Current value of the 1st. peak as a function of rms I_{sc} .

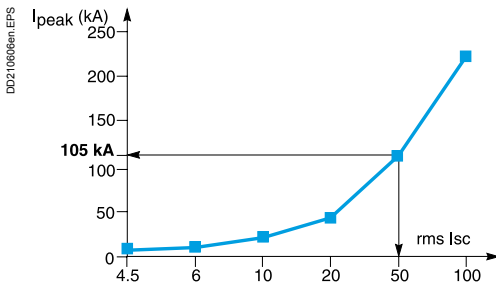

Transient and steady states of a short-time short-circuit.


Circuit breaker/trunking coordination

Limiting circuit breakers


This mainly concerns protection of BTSs by moulded-case circuit breakers (≤ 1600 A).

This type of circuit breaker is used for energy discrimination and is therefore often combined with Canalis KN and KS trunking.

- In this case, the BTS must withstand the peak current limited by the protective device and the corresponding thermal stress.
 - The current limited (I_{peak}) by the circuit breaker must be less than the peak current permitted in the BTS.
 - The thermal stress limited by the circuit breaker must be less than the thermal stress permitted in the BTS.

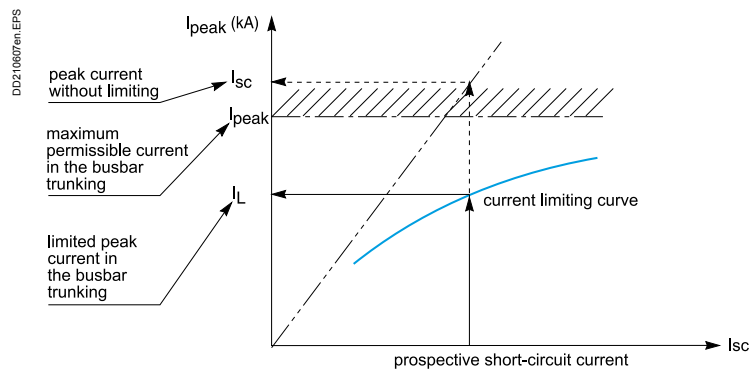

Checking the BTS withstand capacity in terms of peak current.

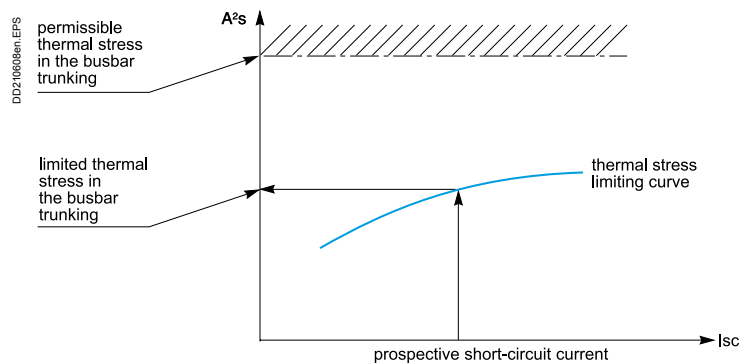

Checking the BTS withstand capacity in terms of thermal stress.


BTS protection by Compact NSX limiting circuit breakers

Limiting capacity

The circuit breakers in the Compact NSX range are limiting circuit breakers with a high current-limiting capacity.

A circuit breaker's limiting capacity is its ability to let only a limited current I_L , lower than the prospective asymmetrical peak short-circuit current I_{sc} through in the event of a short-circuit.


The consequence is a considerable reduction in electrodynamic and thermal stresses in the protected installation.

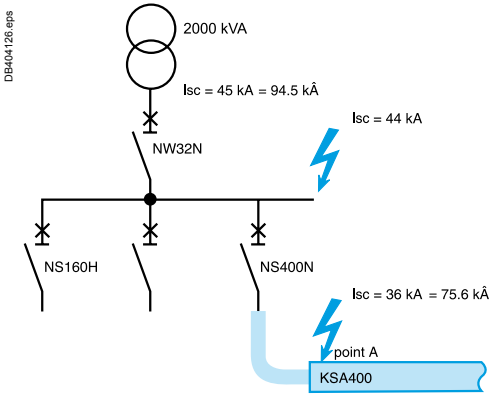


Example of a mid-sized installation (> 1000 kVA)

The diagram opposite shows the protection provided by an NSX400N limiting circuit breaker for KSA400 trunking.

- Without taking into account the circuit breaker's limiting capacity:
 - the prospective I_{sc} at point A would be 75.6 kA
 - KSA800 trunking would be required ($I_{peak} = 78.7 \text{ kA} > 75.6 \text{ kA}$ at point A).
- Taking into account the limiting capacity of the Compact NSX400N:
 - the value of I_{peak} limited by the circuit breaker is $30 \text{ kA} < 49.2 \text{ kA}$ of the KSA400 trunking
 - the value of the limited thermal stress is $1.6 \times 10^6 < 354 \times 10^6$ of the KSA400 trunking.

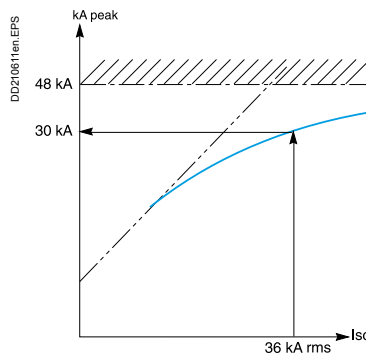

Current limiting

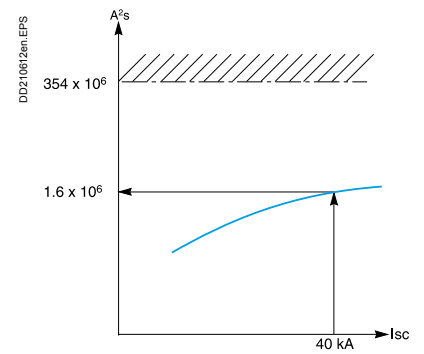

Energy limiting

Thanks to the high limiting capacity of Compact NSX400N circuit breakers, KSA400 busbar trunking can be used for prospective I_{sc} values up to 50 kA (105 kA) at point A.

The selection guides below can be used to determine the circuit breaker required to fully protect the trunking depending on the prospective short-circuit current of the installation.

Example: in an installation with a prospective *I*_{sc} of 15 kA, the circuit breaker required to protect 25 A KBB trunking is a iC60H (the rating depends on the rated current of the circuit).

In bold, the most appropriate device to the rating of the busbar trunking

Selection guide for 230 / 240 V

I_{sc} max (kA rms) KDP20	10 kA	15 kA	20 kA		
Circuit breaker	iC60N10/16/20 iC60N10/16/20 NG125N10/16/20	iC60H10/16/20 iC60H10/16/20	iC60L10/16/20 iC60L10/16/20		
I_{sc} max (kA rms) KBA25	10 kA	15 kA	20 kA	25 kA	
Circuit breaker	iC60N10/.../25 iC60N10/.../25 NG125N10/.../25	iC60H10/.../25 iC60H10/.../25	iC60L10/.../25 iC60L10/.../25	iC60L10/.../25 iC60L10/.../25	
I_{sc} max (kA rms) KBB25	10 kA	15 kA	20 kA	25 kA	
Circuit breaker	iC60N10/.../25 iC60N10/.../25 NG125N10/.../25	iC60H10/.../25 iC60H10/.../25	iC60L10/.../25 iC60L10/.../25	iC60L10/.../25 iC60L10/.../25	
I_{sc} max (kA rms) KBA40	10 kA	15 kA	20 kA	25 kA	50 kA
Circuit breaker	iC60N10/.../40 iC60N10/.../40	iC60H10/.../40 iC60H10/.../40	iC60L40 iC60L40 NG125N10/.../40	iC60L10/.../25 iC60L10/.../25	NG125L10/.../40
I_{sc} max (kA rms) KBB40	10 kA	15 kA	20 kA	25 kA	50 kA
Circuit breaker	iC60N10/.../40 iC60N10/.../40	iC60H10/.../40 iC60H10/.../40	iC60L40 iC60L40 NG125N10/.../40	iC60L10/.../25 iC60L10/.../25	NG125L10/.../40

Selection guide for 380 / 415 V

KDP / KBA / KBB trunking

I_{sc} max (kA rms) KDP20	10 kA	15 kA	20 kA			
Circuit breaker	iC60N10/16/20 iC60N10/16/20 NG125N10/16/20	iC60H10/16/20 iC60H10/16/20	iC60L10/16/20 iC60L10/16/20			
I_{sc} max (kA rms) KBA25	10 kA	15 kA	20 kA	25 kA		
Circuit breaker	iC60N10/.../25 iC60N10/.../25 NG125N10/.../25	iC60H10/.../25 iC60H10/.../25	iC60L10/.../25 iC60L10/.../25	iC60L10/.../25 iC60L10/.../25		
I_{sc} max (kA rms) KBB25	10 kA	15 kA	20 kA	25 kA		
Circuit breaker	iC60N10/.../25 iC60N10/.../25 NG125N10/.../25	iC60H10/.../25 iC60H10/.../25	iC60L10/.../25 iC60L10/.../25	iC60L10/.../25 iC60L10/.../25		
I_{sc} max (kA rms) KBA40	10 kA	15 kA	20 kA	25 kA	36 kA	50 kA
Circuit breaker	iC60N10/.../40 iC60N10/.../40	iC60H10/.../40 iC60H10/.../40	iC60L40 iC60L40 NG125N10/.../40	iC60L10/.../25 iC60L10/.../25	NG125H10/.../40	NG125L10/.../40
I_{sc} max (kA rms) KBB40	10 kA	15 kA	20 kA	25 kA	36 kA	50 kA
Circuit breaker	iC60N10/.../40 iC60N10/.../40	iC60H10/.../40 iC60H10/.../40	iC60L40 iC60L40 NG125N10/.../40	iC60L10/.../25 iC60L10/.../25	NG125H10/.../40	NG125L10/.../40

Selection guide for 380 / 415 V (cont.)

KNA trunking

Isc max (kA rms) KNA40	10 kA	15 kA	25 kA			
Circuit breaker	iC60N40	iC60H40	iC60L40			
	iC60N40	iC60H40	iC60L40			
	NG125N10/.../40		NSX100B/F/N/H/S/L 40			
Isc max (kA rms) KNA63	10 kA	15 kA	25 kA	36 kA	50 kA	
Circuit breaker	iC60N63	iC60H63	iC60H63			
	iC60N63	iC60H63	iC60H63			
	C120N	C120H				
			NG125N 63	NG125H 63	NG125L 63	
			NSX100B/F/N/H/S/L			
Isc max (kA rms) KNA100	10 kA	15 kA	20 kA	25 kA		
Circuit breaker	C120N	C120H				
			NG125N100			
			NSX100B/F/N/H/S/L NSX100B/F/N/H/S/L			
			NSX160B/F/N/H/S/L NSX160B/F/N/H/S/L			
Isc max (kA rms) KNA160	10 kA	15 kA	20 kA	25 kA	36 kA	50 kA
Circuit breaker	NG125N 125	NG125N 125	NG125N 125	NG125N 125		
				NSX100B/F/N/H/S/L	NSX100B/F/N/H/S/L	NSX100B/F/N/H/S/L
				NSX160B/F/N/H/S/L	NSX160B/F/N/H/S/L	NSX160B/F/N/H/S/L
				NSX250B/F/N/H/S/L	NSX250B/F/N/H/S/L	NSX250B/F/N/H/S/L

KSA trunking

Isc max (kA rms) KSA100	25 kA					
Circuit breaker	NG125N100					
	NSX100B/F/N/H/S/L					
Isc max (kA rms) KSA160	25 kA	36 kA	50 kA	70 kA	90 kA	
Circuit breaker	NSX100B/F/N/H/S/L	NSX100F/N/H/S/L	NSX100N/H/S/L	NSX100H/S/L	NSX100S/L	
	NSX160B/F/N/H/S/L	NSX160F/N/H/S/L	NSX160N/H/S/L	NSX160H/S/L		
	NSX250B/F/N/H/S/L	NSX250F/N/H/S/L	NSX250N/H/S/L			
Isc max (kA rms) KSA250	25 kA	36 kA	50 kA	70 kA	100 kA	150 kA
Circuit breaker	NSX160B/F/N/H/S/L	NSX160F/N/H/S/L	NSX160N/H/S/L	NSX160H/S/L	NSX160S/L	NSX160L
	NSX250B/F/N/H/S/L	NSX250F/N/H/S/L	NSX250N/H/S/L	NSX250H/S/L	NSX250S/L	NSX250L
	NSX400F/N/H/S/L	NSX400F/N/H/S/L	NSX400N/H/S/L			
Isc max (kA rms) KSA400	25 kA	36 kA	50 kA	70 kA	100 kA	150 kA
Circuit breaker	NSX250B/F/N/H/S/L	NSX250F/N/H/S/L	NSX250N/H/S/L	NSX250H/S/L	NSX250S/L	NSX250L
	NSX400F/N/H/S/L	NSX400F/N/H/S/L	NSX400N/H/S/L	NSX400H/S/L	NSX400S/L	NSX400L
	NSX630F/N/H/S/L	NSX630F/N/H/S/L	NSX630N/H/S/L	NSX630H/S/L	NSX630S/L	NSX630L
	NS630b N/H/L/LB	NS630b L/LB	NS630b L/LB	NS630b LB		
Isc max (kA rms) KSA500	25 kA	36 kA	50 kA	70 kA	100 kA	150 kA
Circuit breaker	NSX400F	NSX400F	NSX400N	NSX400H	NSX400S	NSX400L
	NSX630F	NSX630F	NSX630N	NSX630H	NSX630S	NSX630L
	NS630b N	NS630b N	NS630b L/LB	NS630b LB	NS630b LB	
Isc max (kA rms) KSA630	32 kA	36 kA	50 kA	70 kA	100 kA	150 kA
Circuit breaker	NSX400F	NSX400F	NSX400N	NSX400H	NSX400S	NSX400L
	NSX630F	NSX630F	NSX630N	NSX630H	NSX630S	NSX630L
	NS630b N	NS630b L	NS630b L	NS630b L	NS630b L	NS630b LB
	NS800 N	NS800 L	NS800 L	NS800 L	NS800 L	NS800 LB
	NT06H1	NT06L1	NT06L1	NT06L1	NT06L1	
	NT08H1	NT08L1	NT08L1	NT08L1	NT08L1	
Isc max (kA rms) KSA800	36 kA	50 kA	70 kA	100 kA	150 kA	
Circuit breaker	NSX630F	NSX630N	NSX630H	NSX630S	NSX630L	
	NS630b N	NS630b L	NS630b L	NS630b L	NS630b L	
	NS800 N	NS800 L	NS800 L	NS800 L	NS800 L	
	NS1000 N	NS1000 L	NS1000 L	NS1000 L	NS1000 L	
	NT06H1	NT06L1	NT06L1	NT06L1	NT06L1	
	NT08H1	NT08L1	NT08L1	NT08L1	NT08L1	
	NT10H1	NT10L1	NT10L1	NT10L1	NT10L1	
Isc max (kA rms) KSA1000	36 kA	50 kA	70 kA	100 kA	150 kA	
Circuit breaker	NS800 N	NS800 L	NS800 L	NS800 L	NS800 L	
	NS1000 N	NS1000 L	NS1000 L	NS1000 L	NS1000 L	
	NS1250 N					
	NT08H1	NT08L1	NT08L1	NT08L1	NT08L1	
	NT10H1	NT10L1	NT10L1	NT10L1	NT10L1	
	NT12H1					

Selection guide for 660 / 690 V

KSA trunking

Isc max (kA rms) KSA100	10 kA	15 kA	20 kA	75 kA		
Circuit breaker	NSX100N/H/S/L NSX160N/H/S/L NSX250N/H/S/L	NSX100S/L NSX160S/L NSX250S/L	NSX100L	NS100L		
Isc max (kA rms) KSA160	10 kA	15 kA	20 kA	75 kA		
Circuit breaker	NSX100N/H/S/L NSX160N/H/S/L NSX250N/H/S/L	NSX100S/L NSX160S/L NSX250S/L	NSX100L NSX160L NSX250L	NS100L		
Isc max (kA rms) KSA250	10 kA	15 kA	20 kA	35 kA	75 kA	
Circuit breaker	NSX160N/H/S/L NSX250N/H/S/L NSX400F/N/H/S/L	NSX160S/L NSX250S/L NSX400H/S/L	NSX160L NSX250L NSX400S/L	NSX400L	NS400L	
Isc max (kA rms) KSA400	10 kA	15 kA	20 kA	35 kA	75 kA	
Circuit breaker	NSX250N/H/S/L NSX400F/N/H/S/L NSX630F/N/H/S/L	NSX250S/L	NSX250L NSX400H/S/L NSX630H/S/L	NSX400L NSX630L	NS400L NS630b LB	
Isc max (kA rms) KSA500	10 kA	20 kA	25 kA	35 kA	75 kA	
Circuit breaker	NSX400F/N/H/S/L NSX630F/N/H/S/L	NSX400H/S/L NSX630H/S/L		NSX400L NSX630L	NS400 L NS630b LB NS800 LB	
Isc max (kA rms) KSA630	10 kA	15 kA	20 kA	30 kA	35 kA	75 kA
Circuit breaker	NSX400F/N/H/S/L NSX630F/N/H/S/L	NSX400H/S/L NSX630H/S/L	NSX400S/L NSX630S/L		NSX400L NSX630L	NS400 L NS630b LB NS800 LB
Isc max (kA rms) KSA800	10 kA	15 kA	20 kA	30 kA	35 kA	75 kA
Circuit breaker	NSX630F/N/H/S/L	NSX630H/S/L	NSX630S/L		NS630b N NS800 N NS1000 N	NS630b H NS800 H NS1000 H
Isc max (kA rms) KSA1000	30 kA	35 kA	75 kA			
Circuit breaker	NS800 N NS1000 N NS1250 N	NS800 H NS1000 H NS1250 H	NS800 LB			
		NT08H1/H2 NT10H1/H2 NT12H1/H2				
		NW08N1 NW10N1 NW12N1				


Lighting control with Canalis KNT

With Canalis KNT, lighting control systems can provide a high degree of flexibility in the creation and modification of lighting zones and levels:

- use of KNT trunking equipped with 4 conductors for power circuits and 3 conductors for remote control.


1st application: 3-zone lighting.

Each KNT tap-off unit is equipped with a remote-controlled modular contactor.

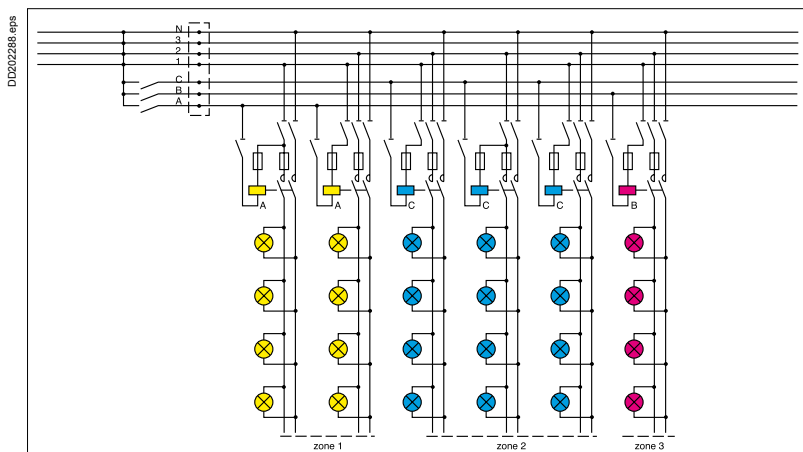


2nd application: gradual lighting with 3 illuminance levels.

Each KNT tap-off unit is equipped with 3 remote-controlled modular contactors.

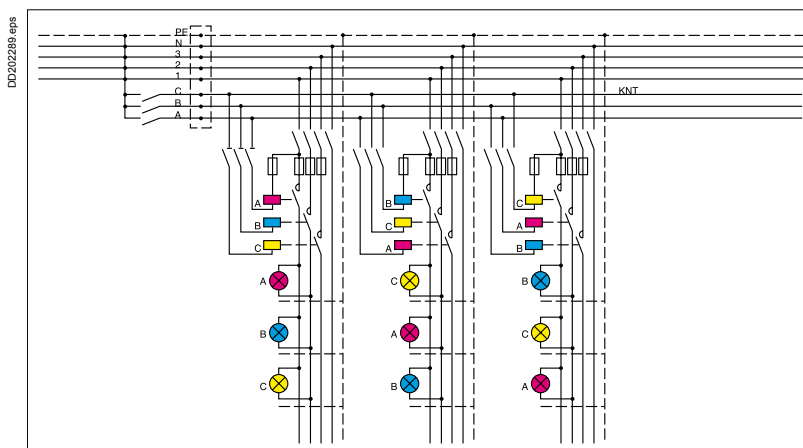

Emergency lighting and lighting in a workshop or warehouse

Use of KBA trunking

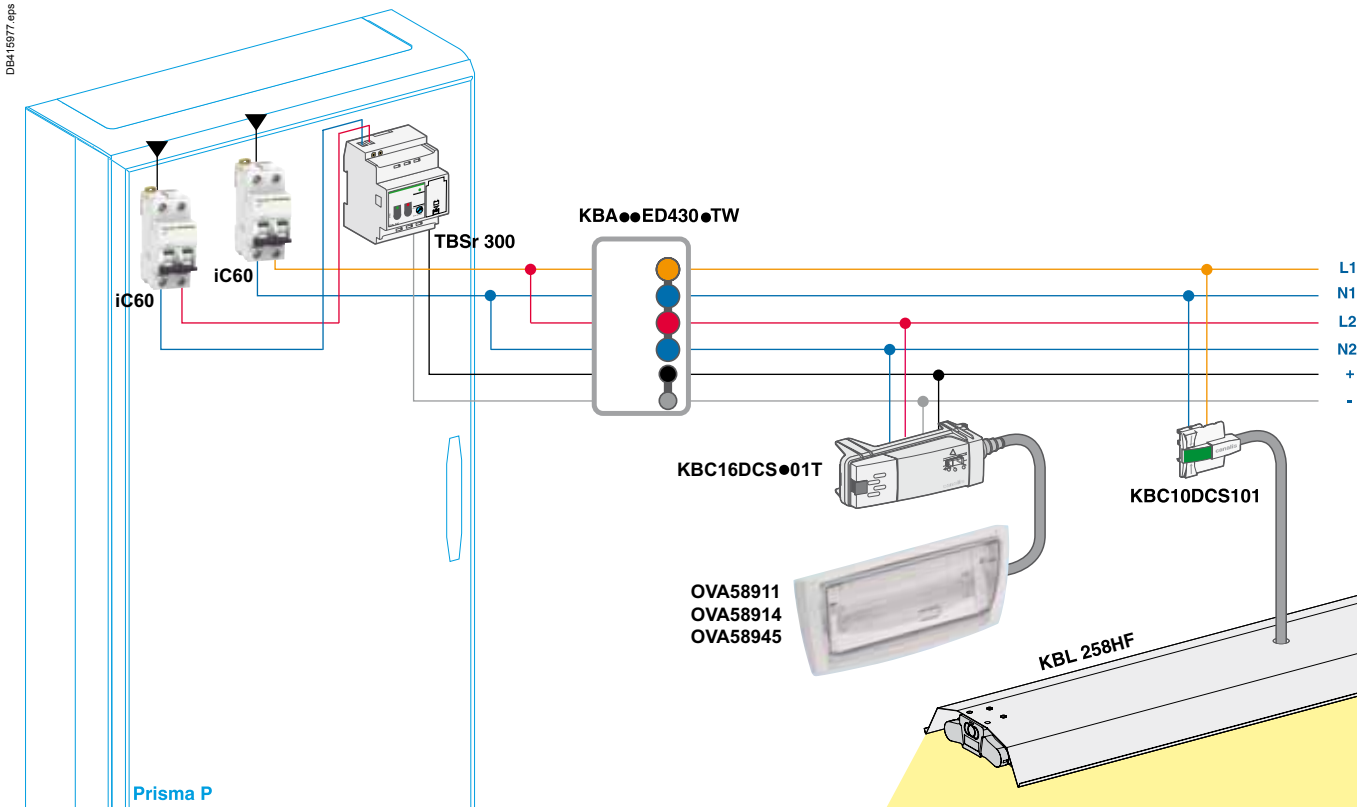


Canalis KBA, equipped with option T (1 twisted pair), provides 6 conductors + the PE via the sheetmetal.

This makes it possible to implement single-phase lighting circuits for the supply and control of self-contained emergency lighting units in the same trunking.

Emergency lighting and lighting in an underground carpark

Use of KBB trunking


DB-115979.eps

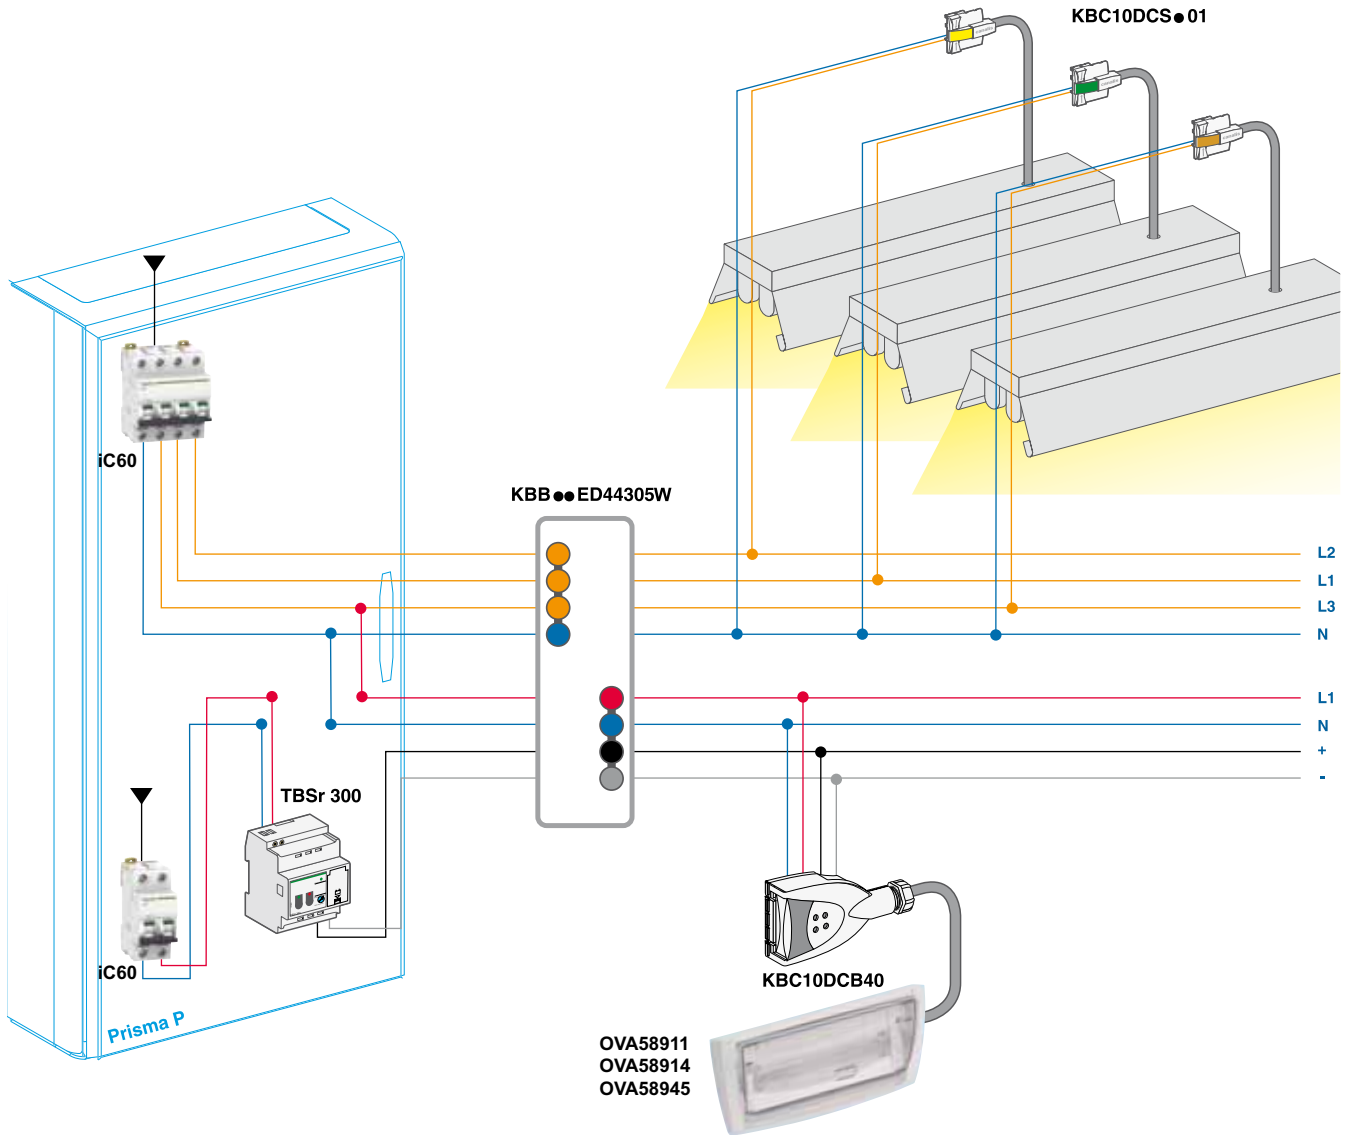

Canalis KBB has 2 separate circuits made up of 2 or 4 live conductors. This makes it possible to easily implement classical three-phase lighting via one circuit and supply and control self-contained emergency lighting units via the other circuit.

Lighting with DALI control and emergency lighting in a laboratory

Use of KBA trunking

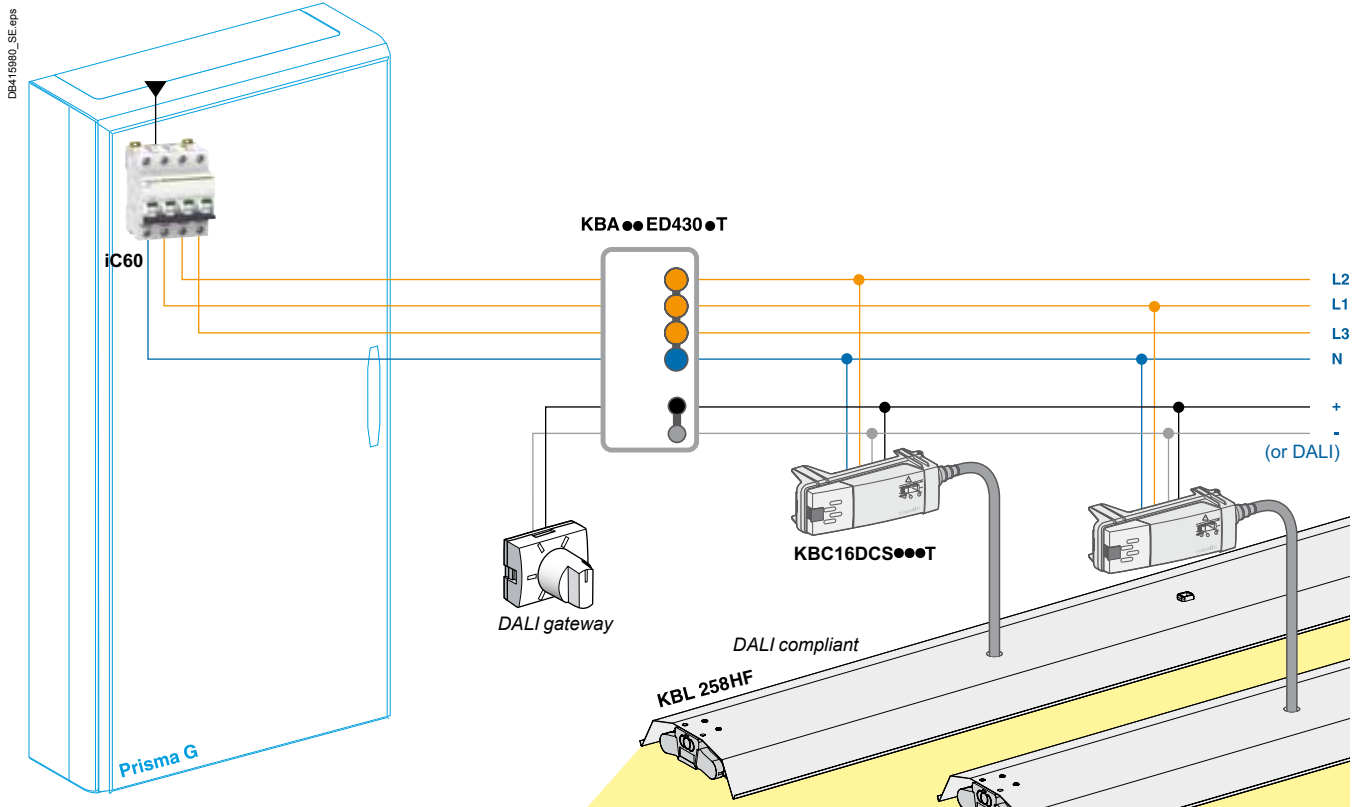


The additional twisted pair provided by Canalis KBA option T carries the signal 0 – 10 V or DALI (D+/D-). Light fixtures equipped with electronic ballasts are supplied by connectors KBC16DCS...T.

Lighting with DALI control and emergency lighting in a large store or warehouse

Use of KBB trunking

DB415981-SE-eps

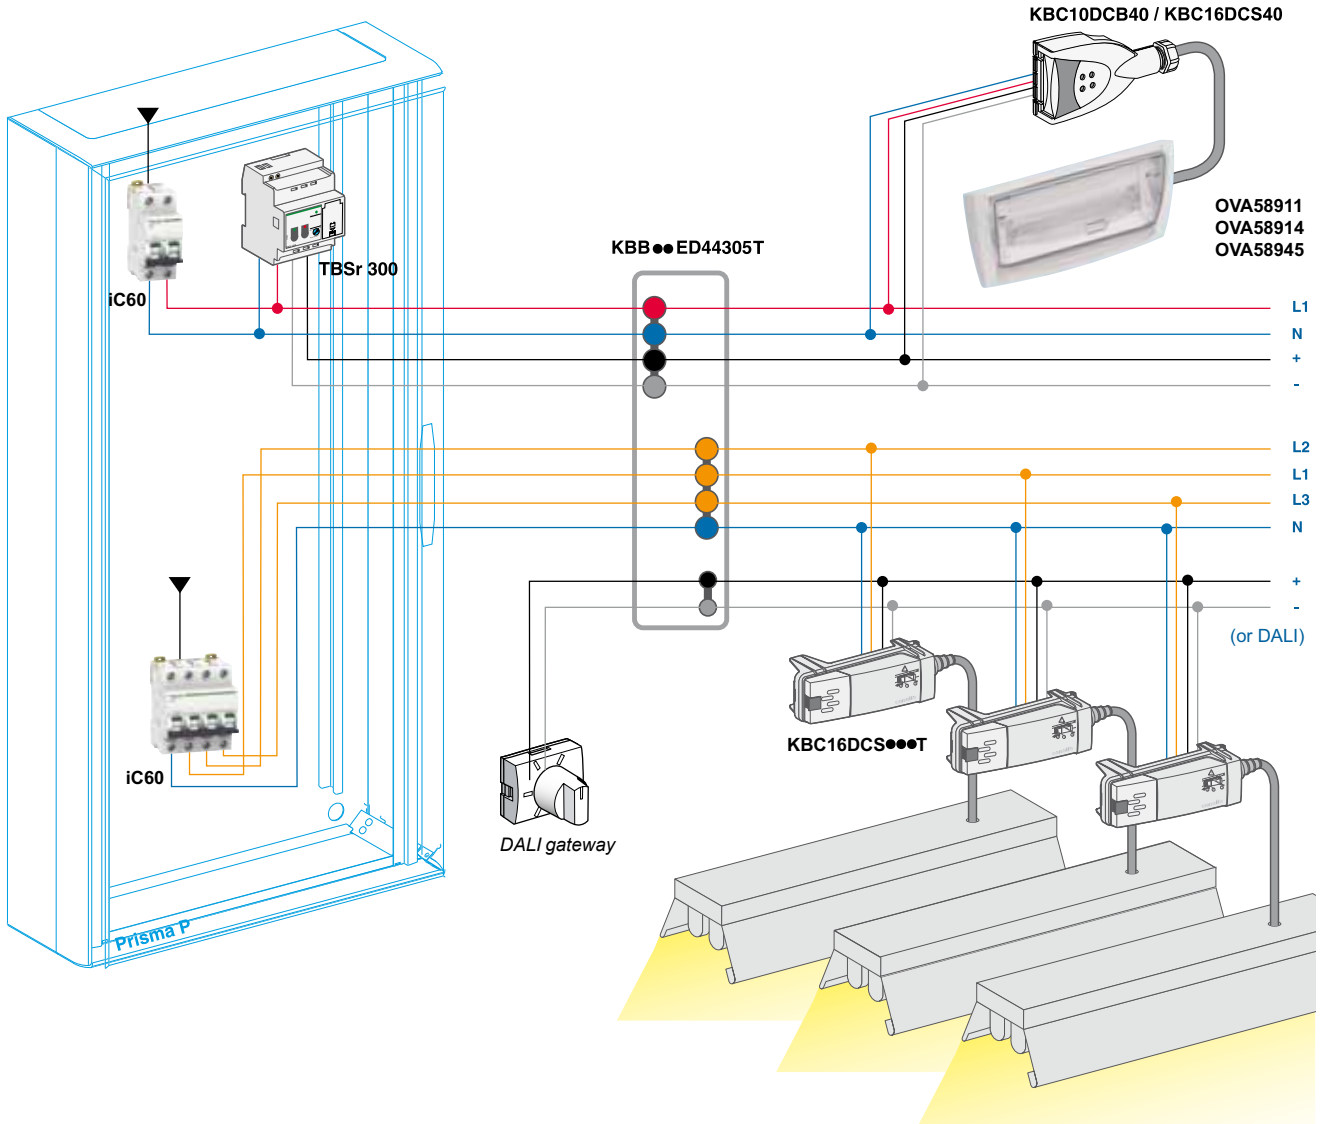


Canalis KBB is equipped with 2 circuits of 4 conductors + T option.
 One circuit is used for light fixture monitored by DALI ballast.
 The second circuit is used for emergency lighting.

Lighting controlled by proximity sensors and emergency lighting in a logistics centre or warehouse

Use of KBB trunking


DB-rl15963.eps

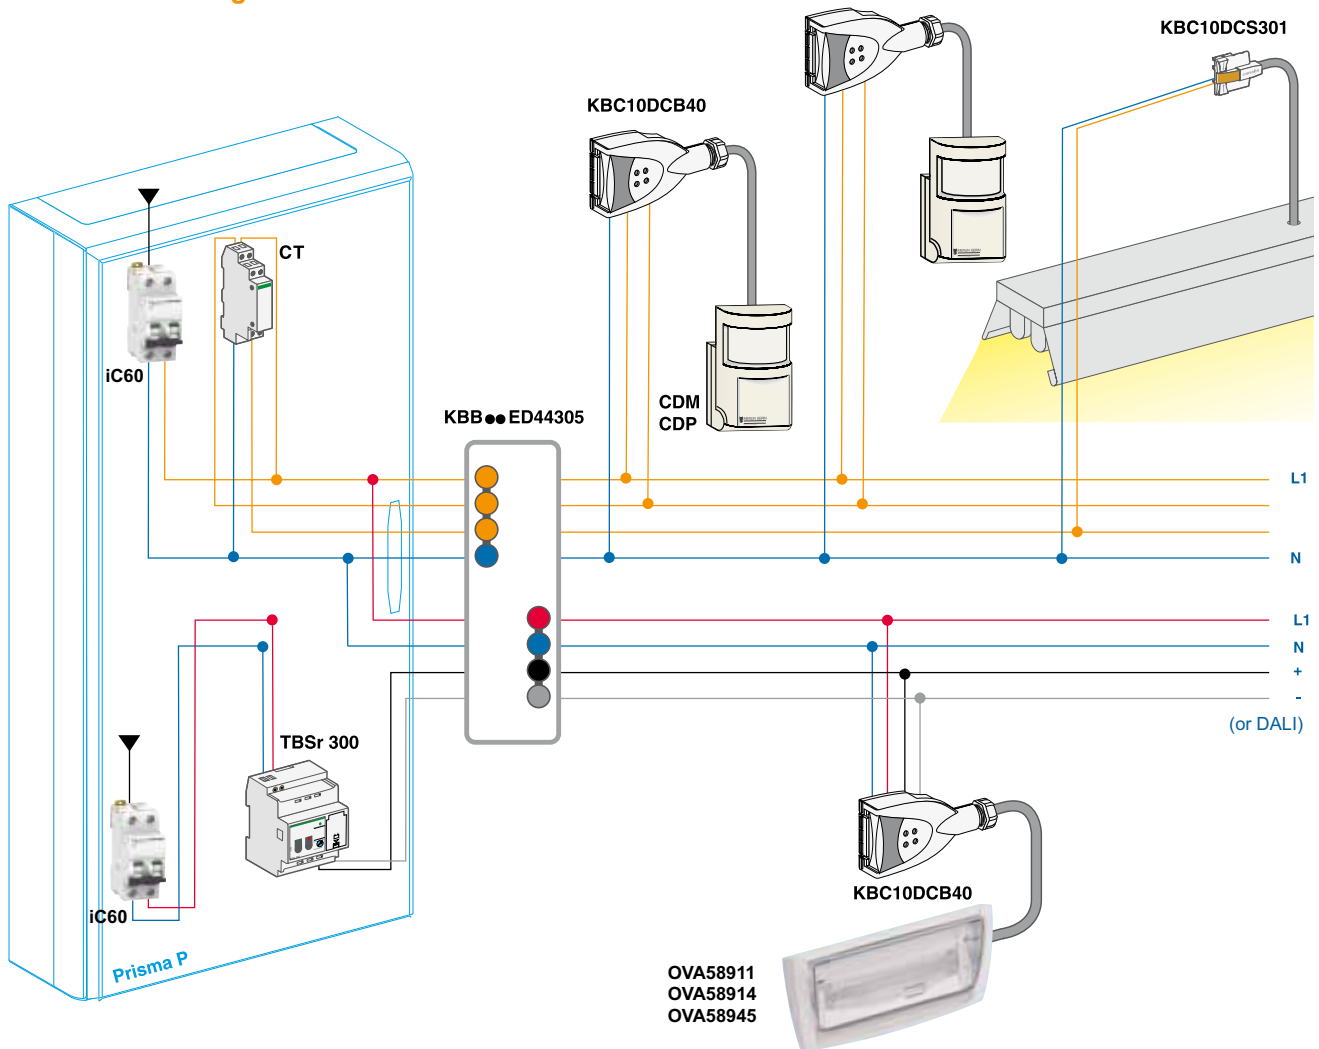

Canalis KBB makes it possible to control a single-phase lighting circuit by a proximity sensor. The associated relays are located in the floor switchboard.
Canalis KBB trunking with 2 circuits can be used for combined installations with self-contained emergency lighting units.

Lighting management solution incorporating the main functions

Standard mode

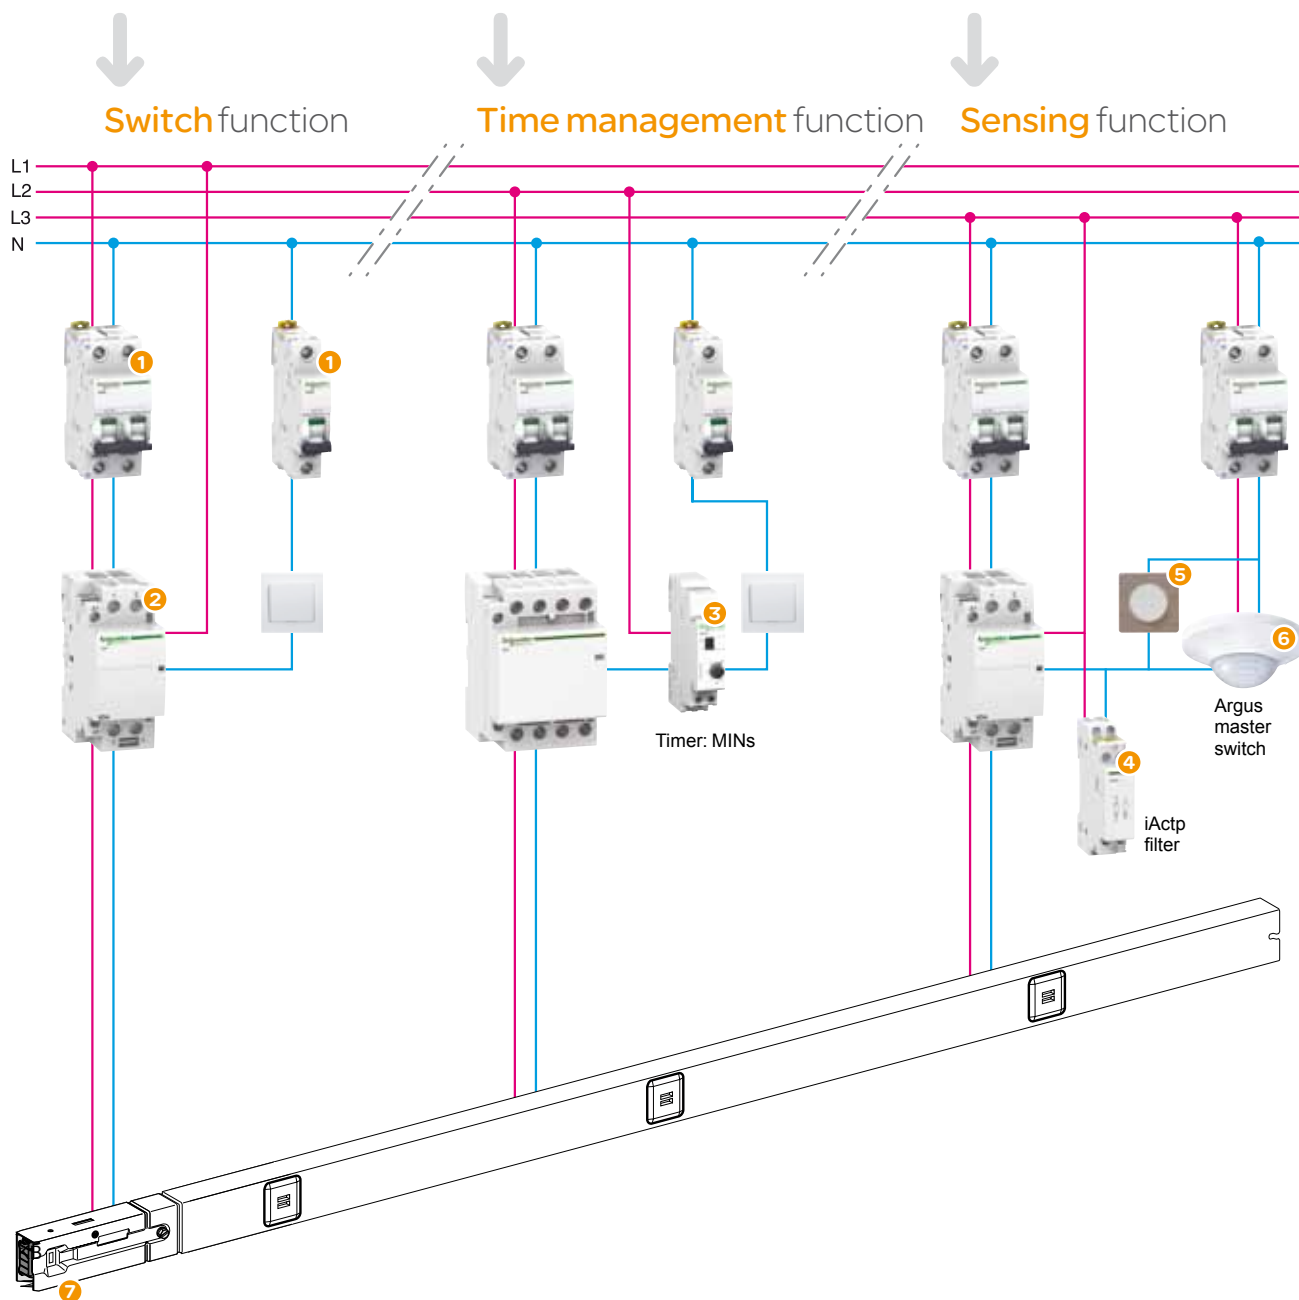

- ① **Protection:** 2P iC60N and 1P iC60N circuit-breakers
- ② **Contactors:** 1-ph iCT
- ③ **Timer:** MINs
- ④ **Auxiliary:** iACTp interference filter
- ⑤ **Pushbutton:** Odace type
- ⑥ **Movement sensor:** Argus
- ⑦ **Canalis:** KBB type

The first level of the iBusway for lighting management solution incorporates the main lighting management functions. A distinction is made between lighting management functions linked to Canalis and those in an enclosure. Canalis offers a wide choice of connectors dedicated to switching on and off: two-way switches, 1-pole and 2-pole one-way switches and timers. Combined with a simpler terminal power supply connector, these functions are remotely located in the electrical switchboard. *NB: The main control switch controls all the distribution circuits simultaneously. This configuration applies to the switch, time management/timer and sensing functions. These functions can be combined according to the application.*




Learn more about Canalis lighting management solution online

Loads monitored by a power meter in tap-off units

DB405620.eps



Line capacity is managed in real time.
Information is available on the monitoring system.

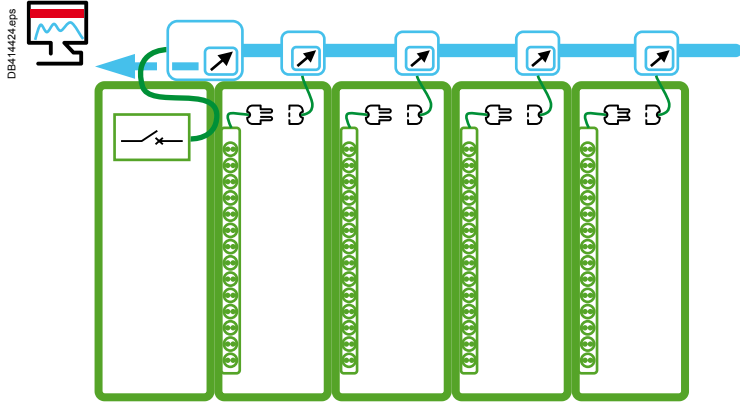

DB405625.eps



Functions available:


- Protection of Canalis lines by Compact NSX circuit-breakers (100 A, 160 A, 250 A or 400 A rating).
- Protection of loads by circuit-breakers from the Acti 9 range (single-phase or 3-phase 16 A, 32 A or 63 A) with or without differential protection (30 mA).
- Feed units are equipped with front panel-mounted sockets or wander sockets (IEC 309).
- For loads, measures power rate, phase balancing, THD, power factor, voltage, current, active and reactive power and consumption.

DB405643.eps



Compact NSX circuit-breakers can be fitted with Micrologic power meter.

Architecture diagram:

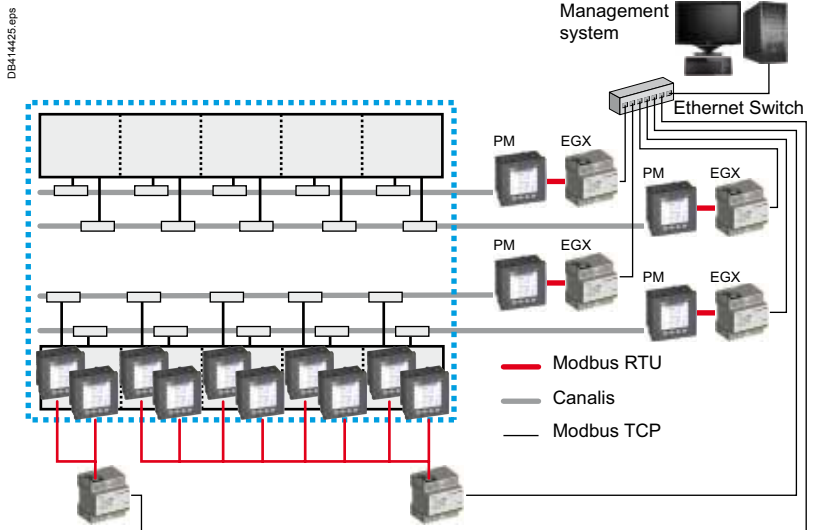

<i>Index</i>	3
<i>Introduction</i>	9
<i>Design guides and characteristics</i>	29
<i>Canalis KDP</i>	57
<i>Canalis KBA</i>	79
<i>Canalis KBB</i>	99
<i>Canalis KN</i>	121
<i>Canalis KS</i>	153
<i>Canalis KS riser</i>	205
<i>Canalis KT</i>	225
<i>Technical specifications</i>	231
<i>Maintenance</i>	239
<i>Recommendations for special applications</i>	243

Catalogue numbers

Replacement table former/new catalogue numbers	274
---	------------

<i>Canalis worldwide</i>	279
--------------------------	-----

Replacement table

former/new catalogue numbers

Former cat. numbers	New cat. numbers	Former cat. numbers	New cat. numbers
KBA		KBA40EL402W	KBA40ED4203W
KBA25AA4	KBA25ABG4	KBA40EL403	KBA40ED4305
KBA25EA203	KBA25ED2303	KBA40EL403T	KBA40ED4305T
KBA25EA203T	KBA25ED2303T	KBA40EV002	KBA40EDA20
KBA25EA203TW	KBA25ED2303TW	KBA40EV002W	KBA40EDA20W
KBA25EA203W	KBA25ED2303W	KBA40FA2	KBA40AF
KBA25EA402	KBA25ED4202	KBA40SL4	KBA40ABD4
KBA25EA403	KBA25ED4303	KBA40SL4T	KBA40ABD4T
KBA25EA403T	KBA25ED4303T	KBA40SL4TW	KBA40ABD4TW
KBA25EA403TW	KBA25ED4303TW	KBA40SL4W	KBA40ABD4W
KBA25EA403W	KBA25ED4303W	KBA40ZA1	Cancelled
KBA25EB203	KBA25ED2302	KBA40ZA2	Cancelled
KBA25EB403	KBA25ED4302	KBA40ZA3	Cancelled
KBA25EL203	KBA25ED2305	KBA40ZFPU	KBA40ZFPU
KBA25EL203T	KBA25ED2305T	KBA40ZG1	Cancelled
KBA25EL403	KBA25ED4305	KBA40ZSU	KBA40ZFSU
KBA25EL403T	KBA25ED4305T	KBA40ZU	KBA40ZFU
KBA25ES203	KBA25ED2300	KBA40ZU2	KBA40ZFU2
KBA25ES403	KBA25ED4300	KBA40ZU2W	KBA40ZFU2W
KBA40AA4	KBA40ABG4	KBA40ZUW	KBA40ZFUW
KBA40AA4S1	Cancelled	KBB	
KBA40AA4T	KBA40ABG4T	KBB25EA203	KBB25ED2303
KBA40AA4TW	KBA40ABG4TW	KBB25EA203T	KBB25ED2303T
KBA40AA4W	KBA40ABG4W	KBB25EA203TW	KBB25ED2303TW
KBA40BT4	KBA40ABT4	KBB25EA203W	KBB25ED2303W
KBA40BT4W	KBA40ABT4W	KBB25EA223	KBB25ED22305
KBA40EA203	KBA40ED2303	KBB25EA223T	KBB25ED22305T
KBA40EA203T	KBA40ED2303T	KBB25EA223TW	KBB25ED22305TW
KBA40EA203TW	KBA40ED2303TW	KBB25EA223W	KBB25ED22305W
KBA40EA203W	KBA40ED2303W	KBB25EA403	KBB25ED4303
KBA40EA403	KBA40ED4303	KBB25EA403T	KBB25ED4303T
KBA40EA403T	KBA40ED4303T	KBB25EA403TW	KBB25ED4303TW
KBA40EA403TW	KBA40ED4303TW	KBB25EA403W	KBB25ED4303W
KBA40EA403W	KBA40ED4303W	KBB25EA423	KBB25ED42305
KBA40EF400	KBA40DF405	KBB25EA423W	KBB25ED42305W
KBA40EF400T	KBA40DF405T	KBB25EA443T	KBB25ED44305T
KBA40EF400TW	KBA40DF405TW	KBB25EA443TW	KBB25ED44305TW
KBA40EF400W	KBA40DF405W	KBB25EA443W	KBB25ED44305W
KBA40EF402	KBA40DF420	KBB40AA4	KBB40ABG4
KBA40EF402T	KBA40DF420T	KBB40AA44	KBB40ABG44
KBA40EF402TW	KBA40DF420TW	KBB40AA44T	KBB40ABG44T
KBA40EF402W	KBA40DF420W	KBB40AA44TW	KBB40ABG44TW
KBA40EL202	KBA40ED2203	KBB40AA44W	KBB40ABG44W
KBA40EL202T	KBA40ED2203T	KBB40AA4T	KBB40ABG4T
KBA40EL203	KBA40ED2305	KBB40AA4TW	KBB40ABG4TW
KBA40EL203T	KBA40ED2305T	KBB40AA4W	KBB40ABG4W
KBA40EL402	KBA40ED4203	KBB40BT44W	KBB40ABT44W
KBA40EL402T	KBA40ED4203T	KBB40BT4W	KBB40ABT4W
KBA40EL402TW	KBA40ED4203TW	KBB40EA202	KBB40ED2202

Replacement table former/new catalogue numbers (cont.)

Former cat. numbers	New cat. numbers	Former cat. numbers	New cat. numbers
KBB (cont.)		KBB40EF442TW	KBB40DF4420TW
KBB40EA202T	KBB40ED2202T	KBB40EF442W	KBB40DF4420W
KBB40EA202TW	KBB40ED2202TW	KBB40EV002W	KBB40EDA20W
KBB40EA202W	KBB40ED2202W	KBB40SL4	KBB40ABD4
KBB40EA203	KBB40ED2303	KBB40SL44E	KBB40ABD44E
KBB40EA203T	KBB40ED2303T	KBB40SL44T	KBB40ABD44T
KBB40EA203TW	KBB40ED2303TW	KBB40SL44TW	KBB40ABD44TW
KBB40EA203W	KBB40ED2303W	KBB40SL4E	KBB40ABD4E
KBB40EA222	KBB40ED22203	KBB40SL4T	KBB40ABD4T
KBB40EA222T	KBB40ED22203T	KBB40SL4TW	KBB40ABD4TW
KBB40EA222TW	KBB40ED22203TW	KBB40SL4W	KBB40ABD4W
KBB40EA222W	KBB40ED22203W	KBB40YA4	KBB40ZJ4
KBB40EA223	KBB40ED22305	KBB40YA44	KBB40ZJ44
KBB40EA223T	KBB40ED22305T	KBB40YA44T	KBB40ZJ44T
KBB40EA223TW	KBB40ED22305TW	KBB40YA44TW	KBB40ZJ44TW
KBB40EA223W	KBB40ED22305W	KBB40YA44W	KBB40ZJ44W
KBB40EA402	KBB40ED4202	KBB40ZC	KBB40ZFC
KBB40EA402T	KBB40ED4202T	KBB40ZC5	KBB40ZFC5
KBB40EA402TW	KBB40ED4202TW	KBB40ZC6	KBB40ZFC6
KBB40EA402W	KBB40ED4202W	KBB40ZFG1	KBB40ZFG1
KBB40EA403	KBB40ED4303	KBB40ZFPU	KBB40ZFPU
KBB40EA403T	KBB40ED4303T	KBB40ZGU	KBB40ZFGU
KBB40EA403TW	KBB40ED4303TW	KBB40ZMP	KBB40ZFMP
KBB40EA403W	KBB40ED4303W	KBB40ZS	KBB40ZFS
KBB40EA422W	KBB40ED42203W	KBB40ZS23	KBB40ZFS23
KBB40EA423	KBB40ED42305	KBB40ZSU	KBB40ZFSU
KBB40EA423W	KBB40ED42305W	KBB40ZU	KBB40ZFU
KBB40EA442	KBB40ED44203	KBB40ZU2W	KBB40ZFU2W
KBB40EA442T	KBB40ED44203T	KBB40ZUW	KBB40ZFUW
KBB40EA442TW	KBB40ED44203TW	KBC	
KBB40EA442W	KBB40ED44203W	KBC10CB20	KBC10DCB20
KBB40EA443	KBB40ED44305	KBC10CB40	KBC10DCB40
KBB40EA443T	KBB40ED44305T	KBC10CC211	KBC10DCC211
KBB40EA443TW	KBB40ED44305TW	KBC10CC21Z	KBC10DCC21Z
KBB40EA443W	KBB40ED44305W	KBC10CS101	KBC10DCS101
KBB40EF400	KBB40DF405	KBC10CS201	KBC10DCS201
KBB40EF400T	KBB40DF405T	KBC10CS301	KBC10DCS301
KBB40EF400TW	KBB40DF405TW	KBC10DA20	KBC10DDA20
KBB40EF400W	KBB40DF405W	KBC10DA21Z	KBC10DDA21Z
KBB40EF402	KBB40DF420	KBC10MT20	KBC10DMT20
KBB40EF402T	KBB40DF420T	KBC10SA21Z	KBC10DSA21Z
KBB40EF402TW	KBB40DF420TW	KBC10VV20	KBC10DVV20
KBB40EF402W	KBB40DF420W	KBC10VV21Z	KBC10DVV21Z
KBB40EF440	KBB40DF4405	KBC16AZ01	KBC16ZT1
KBB40EF440T	KBB40DF4405T	KBC16AZ1	KBC16ZL10
KBB40EF440TW	KBB40DF4405TW	KBC16AZ2	KBC16ZL20
KBB40EF440W	KBB40DF4405W	KBC16CB21	KBC16DCB21
KBB40EF442	KBB40DF4420	KBC16CB216	KBC16DCB216
KBB40EF442T	KBB40DF4420T	KBC16CB22	KBC16DCB22

Replacement table

former/new catalogue numbers

(cont.)

Former cat. numbers	New cat. numbers	Former cat. numbers	New cat. numbers
KBC (cont.)		KFB	
KBC16CB226	KBC16DCB226	KFBEI600	KFBEVDI
KBC16CB40	KBC16DCB40	KFBSB600	KFBSVDI
KBC		KNA	
KBC16CF21	KBC16DCF21	KNA01CD2	KNB16CM2
KBC16CF216	KBC16DCF216	KNA01CD2H	KNB16CM2H
KBC16CF22	KBC16DCF22	KNA01CD5	KNB16CN5
KBC16CF226	KBC16DCF226	KNA01CF2	KNB16CF2
KBC16CF40	KBC16DCF40	KNA01CG2	KNB16CG2
KBC16CP1	KBC16DCP1	KNA01CP11	KNB32CP11F
KBC16CP2	KBC16DCP2	KNA01CP12D	KNB32CP11D
KBC16ZB	KBC16ZB1	KNA01CP16	KNB32CP
KBC16ZC	KBC16ZC1	KNA01CP21	KNB32CP11F
KBZ		KNA02CG5	KNB20CG5
KBZ30VP01	KBZ30ZVP01	KNA02CM54	KNB32CM55
KBZ31FC010	KBZ31EFC010	KNA02CX54	KNB32CM55
KBZ31FC030	KBZ31EFC030	KNA02SD4	KNB25SD4
KBZ31FC050	KBZ31EFC050	KNA03AZ10	KNB160ZL10
KBZ31FM020	KBZ31EFM020	KNA03AZ20	KNB160ZL20
KBZ31FM030	KBZ31EFM030	KNA03AZ30	KNB160ZL30
KBZ31FM040	KBZ31EFM040	KNA03AZ40	KNB160ZL40
KBZ31FM050	KBZ31EFM050	KNA03SF4	KNB50SF4
KBZ31FM070	KBZ31EFM070	KNA03SG4	KNB32SG4
KBZ31FM090	KBZ31EFM090	KNA03SJ4	KNB50SN4
KBZ31MC010	KBZ31EMC010	KNA03SM416	KNB63SM412
KBZ32BA12	KBZ32DBA12	KNA03SM42X7	KNB63SM412
KBZ32BA15	KBZ32DBA15	KNA03SM47	KNB63SM48
KBZ32PFR2	KBZ32APFR2	KNA03SX416	KNB63SM412
KBZ32PMR2	KBZ32APMR2	KNA03SX47	KNB63SM48
KDP		KNA04EA430	KNA40ED4303
KDP20AA4	KDP20ABG4	KNA04ED430	KNA40ED4306
KDP20EB2024	KDP20ED224150	KNA06AB4	KNA63AB4
KDP20EB2024X	KDP20ED224150	KNA06BT4	KNA63ABT4
KDP20EB2192	KDP20ED2192150	KNA06EA430	KNA63ED4303
KDP20EB2192X	KDP20ED2192150	KNA06ED420	KNA63ED4204
KDP20EB4024	KDP20ED424150	KNA06EF4	KNA63DF410
KDP20EB4024X	KDP20ED424150	KNA06LF4	KNA63DL4
KDP20EB4192	KDP20ED4192150	KNA06YA4	KNA63ZJ4
KDP20EE2024	KDP20ED224300	KNA10AB4	KNA100AB4
KDP20EE4024	KDP20ED424300	KNA10EA430	KNA100ED4303
KDP20EE4192	KDP20ED4192300	KNA10ED420	KNA100ED4204
KDPZ10	KDPZF10	KNA10ED430	KNA100ED4306
KDPZ11	KDPZF11	KNA10EF4	KNA100DF410
KDPZ12	KDPZF12	KNA10LF4	KNA100DL4
KDPZ13	KDPZF13	KNA10YA4	KNA100ZJ4
KDPZ14	KDPZF14	KNA10ZA1	KNB160ZF1
KDPZ20	KDPZF20	KNA10ZA2	KNB160ZF2
KDPZ21	KDPZF21	KNA10ZG20	KNB160ZFG100
KDPZ30	KDPZF30	KNA100DF430	KNA100EDF430
KDPZ31	KDPZF31		

Replacement table

former/new catalogue numbers

(cont.)

Former cat. numbers	New cat. numbers	Former cat. numbers	New cat. numbers
KNE		KSA10DB40030	KSB100SM412
KNE01YC10	KNE01YC10	KSA10DB50030	KSB100SM512
KNE01YC11	KNE01YC11	KSA10EA430	KSA100ED4306
KNE02CF5	KNB25CF5	KSA10EA450	KSA100ED45010
KNE02YC12	KNE02YC12	KSA10SF41	KSB100SF4
KNE02YC13	KNE02YC13	KSA10SF5	KSB100SF5
KNE03YC14	KNE03YC14	KSA12AZ1	Cancelled
KNE03YC15	KNE03YC15	KSA12AZ2	Cancelled
KNE03YC16	KNE03YC17	KSA12AZ40	KSA12AZ40
KNE03YC2X7	KNE03YC2X8	KSA12HD502	KSB125HD5
KNE06EF4	KNA63DF410	KSA12SF41	KSB100SF4
KNE06LF4	KNA63DL4		KSB160SF4
KNE06YB1	KNE06YB2	KSA12SF5	KSB100SF5
KNE10EF4	KNA100DF410		KSB160SF5
KNE10LF4	KNA100DL4	KSA12SV4	KSB100SV4
KNE10YA1	KNE10YA1		KSB160SV4
KNE10YA2	KNE10YA2	KSA12SV5	KSB100SV5
KNE10YB1	KNE10YB1		KSB160SV5
KNT		KSA16AZ1	Cancelled
KNT02CM54	KNB32CM55	KSA16AZ40	KSB160ZC1
KNT02CX54	KNB32CM55	KSA16DB411	KSB160DC4
KNT03AZ01	KNT63ZT1	KSA16DB412	KSB160DB412
KNT04EA430	KNT40ED4303	KSA16DB511	KSB160DC5
KNT04ED430	KNT40ED4306	KSA16DB512	KSB160DB512
KNT06AB4	KNT63AB4	KSA16EA430	KSA160ED4306
KNT06BT4	KNT63ABT4	KSA16EA450	KSA160ED45010
KNT06EA430	KNT63ED4303	KSA16SF3	KSB160SF4
KNT06ED420	KNT63ED4204	KSA16SF41	KSB160SF4
KNT06ED430	KNT63ED4306	KSA16SF5	KSB160SF5
KNT06EF4	KNT63DF410	KSA25AB42	KSA250AB4
KNT06LF4	KNT63DL4	KSA25BT42	KSA250ABT4
KNT06YA4	KNT63ZJ4	KSA25DB411	KSB250DC4
KNT10AB4	KNT100AB4	KSA25DB412	KSB400DB412
KNT10BT4	KNT100ABT4	KSA25DB511	KSB250DC5
KNT10EA430	KNT100ED4303	KSA25DB512	KSB400DB512
KNT10ED420	KNT100ED4204	KSA25EB430	KSA250ED4306
KNT10ED430	KNT100ED4306	KSA25EB450	KSA250ED45010
KNT10EF4	KNT100DF410	KSA25ED415	KSA250ED4156
KNT10LF4	KNT100DL4	KSA25ED420	KSA250ED4208
KNT10YA4	KNT100ZJ4	KSA25EF4A	KSA250ET4AF
KSA		KSA25ER4	KSA250AE4
KSA02CF5	KSB32CF5	KSA25ES4A	KSA250ET4A
KSA02DA50010	KSB32CM55	KSA25EZ1	KSB400ZF1
KSA05AZ1	Cancelled	KSA25LC40	KSA250DLC40
KSA05DA40010	KSB63SM48	KSA25LP41	KSA250DLE40
KSA05DA50010	KSB63SM58	KSA25LP42	KSA250DLF40
KSA05SF41	KSB50SF4	KSA25SF3	KSB250SE4
KSA05SF5	KSB50SF5	KSA25SF41	KSB250SE4
KSA10AB451	KSA100AB4	KSA25SF5	KSB250SE5

Replacement table former/new catalogue numbers (cont.)


Former cat. numbers	New cat. numbers	Former cat. numbers	New cat. numbers
KSA (cont.)		KSB50YA4	KSB50YA4
KSA25TC40	KSA250DTC40	KSB80FA2	KSA1000AF1
KSA25XC40	KSA250DXC40	KSB80YA4	KSB80YA4
KSA40AZ1	Cancelled	KSE	
KSA40DB411	KSB400DC4	KSE02CD5	KSB16CN5
KSA40DB412	KSB400DB412	KSE02CF5	KSB32CF5
KSA40DB511	KSB400DC5	KSE02CG5	KSB20CG5
KSA40DB512	KSB400DB512	KSE02SD41	KSB25SD4
KSA40ED430	KSA400ED4306	KSE02SD5	KSB25SD5
KSA40ED450	KSA400ED45010	KSE03SG41	KSB32SG4
KSA40SF3	KSB400SE4	KSE05DA4	KSB63SM48
KSA40SF41	KSB400SE4	KSE05DA5	KSB63SM58
KSA40SF5	KSB400SE5	KSE05SD41	KSB50SN4
KSA50AB452	KSA400AB4	KSE05SD5	KSB50SN5
KSA50AB452	KSA630ABD4	KSE05SF41	KSB50SF4
KSA50AB462	KSA400AB4	KSE05SF5	KSB50SF5
KSA50AB462	KSA630ABG4	KSE06SD41	KSB63SD4
KSA50BT402	KSA630ABT4	KSE06SD5	KSB63SD5
KSA50ED415	KSA400ED4156	KSE08SG41	KSB80SG4
KSA50ED415	KSA630ED4154	KSE10DA4	KSB100SM412
KSA50ED420	KSA400ED4208	KSE10DA5	KSB100SM512
KSA50ED420	KSA630ED4206	KSE10SD41	KSB100SE4
KSA50ED430	KSA500ED4306	KSE10SD5	KSB100SE5
KSA50ED450	KSA500ED45010	KSE10SF41	KSB100SF4
KSA50EF4A	KSA500ET4AF	KSE10SF5	KSB100SF5
KSA50ER4	KSA630AE4	KSE16DB411	KSB160DC4
KSA50ES4A	KSA630ET4A	KSE16DB511	KSB160DC5
KSA50LC40	KSA630DLC40	KSE16SD3	KSB160SE4
KSA50LP41	KSA630DLE40	KSE16SD41	KSB160S E4
KSA50LP42	KSA630DLF40	KSE16SD5	KSB160SE5
KSA50TC40	KSA630DTC40	KSE16SF3	KSB160SF4
KSA50XC40	KSA630DXC40	KSE16SF41	KSB160SF4
KSA63ED430	KSA630ED4306	KSE16SF5	KSB160SF5
KSA63ED450	KSA630ED45010	KSE16SG41	KSB160SG4
KSA63SF41	KSB630SE4	KSE25DB411	KSB250DC4
KSA63SF5	KSB630SE5	KSE25DB511	KSB250DC5
KSA80EF4A	KSA800ET4AF	KSE25SF3	KSB250SE4
KSA80ER4	KSA1000AE4	KSE25SF41	KSB250SE4
KSA80ES4A	KSA1000ET4A	KSE25SF5	KSB250SE5
KSA80EZ3	KSB1000ZF1	KSE25YA2	KSE25YA2
KSA80LC40	KSA1000DLC40	KSE25YA3	KSE25YA3
KSA80LP41	KSA1000DLE40	KSE40DB411	KSB400DC4
KSA80LP42	KSA1000DLF40	KSE40DB511	KSB400DC5
KSA80TC40	KSA1000DTC40	KSE40SF3	KSB400SE4
KSA80XC40	KSA1000DXC40	KSE40SF41	KSB400SE4
KSB		KSE40SF5	KSB400SE5
KSB25FA3	KSA400AF1	KSE80YA2	KSE80YA2
KSB25YA4	KSB25YA4		
KSB50FA2	KSA800AF1		

<i>Index</i>	3
<i>Introduction</i>	9
<i>Design guides and characteristics</i>	29
<i>Canalis KDP</i>	57
<i>Canalis KBA</i>	79
<i>Canalis KBB</i>	99
<i>Canalis KN</i>	121
<i>Canalis KS</i>	153
<i>Canalis KS riser</i>	205
<i>Canalis KT</i>	225
<i>Technical specifications</i>	231
<i>Maintenance</i>	239
<i>Recommendations for special applications</i>	243
<i>Catalogue numbers</i>	273
<i>Canalis worldwide</i>	279


Canalis worldwide

Canalis worldwide	280
--------------------------	------------


Tertiary

Name	Lighting and low voltage			Medium voltage		High voltage	Country
	KDP	KBA	KBB	KN	KS	KT	
Offices							
 PB108192.eps	Air France (headquarters)	■				■	France
	Allianz					■	Germany
	Axa		■			■	France
	Chamber of Commerce	■				■	Luxembourg
	Commerz Bank			■			Germany
	Lexel	■			■	■	Sweden
	Telefónica	■				■	Spain
	Trade Center		■			■	Spain
	RDC tower					■	Tunisia
	Turning Torso					■	Sweden
	Vodafone	■			■		New Zealand


Internet Data Centers

 PB108193.eps	Banco Commercial Português					■	■	Portugal
	Colt				■		■	France
	Digiplex				■	■		Sweden
	IBM		■		■	■	■	Spain, Italy
	MCI-Worldcom		■		■	■	■	Italy, United Kingdom


Hotels and restaurants

 PB108194.eps	Hyatt						■	Tunisia
	Mc Donald's	■						France
	Radisson SAS Stansted Airport						■	United Kingdom
	Soldeo Andorra Hotel					■	■	Spain

Hospitals

 PB108195.eps	Children Clinic					■	■	Sweden
	Brussels University Hospital	■						Belgium
	Derby Hospital					■	■	United Kingdom
	Oran Hospital				■		■	Algeria
	St Joseph Hospital					■		France
	Stockholm Hospital					■		Sweden
	Val de Grâce Hospital					■		France
	Michalon Hospital					■	■	France
	Manussia Hospital					■		Egypt

Supermarkets and hypermarkets

 PB108197.eps	Alcampo		■		■		■	Spain
	Auchan	■	■	■	■	■	■	World
	B&Q			■	■	■		United Kingdom
	Carrefour	■	■	■	■	■	■	World
	Coop		■		■	■		Italy
	Fnac		■				■	Spain, France
	Ikea	■	■		■	■	■	China, Spain, France, Sweden
	Mark & Spencer		■					Belgium, Spain, United Kingdom
	Toys'R Us					■		Spain

Industry

PB108196.eps

Car industry



Name	Lighting and low voltage			Medium voltage		High voltage	Country
	KDP	KBA	KBB	KN	KS	KT	
BMW		■	■	■	■		Italy
Citroën	■	■	■	■	■	■	China, Spain
Daewo					■		South Korea
Dacia		■	■	■	■	■	Romania
Iveco		■		■	■	■	Spain, Italy
Peugeot			■	■	■	■	China, Spain
Nissan		■	■	■	■	■	Spain
Renault		■	■	■	■	■	Spain, France, Czech Republic
Seat							Spain
Valéo		■			■	■	China, France, Italy, Poland
Volkswagen			■	■	■		Spain, Germany

Other industries

Aerospace industry

Airbus		■			■	■	Italy
--------	--	---	--	--	---	---	-------

Food-processing industry

Coca-Cola		■				■	Spain, Italy, Belgium
Danone		■			■	■	World
Pasquier				■	■		France

Livestock production farms and greenhouses

Favier henhouse	■	■					France
Greenhouse			■				Netherlands

Ceramic industry

Esmalglas ceramic		■	■	■	■	■	Spain
-------------------	--	---	---	---	---	---	-------

Electricity

Legrand		■					France, Turkey
---------	--	---	--	--	--	--	----------------

Watch-making

Rolex		■			■	■	Switzerland
-------	--	---	--	--	---	---	-------------

Microelectronics

Intel		■	■	■	■		Irelande
ST Micro-électronique		■		■	■	■	France

Lead industry and water treatment

Grundfos					■		China
----------	--	--	--	--	---	--	-------

Industrial technology

Bosch		■			■		China
-------	--	---	--	--	---	--	-------

Telephony

Phillips					■		Netherlands
Nokia		■			■		Sweden

Textile industry

Louis Vuitton		■		■	■		Spain
Delta		■		■			Israel

Infrastructures

Name	Lighting and low voltage			Medium voltage		High voltage	Country
	KDP	KBA	KBB	KN	KS	KT	
Paris airport		■	■	■	■	■	France
Cairo airport					■		Egypt
Heathrow airport				■	■	■	United Kingdom
Hong-Kong airport						■	China
Landvetter airport					■		Sweden
Arlanda		■			■	■	Sweden
Satelite Barajas						■	Spain

Airports



PB108198.eps

Marine



PB108199.eps

Chantier de l'Atlantique					■	■	France
Meyerwerft					■	■	Germany

Undergrounds



PB108200.eps

Guangzhou underground		■					China
London underground			■				United Kingdom
Madrid underground		■				■	Spain
Singapore underground						■	Singapore

Other infrastructures

Alexandria library					■	■	Egypt
Centre international d'exposition de Suzhou		■			■		China
CERN					■	■	Switzerland
Stade de France					■	■	France

Notes

Notes



Schneider Electric Industries SAS

35, rue Joseph Monier
CS 30323
92506 Rueil Malmaison Cedex
France

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

10-2016
DEBU022EN

© 2016 - Schneider Electric. All Rights Reserved.
All trademarks are owned by Schneider Electric Industries SAS or its affiliated companies.
ART960134

This document has been
printed on recycled paper

