

#### Modular Signal Towers / KombiSIGN 71

### Signal tower KS71 RM 24VAC/DC GN/YE/RD



Part No.: 649.240.05 Series: KombiSIGN 71

MECHANICAL DATA		
Height	299 mm	
Diameter	70 mm	
Materials	PA-GF PC	
Dome colour	Green Red Yellow	
Housing colour	Black	
Protection category	IP65	
Connection	Spring-type terminal	
cross-sectional area minimum	0,25mm <sup>2</sup> / 24AWG	
cross-sectional area maximum	1,50mm <sup>2</sup> / 16AWG	
Cable entry	Through hole	
Cable entry maximum	d = 14 mm	
Type of fixing	Tube mounting	
Working temperature minimum	-20°C	
Working temperature maximum	+50°C	
Weight with packaging	355 g	
Product weight	299 g	

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	30 mA	
Rated inrush current	500 mA	
Protection class	Protection class 2	
Pollution degree	3	

OPTICAL DATA	
Light source	LED
Light colour	Green Red Yellow
Optical signal image	Permanent
Service life optical	100,000 h maximum

#### **APPROVAL DATA**

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



#### Modular Signal Towers / KombiSIGN 71

# Signal tower KS71 RM 24VAC/DC GN/YE/RD


Conforms with CE	Yes (through the components)
Conforms with RoHS directive	Fulfills substance restriction
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Modular Signal Towers / KombiSIGN 71

## Signal tower KS71 RM 24VAC/DC GN/YE/RD

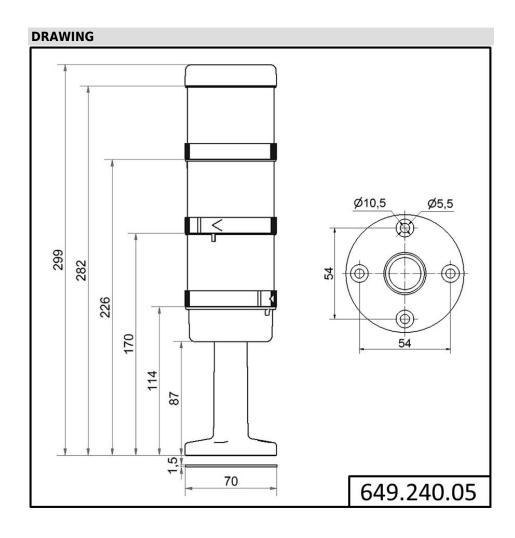

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.