
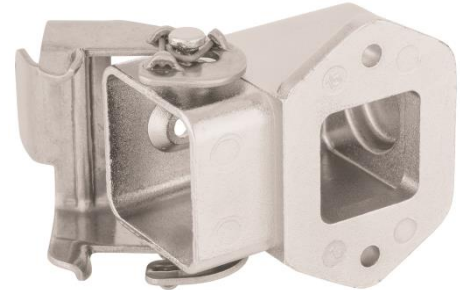


10423202	<b>DATA SHEET</b>	
Valid from: 17.09.2018	<b>EPIC<sup>®</sup> ULTRA H-A 3 MAGS</b>	

## Description

- EMC protection
- Corrosion-resistant
- Protection rating UL50E tested
- All-purpose due to high corrosion resistance and high environmental protection



## General Characteristics

Series	ULTRA H-A 3
Version	Panel-mount base angled
Locking mechanism	single lever
Protection (DIN EN 60529)	IP 65 (latched)
Protection (NEMA 250, UL50E)	4, 4X, 12 (latched)
Temperature Range	-40°C to +100°C, short-term up to +125°C
Holding screws for inserts included	yes

## Materials and surfaces

Housing, base material	Zinc die-casting
Housing, surface	Nickel-plated
Lever	Stainless steel
Holding screws for inserts	Stainless steel
Gasket	NBR


## Approvals

VDE-Approval, VDE-REG.-Nr.	B437
----------------------------	------

## Standards

Safety Standard	IEC 61984
-----------------	-----------

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB10423202EN Version: 01	Page 1 of 2
---	---------------------------------------	-------------

10423202	<b>DATA SHEET</b>	
Valid from: 17.09.2018	<b>EPIC<sup>®</sup> ULTRA H-A 3 MAGS</b>	

## Drawings



## Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB10423202EN Version: 01	Page 2 of 2
---	---------------------------------------	-------------