# **PHILIPS** Lighting



# MASTER VALUE LEDspot MV

# MAS LED spot VLE DT 3.7-35W GU10 927 36D

Delivering a warm, halogen-like accent beam, MASTER VALUE is a perfect fit for spot lighting. Thanks to its high CRI, it realizes more natural colors, creating cozy and comfortable ambiences for residential and hospitality projects, and emphasizing the beauty of merchandise in retail. These LED spots MV GU10 have the familiar look and feel of spot lamps, keeping the classic beauty of glass spots and adding the strong performance of LED technology. The dimming function enables you to create the atmosphere you desire, and it works with broad selection of dimmers. MASTER VALUE also offers more energy savings that normal LED spots.

## Warnings and Safety

- $\cdot$  Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

#### **Product data**


General Information		Luminous Intensity (Nom)	500 cd
Cap-Base	GU10 [GU10]	Color Designation	Warm Glow(WG)
Nominal lifetime	25,000 hour(s)	Correlated Color Temperature (Nom)	2200 2700 K
Switching Cycle	50,000	Luminous Efficacy (rated) (Nom)	72.00 lm/W
Lighting Technology	LED	Color Consistency	<6
Flux measurement reference	Narrow Cone	Color rendering index (CRI)	90
		LLMF At End Of Nominal Lifetime (Nom)	70 %
Light Technical		Luminous Flux in 90° Cone (Rated)	270 lumen
Color Code	922-927 [CCT of 2200K-2700K]		
Beam Angle (Nom)	36 degree(s)	Operating and Electrical	
Luminous Flux	270 lumen	Line Frequency	50 to 60 Hz

# MASTER VALUE LEDspot MV

Input Frequency	50 to 60 Hz	
Power Consumption	3.7 W	
Lamp Current (Nom)	18 mA	
Wattage Equivalent	35 W	
Starting Time (Nom)	0.5 s	
Warm-up time to 60% light	0.5 s	
Power Factor (Fraction)	0.9	
Voltage (Nom)	220-240 V	
Temperature		
T-Case Maximum (Nom)	70 ℃	
Controls and Dimming		
Dimmable	Only with specific dimmers	
Mechanical and Housing		
Bulb Shape	PAR16 [PAR 2 inch/50mm]	


Approval and Application	
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	4 kWh
EPREL Registration Number	467,611
CE mark	Yes
EU RoHS compliant	Yes
Product Data	
Full product code	871951431228900
Order product name	MAS LED spot VLE DT 3.7-35W GU10 927 36D
Order code	929002979702
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material number (12NC)	929002979702
Full product name	MAS LED spot VLE DT 3.7-35W GU10 927 36D
EAN/UPC - Case	8719514312296


#### **Dimensional drawing**



MAS LED spot VLE DT 3.7-35W GU10 927 36D 50 r	mm 54 mm

## Photometric data






Light Distribution Diagram - MAS LED spot VLE DT 3.7-35W GU10 927 36D


# MASTER VALUE LEDspot MV

Photometric data

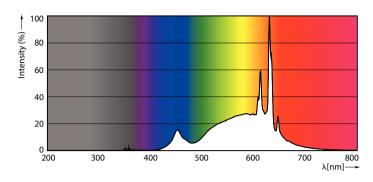

Spectral Power Distribution Colour - MAS LED spot VLE DT 3.7-35W GU10 927 36D

#### Lifetime

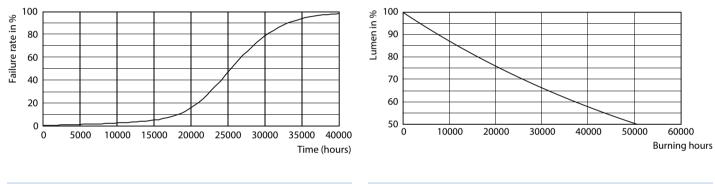

Life Expectancy Diagram - MAS LED spot VLE DT 3.7-35W GU10 927 36D

Lumen Maintenance Diagram - MAS LED spot VLE DT 3.7-35W GU10 927 36D



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, May 19 - data subject to change