

61806680	DATA SHEET	
Valid from: 03.07.2018	SILVYN® SPLIT COV-M	


Our straight divisible metric fitting SILVYN® SPLIT COV-M, made of polyamide 6, properly suits with the divisible protection conduit SILVYN® SPLIT.
The conduit gland allows an easy retrofit application on existing installations with the capability or to the divisible locknut.



- Material:** Polyamide 6
- Features:** Free of halogen and cadmium
Fire classification: V2 acc. to UL94
Glow wire test: 850°C acc. to DIN EN 60695-2-10
Oxygen index: >28 acc. to DIN EN ISO 4589-2
- Colour:** Black
- Temperature range:** -45°C up to +120°C

Norm Reference: 
DIN EN 61386

Protection class: IP 44 acc. to DIN EN 60529

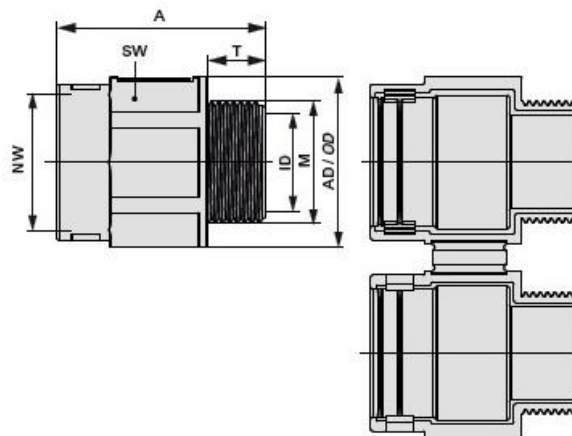

Dimension table:

Part No.	Nominal width NW	Thread M	Thread length T mm	Diameter mm		Length A mm	Wrench size SW mm
				ID	AD/OD		
6180 6680	10	M16x1,5	11,0	11,0	21,0	34,0	19
6180 6681	14	M20x1,5	11,0	14,6	29,0	41,0	27
6180 6682	20	M25x1,5	12,0	19,0	35,0	43,0	32
6180 6683	23	M32x1,5	15,0	26,0	44,0	50,5	40
6180 6684	37	M40x1,5	19,0	32,0	53,0	59,0	48
6180 6685	45	M50x1,5	21,0	42,0	69,0	69,5	64

Suitable accessories: SILVYN® SPLIT GMP-M
SILVYN® SPLIT

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: M. Wegerer PDP Released: DAMU1/PDP	Document: DB61806680EN Version: 03	Page 1 of 1
--	---------------------------------------	-------------