

**BVK 16.48 6.10 FL40 BSB STBL (308 045)**


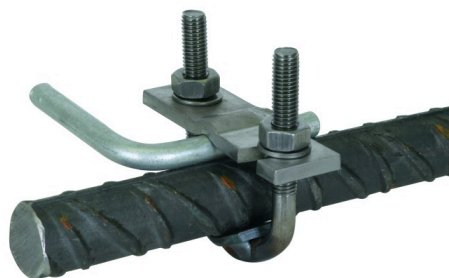


Figure without obligation

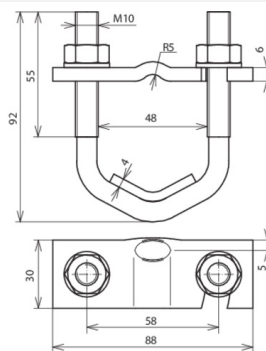

Type	BVK 16.48 6.10 FL40 BSB STBL
Part No.	308 045
Material	St/bare
Clamping range Rd / Rd	(II) 16-48 / 6-10 mm
Clamping range Rd / FI	(II) 16-48 / 30-40 mm
Screw	U-bolt M10 x 48 mm
Material of screw	St/bare
Lightning current carrying capability (10/350 μs)	30 kA <sup>*)</sup>
Standard	EN 62561-1
Short-circuit current (a.c. 50 Hz / d.c.) (1 s; ≤ 300 °C)	16 kA
Weight	262 g
Customs tariff number	85389099
GTIN	4013364124455
PU	25 Stk

<sup>\*)</sup> For exact assignment see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.