

Lighting

PHILIPS

MASTERColour CDM-TD

MASTERC CDM-TD 150W/942 RX7s 1CT

Range of double-ended, compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- \cdot The luminaire must be able to contain hot lamp parts if the lamp ruptures
- · Lamps may use electronic or electromagnetic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

Operating and Electrical		Chromaticity Coordinate X (Nom)	0.371
Power Consumption	152.0 W	Chromaticity Coordinate Y (Nom)	0.366
Voltage (Nom)	103 V	Correlated Color Temperature (Nom)	4200 K
Voltage (Nom)	103 V	Luminous Efficacy (rated) (Nom)	90 lm/W
		Color rendering index (CRI)	96
General Information			
Cap-Base	RX7S [RX7s]	Controls and Dimming	
Operating Position	P45 [Parallel +/-45D or Horizontal(HOR)]	Dimmable	No
Flux measurement reference	Sphere		
		Mechanical and Housing	
Light Technical		Bulb Finish	Clear
Color Code	942 [CCT of 4200K]	Bulb Shape	T22 [T 22mm]
Luminous Flux	13,650 lumen		
Color Designation	Cool White (CW)		

MASTERColour CDM-TD

Approval and Application				
Mercury (Hg) Content (Max)	8.3 mg			
Mercury (Hg) Content (Nom)	8.29 mg			
Energy Consumption kWh/1000 h	152 kWh			
EPREL Registration Number	473,340			
Product Data				
Full product code	871150020025915			
Order product name	MASTERC CDM-TD 150W/942 RX7s 1CT			


Order code	928084805133		
Numerator - Quantity Per Pack	1		
Numerator - Packs per outer box	12		
Material number (12NC)	928084805133		
Full product name	MASTERC CDM-TD 150W/942 RX7s 1CT		
EAN/UPC - Case	8711500200266		

Dimensional drawing



Product	D (max)	D	0	C (max)
MASTERC CDM-TD 150W/942 RX7s 1CT	22 mm		10 mm	137.43 mm

Photometric data

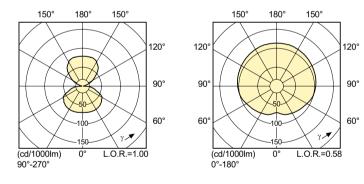


Light Distribution Diagram - MASTERC CDM-TD 150W/942 RX7s 1CT

300 Spectral Power Distribution Colour - MASTERC CDM-TD 150W/942 RX7s 1CT

MASTERColour CDM-TD

Lifetime

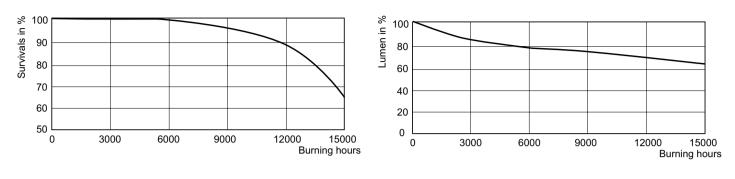

Life Expectancy Diagram - MASTERC CDM-TD 150W/942 RX7s 1CT

Lumen Maintenance Diagram - MASTERC CDM-TD 150W/942 RX7s 1CT



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, May 16 - data subject to change