


PRODUCT-DETAILS

MARL101AR

MARL101AR Auxiliary Contact Block

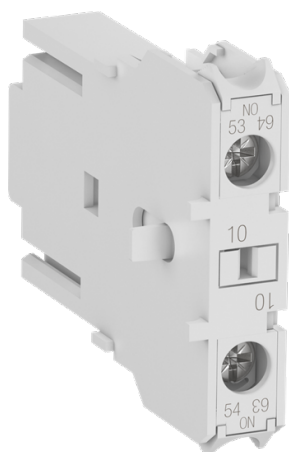

Algemene informatie

Type	MARL101AR
Artikelnummer	1SAL103357R9906
EAN	4013614552342
Omschrijving	MARL101AR Auxiliary Contact Block
Omschrijving	The MARL101AR is an auxiliary contact for side mounting with 1NC contact and ring tongue terminals. Auxiliary contacts are used for the operation of auxiliary circuits and control circuits. The auxiliary contact meets the requirements of EN 50005.

Ordering

Minimale bestelhoeveelheid	1 stuk
Numeroer douanetarief	85365080

Popular Downloads

Instructies en handleidingen	2CDC102076M9901
CAD Dimensional Drawing	2CDC001079B0201

Dimensions

Product netto breedte	9.8 mm
-----------------------	--------

Product netto hoogte	42.5 mm
Product netto diepte	56 mm
Product netto gewicht	0.017 kg

Technical

Nominaal bedrijfsvoltage	Auxiliary Circuit 690 V AC Auxiliary Circuit 440 V DC
Toegekende frequentie (f)	Auxiliary Circuit 50 Hz Auxiliary Circuit 60 Hz Auxiliary Circuit DC
Nominale impuls grensvoltage (U_{imp})	Auxiliary Circuit 6 kV
Nominaal isolatievoltage (U_i)	750 V
Aantal polen	1
Beschermingsgraad	IP20
Verbindingscapaciteit hulpcircuit	Flexible 1/2x 0.75 ... 2.5 mm ² Rigid 1/2x 0.75 ... 2.5 mm ²
Aanhaalmoment	Auxiliary Circuit 0.8 N·m
Kabelstriplengte	Auxiliary Circuit 9 mm
Aanbevolen schroevendraaier	Auxiliary Circuit Pozidriv 2
Normen	IEC/EN 60947-1 IEC/EN 60947-5-1 UL 60947-1 UL 60947-5-1
Aantal hulpcontacten NO	0
Aantal hulpcontacten NC	1
Aantal hoofdcontacten NC	0
Aantal hoofdcontacten NO	0
Conventionele vrije-lucht thermische stroom (I_{th})	Auxiliary Circuit 10 A
Productnaam	Auxiliary Contact Block
Geschikt voor	MC1 MC2 MCR equipped with Ring Tongue terminals
Geschikt voor productklasse	Mini Contactors

Technical UL/CSA

Maximale bedrijfsspanning UL/CSA	600 V AC
Verbindingscapaciteit hulpcircuit UL/CSA	Stranded 18-12 AWG
Aanhaalmoment UL/CSA	Auxiliary Circuit 7 in·lb
Contactklasse UL/CSA	A600 Q600

Environmental

Omgevingsluchttemperatu ur	Werking -40 ... +70 °C Opslag -55 ... +80 °C
Maximale werkhoogte toegestaan	3000 m
RoHS-status	Following EU Directive 2011/65/EU and Amendment 2015/863 July 22, 2019

Certificates and Declarations

CB-certificaat	1SAA971002-2001
CQC-certificaat	CQC2019010304193150

Declaration of Conformity - CCC	2020980304001604
Conformiteitsverklaring - CE	1SAD101100-3201
Declaration of Conformity - UKCA	1SAD201100-3201
RINA-certificaat	1SAA971000-0801
UL-certificaat	E48139-19880826

Container Information

Pakketniveau 1 Breedte	99 mm
Pakketniveau 1 Lengte	20 mm
Pakketniveau 1 Hoogte	100 mm
Pakketniveau 1 Brutogewicht	0.02 kg
Pakketniveau 1 EAN	4013614552342
Pakketniveau 1 Units	tas 1 stuk
Pakketniveau 2 Breedte	100 mm
Pakketniveau 2 Lengte	150 mm
Pakketniveau 2 Hoogte	105 mm
Pakketniveau 2 Brutogewicht	0.22 kg
Pakketniveau 2 EAN	4013614552380
Pakketniveau 2 Units	doos 10 stuk

Classifications

Object classificatiecode	K
ETIM 5	EC000041 - Auxiliary contact block
ETIM 6	EC000041 - Hulpcontactblok
ETIM 7	EC000041 - Auxiliary contact block
ETIM 8	EC000041 - Hulpcontactblok
eClass	V11.0 : 27371302
UNSPSC	39121522
E-Number (Finland)	3709633

Categorieën

Laagspanningsproducten en -systemen → Control Producten → Magneetschakelaars → Minischakelaars toebehoren

