


## PHEG1 S P SN7240 (767 636)

- Earth clamp with adjustable handle
- Insulating stick with plug-in coupling as end fitting for extending the handle
- Easy transport due to detachable insulating stick

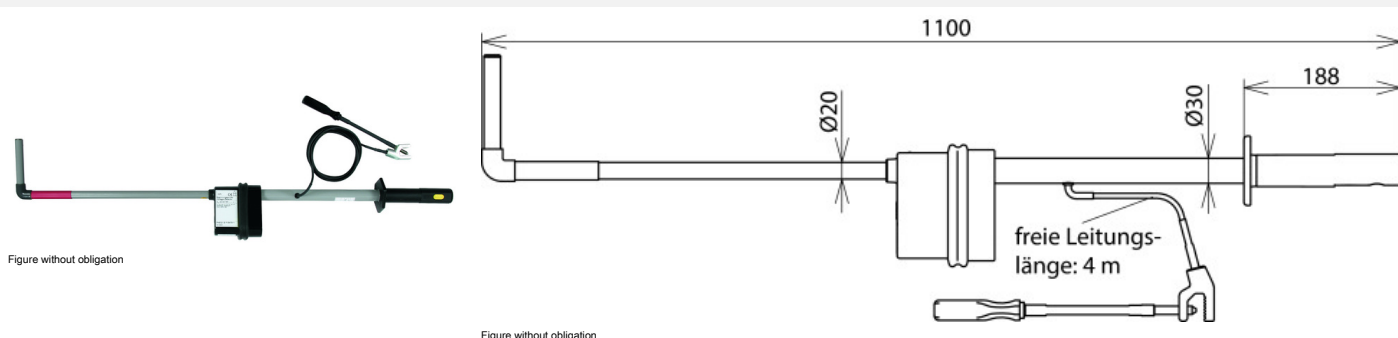

Type	PHEG1 S P SN7240
Part No.	767 636
Threshold voltage ( $U_t$ )	60 V
Nominal voltage ( $U_N$ )	3.8 kV
Type of voltage	d.c.
Length (indicator with test prod) ( $l_s$ )	615 mm
Length (insulating stick) ( $l_i$ )	550 mm
Length (earthing cable)	4000 mm
Total length ( $l_a$ )	1100 mm
Standard	Based on EN/IEC 61243-2 (DIN VDE 0682-412)
Temperature range	-25 °C ... +55 °C, climatic category N
For use at	▲
For	Indoor and outdoor installations
Application	Switchgear installations
Design	Two-pole
Indication	Indoor and outdoor installations, for example d.c. voltage systems (electrified rail networks, d.c. links)
Self-testing element	Yes
Material (test electrode)	Copper alloy/gal Sn
Material (test prod)	Glass-fibre reinforced polyester tube
Material (indicator)	Plastic, fully insulated
Material (insulating stick)	Glass-fibre reinforced polyester tube
Material (connecting cable)	Highly flexible copper cable
Weight	2,31 kg
Customs tariff number	90303370
GTIN	4013364155886
PU	1 Stk

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.