

MasterConnect LEDtube EM/mains T8

MC LEDtube IA 600mm HO 7W840 T8

Introducing MasterConnect LEDtubes - smart retrofit LED T8 lamps that give you an easy and seamless way to upgrade to connected lighting. Simply set up with an intuitive app and MasterConnect LED tube lighting can be programmed to maximize energy savings, while providing wireless and automated light for your comfort and convenience. What's more, it is fully scalable and upgradable. If you want to enjoy additional benefits such as remote control or a management dashboard, you can simply keep the lamps you currently have installed and add a gateway to experience all the advantages of a cloud-based system. There's no better way to take lighting solutions to the next level.

Product data

| General Information | | | | | |
|------------------------------------|---------------------------------|--|--|--|--|
| Cap-Base | G13 [Medium Bi-Pin Fluorescent] | | | | |
| Nominal lifetime | 60,000 hour(s) | | | | |
| Switching Cycle | 200,000 | | | | |
| Lighting Technology | LED | | | | |
| Flux measurement reference | Sphere | | | | |
| | | | | | |
| Light Technical | | | | | |
| Color Code | 840 [CCT of 4000K] | | | | |
| Beam Angle (Nom) | 160 degree(s) | | | | |
| Luminous Flux | 1,050 lumen | | | | |
| Color Designation | Cool White (CW) | | | | |
| Correlated Color Temperature (Nom) | 4000 K | | | | |
| Luminous Efficacy (rated) (Nom) | 150 lm/W | | | | |
| Color Consistency | <6 | | | | |
| Color rendering index (CRI) | 83 | | | | |
| | | | | | |

| LLMF At End Of Nominal Lifetime (Nom) 70 $\%$ | | | | | |
|---|-----------------|--|--|--|--|
| | | | | | |
| Operating and Electrical | | | | | |
| Line Frequency | 50 to 60 Hz | | | | |
| Input Frequency | 50 to 60 Hz | | | | |
| Power Consumption | 7 W | | | | |
| Starting Time (Nom) | 0.5 s | | | | |
| Warm-up time to 60% light | 0.5 s | | | | |
| Power Factor (Fraction) | 0.9 | | | | |
| Voltage (Nom) | 220-240 V | | | | |
| | | | | | |
| Temperature | | | | | |
| Ambient temperature range | -20 °C to 45 °C | | | | |
| T-Case Maximum (Nom) | 40 °C | | | | |
| | | | | | |
| | | | | | |


Datasheet, 2023, May 22 data subject to change

MasterConnect LEDtube EM/mains T8

| Controls and Dimming | | | | |
|-------------------------------|--|--|--|--|
| Dimmable | Wireless Dim | | | |
| | | | | |
| Mechanical and Housing | | | | |
| Product Length | 600 mm | | | |
| Bulb Shape | Tube, double-ended | | | |
| | | | | |
| Approval and Application | | | | |
| Energy Saving Product | Yes | | | |
| Approval Marks | RoHS compliance TUV CE marking KEMA Keur | | | |
| | certificate | | | |
| Energy Consumption kWh/1000 h | 7 kWh | | | |
| EPREL Registration Number | 406,206 | | | |
| CE mark | Yes | | | |


| EU RoHS compliant | Yes | | | |
|---------------------------------|---------------------------------|--|--|--|
| | | | | |
| Product Data | | | | |
| Full product code | 871869971748300 | | | |
| Order product name | MC LEDtube IA 600mm HO 7W840 T8 | | | |
| Order code | 929002295302 | | | |
| Numerator - Quantity Per Pack | 1 | | | |
| Numerator - Packs per outer box | 10 | | | |
| Material number (12NC) | 929002295302 | | | |
| Full product name | MC LEDtube IA 600mm HO 7W840 T8 | | | |
| EAN/UPC - Case | 8718699717490 | | | |
| | | | | |


Dimensional drawing



| Product | D1 | D2 | A1 | A2 | А3 |
|------------------------------|---------|-------|----------|----------|----------|
| MC LEDtube IA 600mm HO 7W840 | 25.8 mm | 28 mm | 588.5 mm | 595.5 mm | 602.5 mm |
| T8 | | | | | |

Photometric data






Spectral Power Distribution Colour - MC LEDtube IA 600mm HO 7W840 T8


MasterConnect LEDtube EM/mains T8


Photometric data




Light Distribution Diagram - MC LEDtube IA 600mm HO 7W840 T8

Lifetime

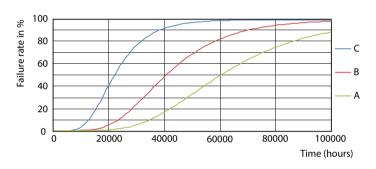




Life Expectancy Diagram - MC LEDtube IA 600mm HO 7W840 T8

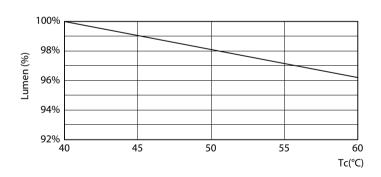

Life Expectancy Diagram - MC LEDtube IA 600mm HO 7W840 T8

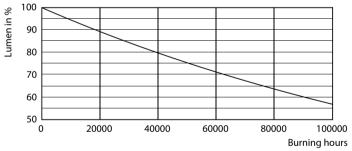


Lumen Maintenance Diagram - MC LEDtube IA 600mm HO 7W840 T8

Lumen Maintenance Diagram - MC LEDtube IA 600mm HO 7W840 T8

MasterConnect LEDtube EM/mains T8

Lifetime

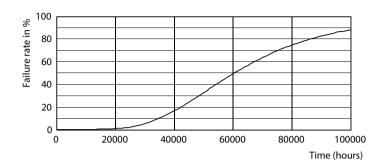

Life Expectancy Diagram - MC LEDtube IA 600mm HO 7W840 T8



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.