



MASTERColour CDM-T

MASTERC CDM-T 70W/830 G12 1CT/12

Range of single-ended, compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Lamps may use electronic or electromagnetic control gear, except 35W/942 and 20W lamps, which must use electronic control gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


perating and Electrical		Color Designation	Warm White (WW)
Power Consumption	73.2 W	Chromaticity Coordinate X (Nom)	0.434
Voltage (Nom)	88 V	Chromaticity Coordinate Y (Nom)	0.398
/oltage (Nom)	88 V	Correlated Color Temperature (Nom)	3000 K
		Luminous Efficacy (rated) (Nom)	85 lm/W
General Information		Color rendering index (CRI)	84
Cap-Base	G12 [G12]		
Operating Position	UNIVERSAL [Any or Universal (U)]	Controls and Dimming	
Flux measurement reference	Sphere	Dimmable	No
Light Technical		Mechanical and Housing	
Color Code	830 [CCT of 3000K]	Bulb Finish	Clear
Luminous Flux	6,200 lumen		

MASTERColour CDM-T

Bulb Shape	T19 [T 19mm]
Approval and Application	
Mercury (Hg) Content (Max)	4.6 mg
Mercury (Hg) Content (Nom)	4.6 mg
Energy Consumption kWh/1000 h	74 kWh
EPREL Registration Number	473,328
Product Data	
Full product code	871150019699615

Order product name	MASTERC CDM-T 70W/830 G12 1CT/12		
Order code	928082305125		
Numerator - Quantity Per Pack	1		
Numerator - Packs per outer box	12		
Material number (12NC)	928082305125		
Full product name	MASTERC CDM-T 70W/830 G12 1CT/12		
EAN/UPC - Case	8711500197009		

Dimensional drawing



MASTERC CDM-T 20 mm 0.75 inch 7 mm 55 mm 57 mm 56 mm 103 mm 70W/830 G12 1CT/12

о


L(min) L(max) L

C (max)


D (max) D

Product

Photometric data

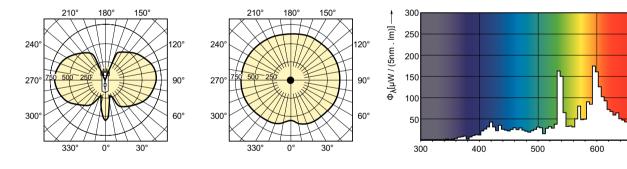

Light Distribution Diagram - MASTERC CDM-T 70W/830 G12 1CT/12




700

λ[nm] -

MASTERColour CDM-T

Lifetime

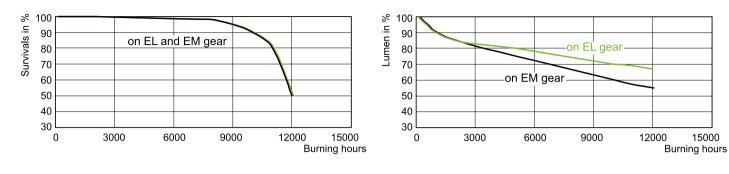

Life Expectancy Diagram - MASTERC CDM-T 70W/830 G12 1CT/12

Lumen Maintenance Diagram - MASTERC CDM-T 70W/830 G12 1CT/12



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, May 16 - data subject to change