

# WLD+40001\_CASAMBI

WLD+40001\_CASAMBI



Power **5 W**  
Colour temperature **3000 K**  
Beam angle **165 °**  
Degree of protection (IP) **IP20**

Voltage **48 V**  
Colour of light **WW**  
UGR **<19**

## Technical data

Code	WLD+40001_CASAMBI
Power	5 W
Nominal current	100 mA
Voltage	48 V
Energy consumption	5 kWh/1000h
Frequency	DC Hz
Protection class	III
Manufacturer of power supply	tuobo
Power factor	1
Useful luminous flux*	550 lm (360°)
Luminous flux**	435 lm (360°)
Lamp efficacy	110 lm/W
Luminous intensity	90 cd
Colour temperature	3000 K
Colour of light	WW
Beam angle	165 °
UGR	<19
RA	>90
Light source included	Yes
Producer of LED diodes	osram
Uniformity of color SDCM max	5
Dimmable	CASAMBI
Working temperature range	-20 to +40 °
Lifespan	50000 h
Housing material	AL+PC
Degree of protection (IP)	IP20
Colour	White/Black
Dimension (AxBxC)	100 (850mm wire) mm
For use	Inside
Assembly method	NA SZYŃĘ
Application	Inside
Made in	PRC
Other	CASAMBI ,






5 lat gwarancji  
5 years warranty

48V

815 mm

100 mm

Montaż oprawy w obrebie szyny na „click” oraz  
możliwość swobodnego jej przesuwania

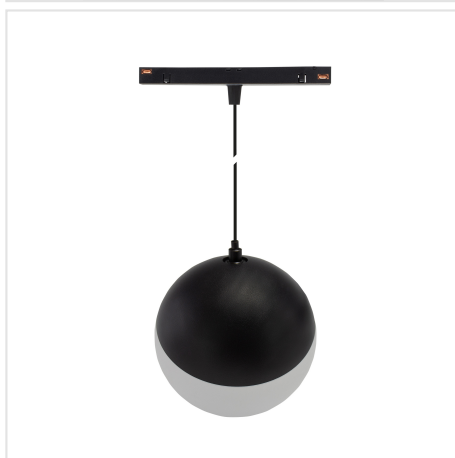

5 lat gwarancji  
5 years warranty

48V

815 mm

100 mm

Montaż oprawy w obrebie szczyby na „click” oraz  
możliwość swobodnego jej przesuwania

5 lat gwarancji  
5 years warranty

48V

815 mm

100 mm

Luminaire assembly within the track on “click” and its free arrangement

