

ALGINE

SLI035012CW


LED panel ALGINE, with a power of 32 W, high light efficacy 103 lm/W. It shines with a cold light colour (6000K), which is suitable for rooms where we need to be most focused and concentrated, such as technical workstations. Suitable for surface, recessed and suspended mounting.

IK06

Power	32 W	Voltage	230 V
Luminous flux*	3300 lm (120°)	Colour temperature	6000 K
Colour of light	CW	Beam angle	120 °
UGR	<22	IK	06


Technical data

Code	SLI035012CW
Power	32 W
Nominal current	154 mA
Voltage	230 V
Energy efficiency class	E
Energy consumption	32 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Power factor	0.9
Useful luminous flux*	3300 lm (120°)
Luminous flux**	3300 lm (360°)
Lamp efficacy	103 lm/W
Colour temperature	6000 K
Colour of light	CW
Beam angle	120 °
UGR	<22
RA	80
Uniformity of color SDCM max	5
Dimmable	OPC
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Aluminum, PLASTIC
IK	06
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	595x595x10 mm
Mounting hole	575x575 mm
For use	Inside
Assembly method	Recessed, On the ceiling, Suspended
Application	INT
Made in	PRC

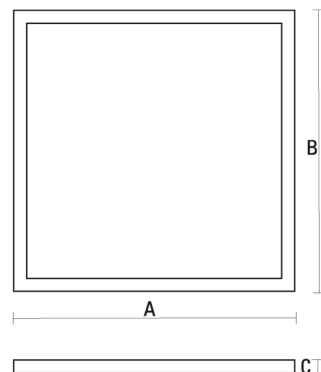


Related documents



 User manual



 Declaration of Conformity



 Photometric file



 3D model

