

Lighting

PHILIPS

MASTER TL-D Xtreme

MASTER TL-D Xtreme 36W/865 SLV

This MASTER TL-D Xtreme lamp offers extremely long lifetime. This results in extralow lamp cost over life. It is therefore suitable for places where lamp replacement is expensive, due to high ceilings or disturbance of operations, and applications with long burning cycles, e.g. tunnels, oil rigs, manufacturing lines. It can be operated on existing gear or dedicated HF Xtreme gear.

Warnings and Safety

- To achieve published lifetimes for 100% operation, do not dim below 30%
- When used on electromagnetic gear, it is strongly recommended to apply only Philips S10 or S10E starters (for 18W types S2 or S2E) to achieve the published lifetimes, and to install new starters when relamping.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		Operating and Electrical		
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Power Consumption	36.4 W	
Flux measurement reference	Sphere	Lamp Current (Nom)	0.430 A	
Light Technical		Controls and Dimming		
Color Code	865 [CCT of 6500K]	Dimmable	Yes	
Luminous Flux	3,150 lumen			
Color Designation	Cool Daylight	Mechanical and Housing		
Chromaticity Coordinate X (Nom)	0.313	Bulb Shape	T8 [26 mm (T8)]	
Chromaticity Coordinate Y (Nom)	0.337			
Correlated Color Temperature (Nom)	6500 K	Approval and Application		
Luminous Efficacy (rated) (Nom)	88 lm/W	Mercury (Hg) Content (Max)	3 mg	
Color rendering index (CRI)	80	Mercury (Hg) Content (Nom)	3.0 mg	
		Energy Consumption kWh/1000 h	37 kWh	

MASTER TL-D Xtreme


EPREL Registration Number	423,631		
Product Data			
Full product code	871150089277540		
Order product name	MASTER TL-D Xtreme 36W/865 SLV		
Order code	927982386514		
Numerator - Quantity Per Pack	1		

Numerator - Packs per outer box	25		
Material number (12NC)	927982386514		
Full product name	MASTER TL-D Xtreme 36W/865 SLV		
EAN/UPC - Case	8711500892782		

Dimensional drawing


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Xtreme	28 mm	1,199.4 mm	1,206.5 mm	1,204.1 mm	1,213.6 mm
36W/865 SLV					

Photometric data




Spectral Power Distribution Colour - MASTER TL-D Xtreme 36W/865 SLV

Lifetime

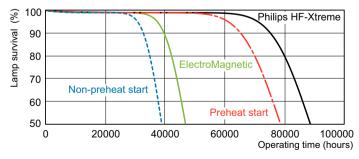


Life Expectancy Diagram - MASTER TL-D Xtreme 36W/865 SLV

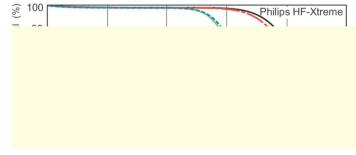

Life Expectancy Diagram - MASTER TL-D Xtreme 36W/865 SLV

MASTER TL-D Xtreme

Lifetime

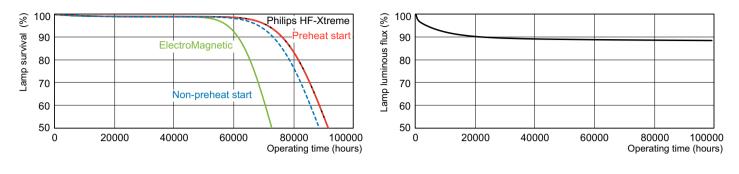

Life Expectancy Diagram - MASTER TL-D Xtreme 36W/865 SLV





© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, May 16 - data subject to change