
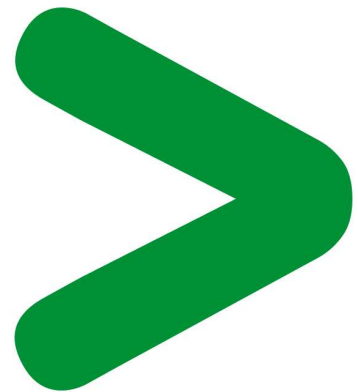


Product End-of-Life Instructions

Enerlin'X
BSCM ULP

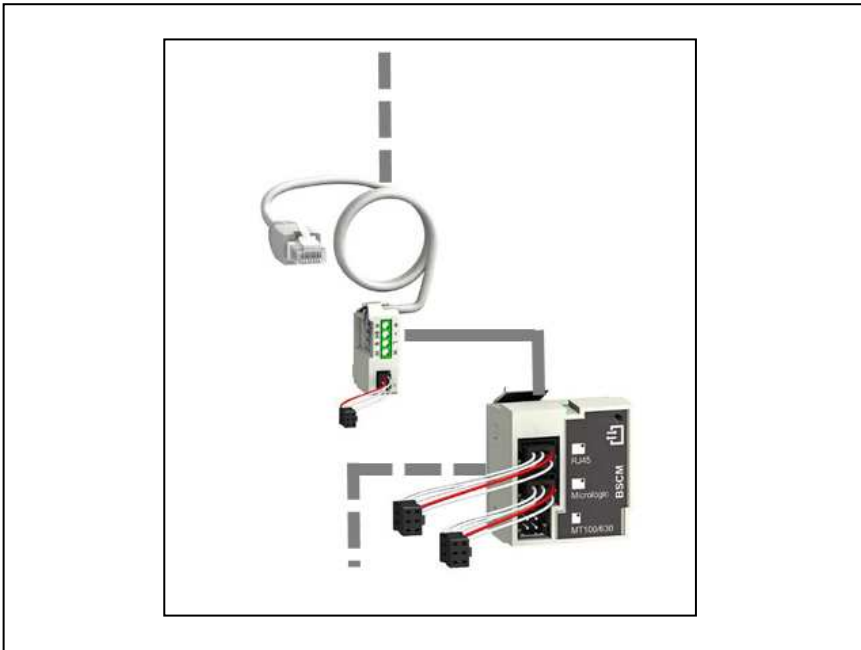

Product End-of-Life Instructions – EoLI

Product overview

Product Range: Enerlin'X

Marketing Model/Name: LV434205, LV434201

Size: H x L x D in mm = **34.0 x 27.8 x 25.4 (LV434205)**

35.8 x 12.3 x 26.3 (LV434201)

Weight in g = 88.1

Purpose

The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.

Operations recommended for the end of life treatment


There are several steps to process the products at the end of life so as to recover components, materials or energy :

Reuse → Separation for special treatment → Other dismantling → Shredding

CAUTION: The product contains 2 PCBAs and 2 plastic parts with brominated FR which are recommended to be treated separately during the End of Life operations.

Product End-of-Life Instructions – EoLI

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

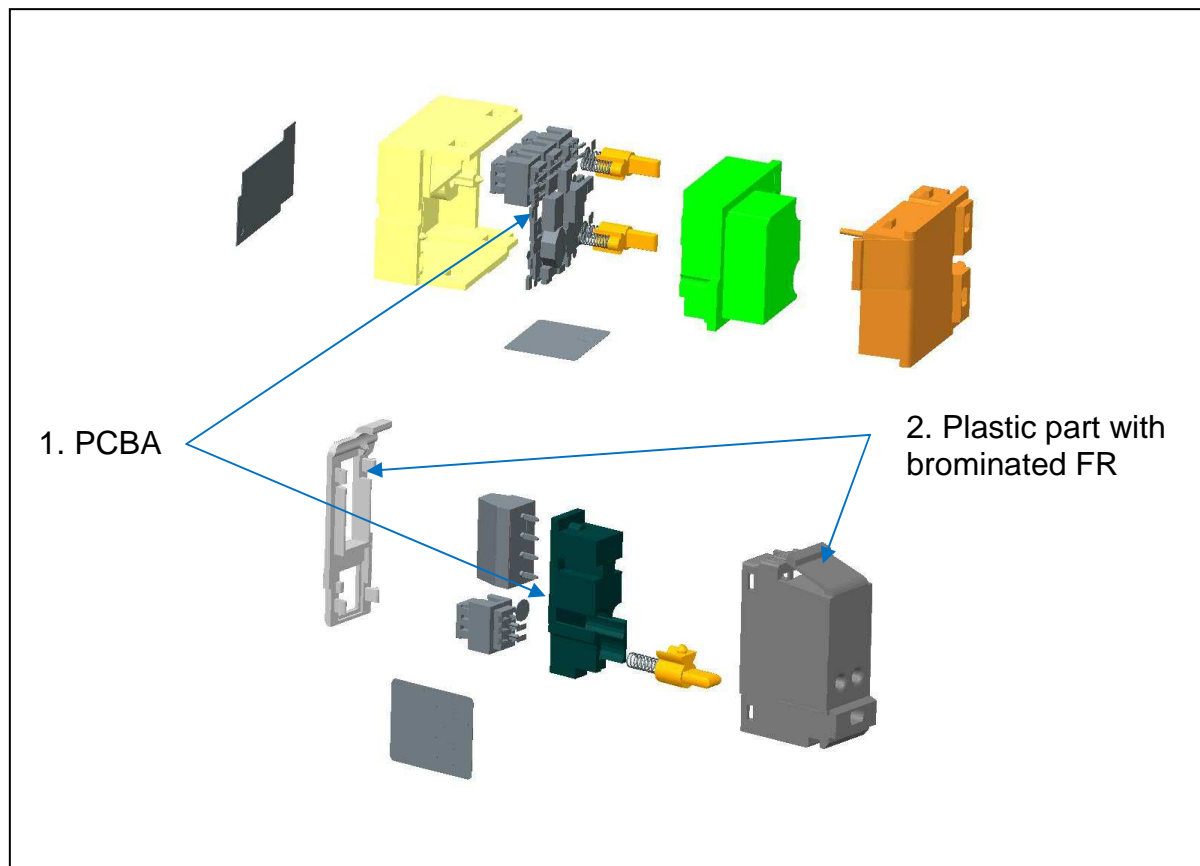

Recommendation	Number on drawing	Components	Weight (in g)	Comment
Special treatment	1	PCBA	8.7	
	2	Plastic parts with brominated FR	3.5	

EoLI achieved with Schneider-Electric TT03 V5 procedure

Schneider Electric Industries SAS

35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com