

item number: **NIXKZN 20X40**

length of cable tray: 2000 mm

thickness of metal sheet: 0,8 mm

product description: Cable tray is designed to create a cable route.
The joining of the trays is performed using the coupling NIXS 40 and two NIXSMP 5X10




configuration: IX - stainless steel AISI 304
(AISI 316, AISI 316L only to order)


sales amount: á 2 m

certification: EN 61537:02

storage: EN 60721-3-1

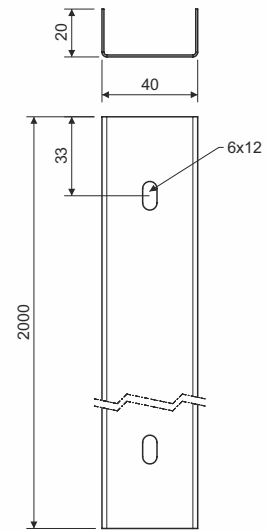

The graph shows the maximum allowed even loading of the tray in relation to the distances of the supports.

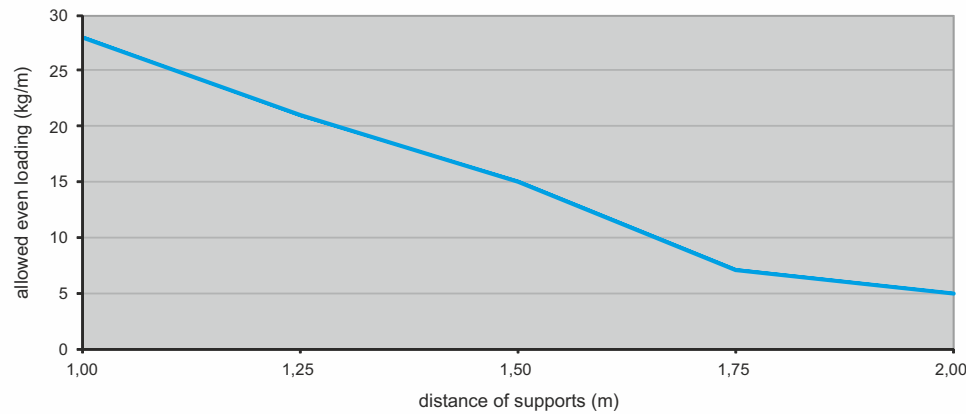

Inner usable cross-section of the channel

item number	cross-section cm ²	CYKY	CYKY	CYKY	CYKY	CYKY	CYKY	CYKY	CYKY
		3x1,5	5x1,5	3x2,5	5x2,5	3x4	5x4	5x6	5x10
NIXKZN 40X20	8	Ø8,6	Ø10,1	Ø9,5	Ø11,2	Ø11,2	Ø13,8	Ø15,1	Ø18
		5	4	4	3	3	2	2	1

The values state the number of cables with the tray at 50% full. Orientation diameters of the cables CYKY. The values are mathematically calculated. The limit values (small tray x big cable or contrariwise) it is necessary to consider combination of the tray and diameter of the cable and used them with reference to technical conditions.