

Use

Socket outlets for: Multistandard plugs.

Range

Designation

Item


Socket 2P+E 5/6/10/13 A 250 Va.c. and 127 Va.c. multistandard - 5 A and 13 A = BS std; 6 A = Indian std., 10 A = European std.

- RW4139
- RG4139

Color code:

- White colour
- Black colour

Overall dimensions (mm)

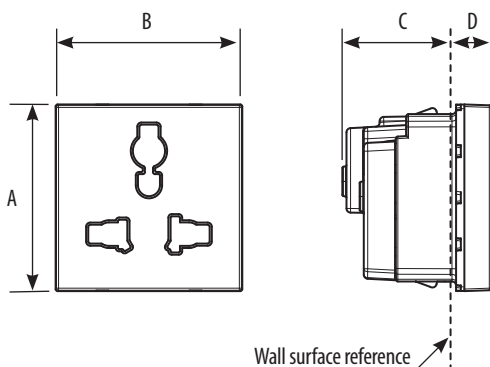

	A	B	C	D
..4139	45.1	45	26.1	9.8

Connection

Terminal type: screw clamp
Terminal capacity: 2 x 4 mm² max
Stripping length: 9 mm
Compatible with flexible or rigid cables

Technical characteristics

- Protection index
(considering a complete installation, including cover plate)
Penetration by solid bodies/liquid: IP20D

- Mechanical characteristics
Impact test: IK 04

- Material characteristics
Material:
Case and Key cover: PC (Polycarbonate)

Halogen free.

UV resistant.

Self-extinguishing:
850° C / 30 s for insulating parts holding live parts in place
650° C / 30 s for other parts made of insulating materials

- Electrical characteristics

Voltage: 127/250 VAC
Current: 5/6/10/13 A

- Climatic characteristics

Storage temperature: - 10° C to + 70° C
Use temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.
Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC 60884-1
AS/FAR/AS Applicable

Refer to e.catalogue.