

## EKV3+1 150 R VHBWUNH (VHBWUNH)

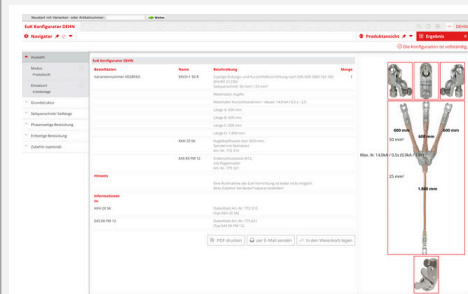


Figure without obligation

| Type  | EKV3+1 150 R VHBWUNH  |
|---|---|
| <b>Part No.</b>                                 | <b>VHBWUNH</b>  |
| Phase cable end                                 | KKH 25 SK   |
| Earth cable end                                 | EAS EK FM 12  |
| For fixed ball point Ø                          | 25 mm   |
| Cable cross-section Cu                          | 150/50 mm <sup>2</sup>  |
| Max. short-circuit current I <sub>k</sub> 0.5 s | 42.0 kA   |
| Max. short-circuit current I <sub>k</sub> 1 s   | 29.6 kA   |
| Standard  | EN/IEC 61138 (DIN VDE 0283-3) and EN/IEC 61230 (DIN VDE 0683-100) |
| Temperature range                               | -25 °C ... +55 °C   |
| Material (cable)                                | E-Cu, extra finely stranded and highly flexible                   |
| Material (sheath)                               | Thermoplastic (soft PVC compound YM2)                             |
| Weight  | 7,86 kg   |
| Customs tariff number                           | 85359000  |
| GTIN  | 4013364163645   |
| PU  | 1 Stk   |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.