



CorePro LED PLS 5W 830 2P G23

The Philips CorePro LED PLS integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplamping in general lighting applications: it meets basic lighting requirements, offers significant energy savings, and is environment-friendly.

Product data

General Information					
Cap-Base	G23 [G23]				
Nominal lifetime	30,000 hour(s)				
Switching Cycle	50,000				
Lighting Technology	LED				
Flux measurement reference	Sphere				
Light Technical					
Color Code	830 [CCT of 3000K]				
Beam Angle (Nom)	120 degree(s)				
Luminous Flux	520 lumen				
Color Designation	White (WH)				
Correlated Color Temperature (Nom)	3000 K				
Luminous Efficacy (rated) (Nom)	104.00 lm/W				
Color Consistency	<6				
Color rendering index (CRI)	82				
LLMF At End Of Nominal Lifetime (Nom	n) 70 %				
Operating and Electrical					
Line Frequency	50 to 60 Hz				
Input Frequency	50 to 60 Hz				
Power Consumption	5 W				
Starting Time (Nom)	0.5 s				


Warm-up time to 60% light	0.5 s				
Power Factor (Fraction)	0.9				
Voltage (Nom)	220-240 V				
Temperature					
Ambient temperature range	-20 °C to 45 °C				
T-Case Maximum (Nom)	83 ℃				
Controls and Dimming					
Dimmable	No				
Mechanical and Housing					
Bulb Material	Plastic				
Product Length	170 mm				
Bulb Shape	Tube, single-ended				
Approval and Application					
Energy Saving Product	Yes				
Approval Marks	TUV CE marking RoHS compliance KEMA Keur				
	certificate				
Energy Consumption kWh/1000 h	5 kWh				
EPREL Registration Number	403,566				
CE mark	Yes				

Datasheet, 2023, May 22 data subject to change

EU RoHS compliant	Yes
Product Data	
Full product code	871869959666800
Order product name	CorePro LED PLS 5W 830 2P G23
Order code	929001926302
Numerator - Quantity Per Pack	1


Numerator - Packs per outer box	20
Material number (12NC)	929001926302
Full product name	CorePro LED PLS 5W 830 2P G23
EAN/UPC - Case	8718699596675

Dimensional drawing





Product	D	D1	A1	A2	А3
CorePro LED PLS 5W 830 2P G23	31.1 mm	15.8 mm	108 mm	144 mm	166 mm

Photometric data












Light Distribution Diagram - CorePro LED PLS 5W 830 2P G23

Lifetime

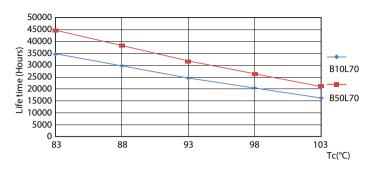





Life Expectancy Diagram - CorePro LED PLS 5W 830 2P G23

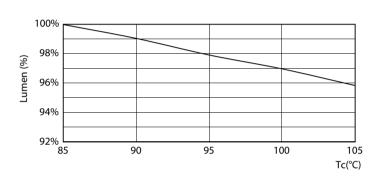


Life Expectancy Diagram - CorePro LED PLS 5W 830 2P G23



Lumen Maintenance Diagram - CorePro LED PLS 5W 830 2P G23



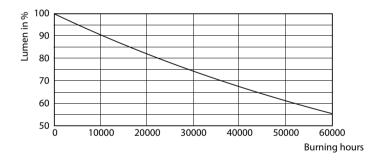

Lumen Maintenance Diagram - CorePro LED PLS 5W 830 2P G23



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.