

PHILIPS

MASTER LEDtube EM/ Mains T8

MAS LEDtube 1500mm HO 18.2W 830 T8

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance, which cannot be distinguished from traditional fluorescent. These T8 LED tubes are the right choice for absolute performance and are designed to stand up to everyday conditions. Unparalleled savings thanks to low energy consumption and an exceptionally long lifetime ensure this tube masters every demanding application.

Warnings and Safety

• NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.

Product data

General Information				
Cap-Base	G13 ROT (Rotating) [Medium Bi-Pin			
	Fluorescent]			
Nominal lifetime	75,000 hour(s)			
Switching Cycle	200,000			
Lighting Technology	LED			
Flux measurement reference	Sphere			
Light Technical				
Color Code	830 [CCT of 3000K]			
Beam Angle (Nom)	160 degree(s)			
Luminous Flux	2,900 lumen			
Color Designation	White (WH)			
Correlated Color Temperature (Nom)	3000 K			

Luminous Efficacy (rated) (Nom)	159 lm/W		
Color Consistency	<6		
Color rendering index (CRI)	80		
LLMF At End Of Nominal Lifetime (Nom) 70 %			
Operating and Electrical			
Line Frequency	50 to 60 Hz		
Input Frequency	50 to 60 Hz		
Power Consumption	18.2 W		
Starting Time (Nom)	0.5 s		
Warm-up time to 60% light	0.5 s		
Power Factor (Fraction)	0.9		
Voltage (Nom)	220-240 V		


Datasheet, 2023, May 22 data subject to change

MASTER LEDtube EM/Mains T8

Temperature					
Ambient temperature range	-20 °C to 45 °C				
T-Case Maximum (Nom)	55 ℃				
Controls and Dimming					
Dimmable	No				
Mechanical and Housing					
Bulb Finish	Frosted				
Bulb Material	Plastic				
Product Length	1,500 mm				
Bulb Shape	Tube, double-ended				
Approval and Application					
Energy Saving Product	Yes				
Approval Marks	RoHS compliance TUV CE marking KEMA Keur				
	cortificato				


Energy Consumption kWh/1000 h	19 kWh			
EPREL Registration Number	1,206,969			
CE mark	Yes			
EU RoHS compliant	Yes			
Product Data				
Full product code	871869959241700			
Order product name	MAS LEDtube 1500mm HO 18.2W 830 T8			
Order code	929001922902			
Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	10			
Material number (12NC)	929001922902			
Full product name	MAS LEDtube 1500mm HO 18.2W 830 T8			
EAN/UPC - Case	8718699592424			


Dimensional drawing

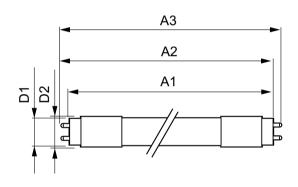

Product	D1	D2	A1	A2	А3
MAS LEDtube 1500mm HO 18.2W	25.8 mm	28 mm	1,498.8 mm	1,505.9 mm	1,513 mm
830 T8					

Photometric data




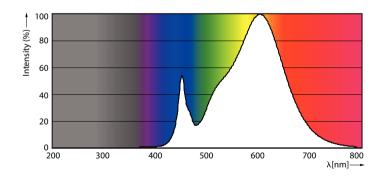

Spectral Power Distribution Colour - MAS LEDtube 1500mm HO 18.2W 830 T8


MASTER LEDtube EM/Mains T8


Photometric data




Light Distribution Diagram - MAS LEDtube 1500mm HO 18.2W 830 T8

Lifetime

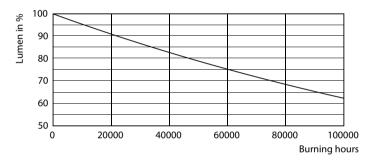




Lumen Maintenance Diagram - MAS LEDtube 1500mm HO 18.2W 830 T8

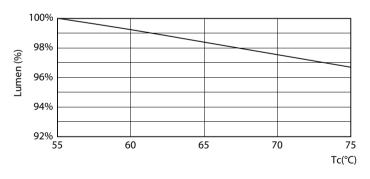

Life Expectancy Diagram - MAS LEDtube 1500mm HO 18.2W 830 T8

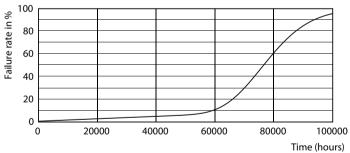


Lumen Maintenance Diagram - MAS LEDtube 1500mm HO 18.2W 830 T8

Life Expectancy Diagram - MAS LEDtube 1500mm HO 18.2W 830 T8

MASTER LEDtube EM/Mains T8

Lifetime

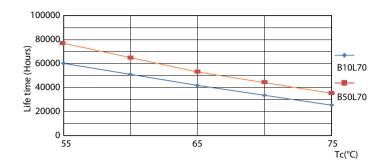

Life Expectancy Diagram - MAS LEDtube 1500mm HO 18.2W 830 T8



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.