

# FLORI LIGERO

SLI012017CW\_PW



See  
more

LED luminaire FLORI LIGERO, with a power of 6 W, high light efficacy 100 lm/W. It has a very high degree of protection IP65, providing protection against the ingress of dust and water jets. It shines with a cold light (6000K). Narrow beam angle 40° gives directional light so that selected surfaces can be better exposed.


IP65



Power	<b>6 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>600 lm (360°)</b>	Colour temperature	<b>6000 K</b>
Colour of light	<b>CW</b>	Beam angle	<b>40 °</b>
Degree of protection (IP)	<b>IP65</b>		

## Technical data

Code	SLI012017CW_PW
Power	6 W
Nominal current	45 mA
Voltage	230 V
Energy consumption	6 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0,5
Useful luminous flux*	600 lm (360°)
Luminous flux**	480 lm (360°)
Lamp efficacy	100 lm/W
Colour temperature	6000 K
Colour of light	CW
Beam angle	40 °
RA	80
Light source included	+
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Plastic
Degree of protection (IP)	IP65
Colour	Black
Dimension (AxBxC)	53x66x67mm + 145mm spike mm
For use	Inside/Outside
Assembly method	GRUNTOWY
Application	INT/EXT
Made in	PRC

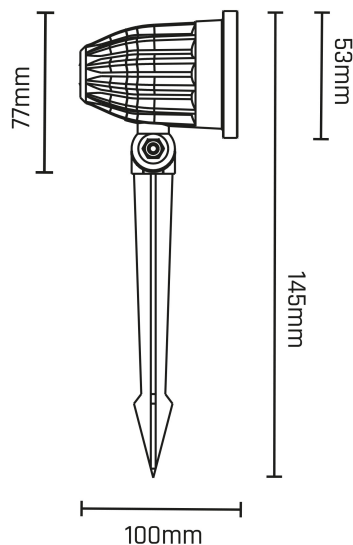

## Related documents

[User manual](#)[Declaration of Conformity](#)[Photometric file](#)

