

Hex shaped fiber heads with built-in lenses

E32-L





- Hex Shape mounting
- Signal strength 3 times higher
- 15° aperture angle

Hex Shape

Fiber Units with Build-in Lenses provide **more stable detection and simpler, more reliable installation.**

Hex-shaped models are now available with high-power built-in lenses for stable detection. Achieve stable detection and easy onsite application.

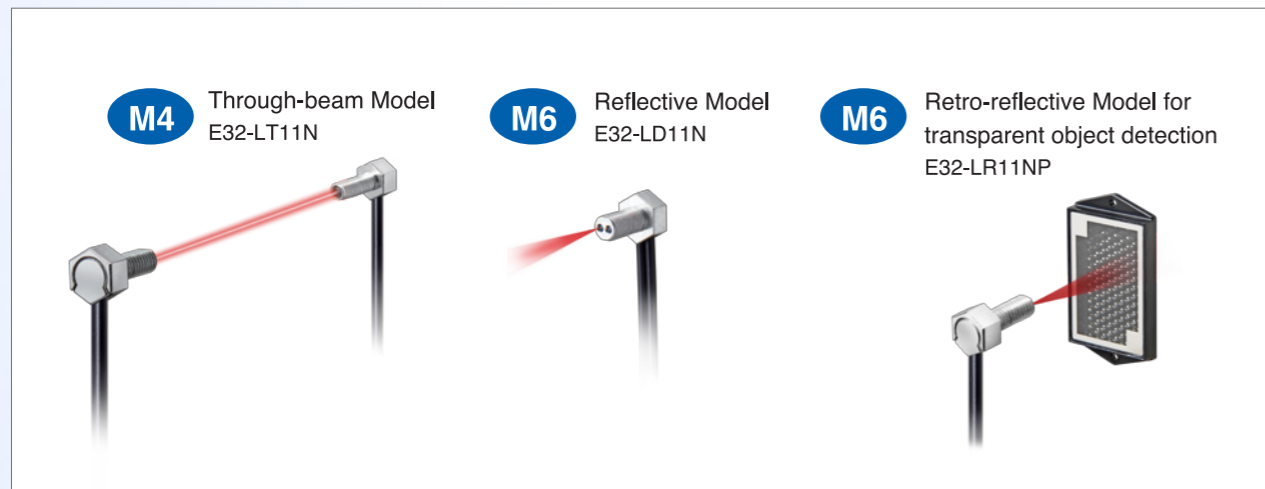

With conventional models, it was possible for the wrench to hit the cable and damage the optical fiber, preventing stable detection.



Tool-friendly Construction for Reliable Installation

Wrench Does Not Contact Cable

OMRON's original tool-friendly construction allows the wrench to fit all the way onto the nut without coming into contact with the cable. The Fiber Unit is not accidentally damaged.



Easy Cable Routing

The cable opening is wide, so the cable can be routed easily.

Hex shape Provides Simplicity and Reliability

Top-view Type...	Hex Shape!
It is possible to snag the cable.	Reduces problems with snagging.
Nuts must be tightened at two places.	Install the Unit simply by holding the head with a wrench, and tightening one nut.



Full lineup of Hex-shaped Units! (Models without Lenses)

M3 Coaxial Reflective Model E32-C21N

There are nine receiver fibers.*

Low-reflective objects or loose/inconsistently oriented objects can be detected more reliably.

* The conventional E32-C31N Fiber Unit has four receiver fibers.

A small spot lens can be attached.



M4 Diffuse-reflective Model E32-D21N

Improved Lineup

General-purpose M4 Hex-Shaped Models.




PAT.P

Build-in Lens

Stable Detection Due to High Power and Narrow Field of View


Long-term Stable Detection Even in Dusty Environments

The E32-LT11N's incident light level is approx. 10 times higher than that of the conventional Fiber Units.*1 High power means stable detection even in dusty and dirty environments. *1 OMRON Test Results.

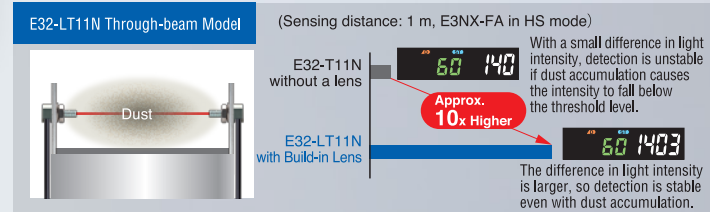


Stable Detection of Target Area Changes

The E32-LD11N's signal change (S/N ratio) is approx. 3 times higher than that of the conventional Fiber Units.*2 Because the target area is viewed with the narrow field of a 15° aperture angle, there is a greater difference in incident light levels and objects can be detected reliably. *2 OMRON Test Results.

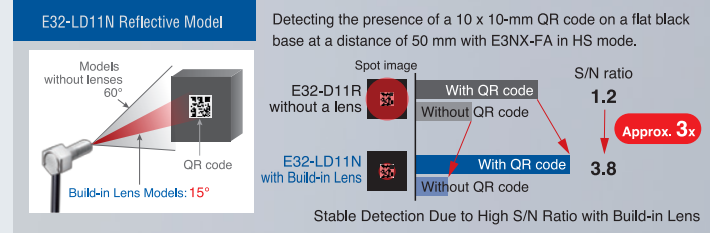

Reduce False Detection Caused by Scattered Light

False Detection is greatly reduced because the 15° aperture angle eliminates scattered light, even in tight spaces.

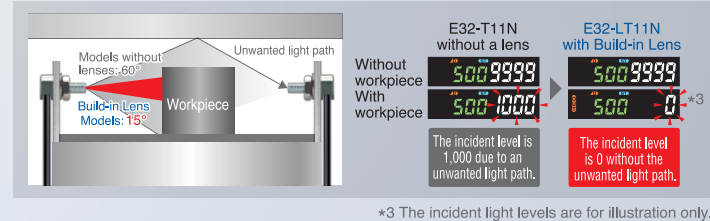

Build-in Lens Provides Simplicity and Reliability

If a Lens Is Attached ...	The Lens is Built-in!
It is possible for the lens to fall off and be lost.	The lens cannot fall off and be lost.
The torque must be checked during installation.	There is no need to check torque during installation.
The lens must be secured with tape or adhesive to prevent lens loss.	There is no need to secure the lens with tape or adhesive.

Reduce Maintenance Time

The lens protrudes a long way.

Short head requires little space.


Through-beam Fiber Units

Specifications

Size	Aperture angle	Appearance (mm)	Bending radius of cable (mm)	Sensing distance (mm)*1				Optical axis diameter (minimum sensing object) (mm)*3	Models				
				E3X-HD		E3NX-FA							
				GIGA	HS	Other modes	GIGA			HS	Other modes		
M4	Approx. 15°	Build-in Lens 14.4 M4	Flexible, R2	4,000*2	ST : 3,500	2,300	SHS: 920	4,000*2	ST : 4,000*2	3,450	SHS: 920	2.3 dia. (0.1 dia./0.03 dia.)	E32-LT11N 2M

Dimensions (mm) Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.

E32-LT11N 2M (Free Cutting)

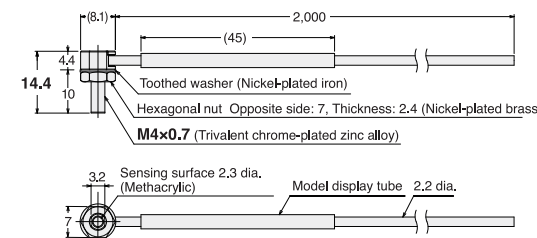


Reflective Fiber Units/ Retro-reflective Fiber Units

Specifications


Sensing method	Size	Aperture angle	Appearance (mm)	Bending radius of cable (mm)	Sensing distance (mm) *1,4				Optical axis diameter (minimum sensing object) (mm)*3	Models				
					E3X-HD		E3NX-FA							
					GIGA	HS	Other modes	GIGA			HS	Other modes		
Reflective	M3	Approx. 60°	Coaxial 18.5 M3	Flexible, R2	290	ST : 130	90	SHS: 39	440	ST : 190	130	SHS: 39	(5 μm dia./ 2 μm dia.)	E32-C21N 2M
	M4		13.5 M4		840	ST : 350	240	SHS: 100	1,260	ST : 520	360	SHS: 100		E32-D21N 2M
	M6		Build-in Lens 15.8 M6		840	ST : 350	240	SHS: 100	1,260	ST : 520	360	SHS: 100		E32-LD11N 2M
Retro-reflective for transparent object detection	M6	Approx. 15°	Build-in Lens 8.5, 44 M6	Flexible, R2	1,350	ST : 1,200	1,000	SHS: 550	2,020	ST : 1,800	1,500	SHS: 550	-	E32-LR11NP 2M + E39-RP1 (Optional reflector)

Dimensions (mm) Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.


E32-C21N 2M (Free Cutting)

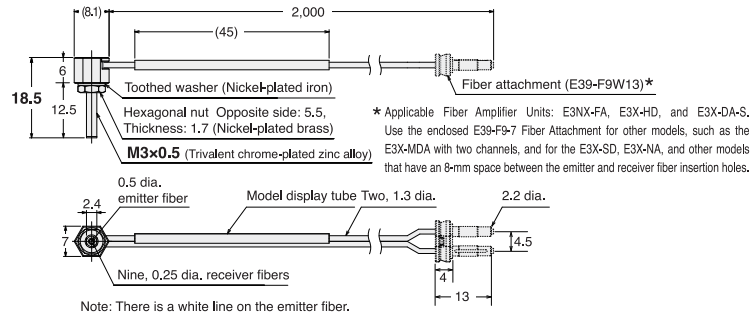


E32-LD11N 2M (Free Cutting)

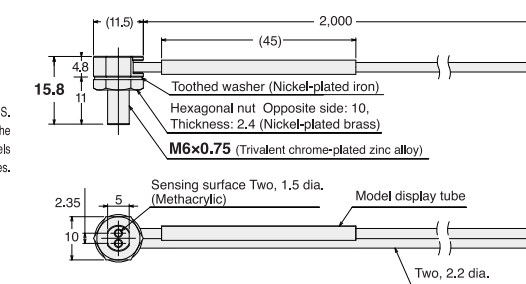

E32-D21N 2M (Free Cutting)

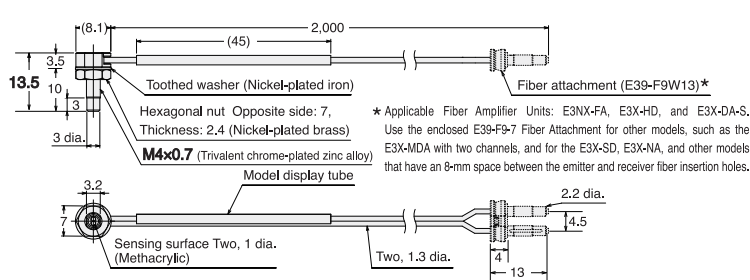

E32-LR11NP 2M (Free Cutting)

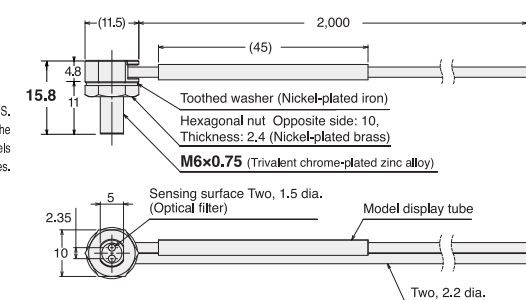

* 1. The following mode names and response times apply to the modes given in the Sensing distance column. E3X-HD GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs). E3NX-FA GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs).

* 2. The optical fiber is 2 m long on each side, so the sensing distance is 4,000 mm.

* 3. The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values. The first value is for the E3X-HD and the second value is for the E3NX-FA.

* 4. The sensing distances for Reflective Fiber Units are for white paper. The sensing distances for the E32-LD11N 2M are for glossy white paper. Note. Objects with a high reflection factor may cause the Retro-reflective Fiber Sensor to detect reflected light as incident light. Detection may be unstable depending on the type of transparent object. Check suitability beforehand.

Threaded
Cylindrical
Flat
Sleeved
Small Spot
High Power
Narrow view
BGS
Retro-reflective
Limited-reflective
Chemical-resistant, Oil-resistant
Bending
Heat-resistant
Area Detection
Liquid-level
Vacuum
FPD, Semi, Solar
Standard Installation
Saving Space
Beam Improvements
Transparent Objects
Environmental Immunity
Applications

Installation Information

Through-beam Fiber Units


Models	Installation			Cable						Weight (packed state) (g)
	Ambient temperature	Tightening torque	Mounting hole	Bending radius	Unbendable length	Tensile strength	Sheath material	Core material	Emitter/receiver differentiation	
E32-LT11N 2M	-40 to 70°C	0.78 N·m	4.2 $^{+0.5}_0$ dia.	R2	0	29.4 N	Polyethylene	Plastic	None	Approx. 40 g

Reflective Fiber Units/ Retro-reflective Fiber Units

Models	Installation			Cable						Weight (packed state) (g)
	Ambient temperature	Tightening torque	Mounting hole	Bending radius	Unbendable length	Tensile strength	Sheath material	Core material	Emitter/receiver differentiation	
E32-C21N 2M	-40 to 70°C	0.29 N·m	3.2 $^{+0.5}_0$ dia.	R2	0	9.8 N	Polyethylene	Plastic	White line on emitter cable	Approx. 30 g
E32-D21N 2M	-40 to 70°C	0.78 N·m	4.2 $^{+0.5}_0$ dia.		0	9.8 N	Polyethylene	Plastic	None	Approx. 30 g
E32-LD11N 2M	-40 to 70°C	0.98 N·m	6.2 $^{+0.5}_0$ dia.		0	29.4 N	Polyethylene	Plastic	None	Approx. 40 g
E32-LR11NP 2M	-40 to 70°C*	0.98 N·m	6.2 $^{+0.5}_0$ dia.		0	29.4 N	Polyethylene	Plastic	None	Approx. 40 g


* Ambient operating temperature of the recommended reflector (E39-RP1) is -40 to 60°C.

Accessories

Appearance	Models	Quantity	Remarks
	E39-F9W13	1	1.3-dia. Attachment Provided with applicable Fiber Units. Order this accessory separately if you lose or damage it.



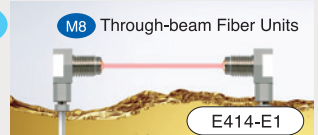
Applicable Fiber Units: E32-C21N, E32-D21N

Applicable Fiber Amplifier Units: E3NX-FA, E3X-HD, E3X-DA-S series

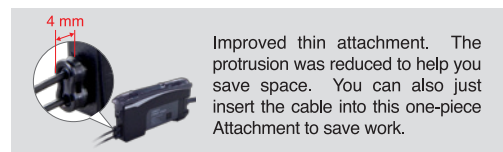

Improved thin attachment. The protrusion was reduced to help you save space. You can also just insert the cable into this one-piece Attachment to save work.

Related Fiber Units

Build-in Lens Series (Straight type) E32-LT / LD High Power and Aperture Angle of 15° GIGA Beam for Stable Detection 	Oil-resistant Series E32-T11NF The Ultimate Fiber Unit for an Oily Environment *Equivalent to IP68g of JIS C0920 Annex 1. 	Equivalent to IP68g* M8 Through-beam Fiber Units 
--	--	---

Introduction to Fiber Sensors

OMRON also provides many other types of Fiber Sensors.

Refer to Fiber Sensor Best Selection Catalog (E418).



Fiber Amplifier Units

		E3X-HD Series	E3NX-FA Series	
Fiber Amplifier Unit specifications	Output	1 output	1 or 2 outputs (depending on the model)	
	External input	Not supported	Supported or not supported (depending on the model)	
	Response time*	50 μs (55 μs)/250 μs/1 ms/16 ms (Default: 250 μs)	30 μs (32 μs)/250 μs/1 ms/16 ms (Default: 250 μs)	
	Sensing distance (Giga-power mode)	E32-LT11N	4,000 mm	4,000 mm
		E32-LD11N	840 mm	1,260 mm
Minimum sensing object	E32-LT11N	0.1 mm dia.	0.03 mm dia.	

* These are the response times for super-high-speed mode (SHS), high-speed mode (HS), standard mode (Stnd), and GIGA-power mode (GIGA). The value in parentheses for the super-high-speed mode is for a model with a PNP output.

OMRON Corporation Industrial Automation Company
Tokyo, JAPAN

Contact: www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.
Sensor Business Unit
Carl-Benz-Str. 4, D-71154 Nufringen, Germany
Tel: (49) 7032-811-0/Fax: (49) 7032-811-199

OMRON ELECTRONICS LLC
One Commerce Drive Schaumburg,
IL 60173-5302 U.S.A.
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

OMRON ASIA PACIFIC PTE. LTD.
No. 438A Alexandra Road # 05-05/08 (Lobby 2),
Alexandra Technopark,
Singapore 119967
Tel: (65) 6835-3011/Fax: (65) 6835-2711

OMRON (CHINA) CO., LTD.
Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

Authorized Distributor:

© OMRON Corporation 2013 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

Cat. No. E437-E1-02

Printed in Japan
1113(1013)