

SLI028027NW_PW_DALI


SLI028027NW_PW_DALI



Power	75 W	Voltage	230 V
Luminous flux*	13000 lm (360°)	Colour temperature	4000 K
Colour of light	Neutral white	Beam angle	120 °
IK	10	Degree of protection (IP)	IP65


Technical data

Code	SLI028027NW_PW_DALI
Power	75 W
Nominal current	332 mA
Voltage	230 V
Energy consumption	75 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power supply included	+
Power factor	0.99
Useful luminous flux*	13000 lm (360°)
Luminous flux**	11200 lm (360°)
Lamp efficacy	173 lm/W
Luminous intensity	3600 cd
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	120 °
RA	80
Uniformity of color SDCM max	3
Dimmable	DALI
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	POLYCARBONATE
IK	10
Degree of protection (IP)	IP65
Colour	Gray/White
Dimension (AxBxC)	1490x72x70 mm
For use	Inside/Outside
Assembly method	On the ceiling, Suspended
Application	INT/EXT
Made in	PRC
Other	MAX 10 pcs per line ,

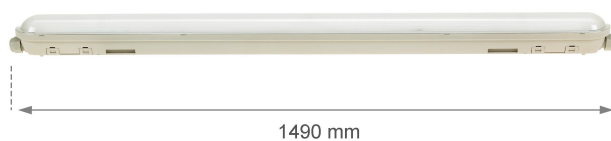

Related documents



 Photometric file

