



MASTER TL5 Circular

MASTER TL5 Circular 60W/830 1CT/10

This circular TL5 lamp (tube diameter 16 mm) offers extended design possibilities. The slim tube allows the creation of extremely flat luminaires and enables omnidirectional light distribution. It is suitable for a wide range of professional and semi-professional applications, and is ideal for use in shops, offices and public areas with unconventional layouts.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Lamp Current (Nom)	
Cap-Base	2GX13 [2GX13]	0.470 A	
Nominal lifetime	12,000 hour(s)	Controls and Dimming	
Flux measurement reference	Sphere	Dimmable	Yes
Light Technical		Mechanical and Housing	
Color Code	830 [CCT of 3000K]	Bulb Shape	C-T5 [C-T5 16 mm]
Luminous Flux	5,000 lumen	Approval and Application	
Color Designation	Warm White (WW)	Mercury (Hg) Content (Max)	4 mg
Chromaticity Coordinate X (Nom)	0.44	Mercury (Hg) Content (Nom)	4 mg
Chromaticity Coordinate Y (Nom)	0.403	Energy Consumption kWh/1000 h	61 kWh
Correlated Color Temperature (Nom)	3000 K	EPREL Registration Number	423,624
Luminous Efficacy (rated) (Nom)	83 lm/W	Product Data	
Color rendering index (CRI)	81	Full product code	871150064259225
Operating and Electrical		Order product name	MASTER TL5 Circular 60W/830 1CT/10
Power Consumption	60.6 W		

MASTER TL5 Circular

Order code	927966083013
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material number (12NC)	927966083013


Full product name	MASTER TL5 Circular 60W/830 1CT/10
EAN/UPC - Case	8711500642608

Dimensional drawing

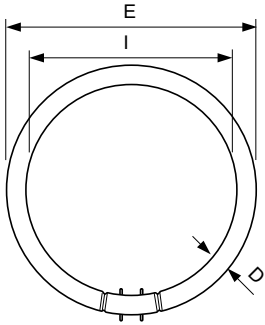



Product	D (max)	D (min)	E (min)	E (max)	I (min)	I (max)
MASTER TL5 Circular 60W/830 1CT/10	18 mm	14 mm	367 mm	379 mm	334 mm	346 mm

Photometric data



Spectral Power Distribution Colour - MASTER TL5 Circular 60W/830 1CT/10

Lifetime

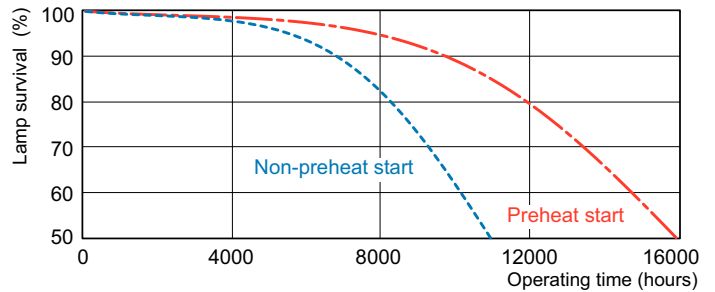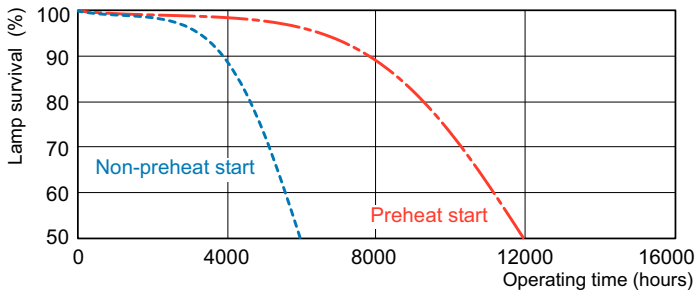


Life Expectancy Diagram - MASTER TL5 Circular 60W/830 1CT/10

Life Expectancy Diagram - MASTER TL5 Circular 60W/830 1CT/10

MASTER TL5 Circular

Lifetime

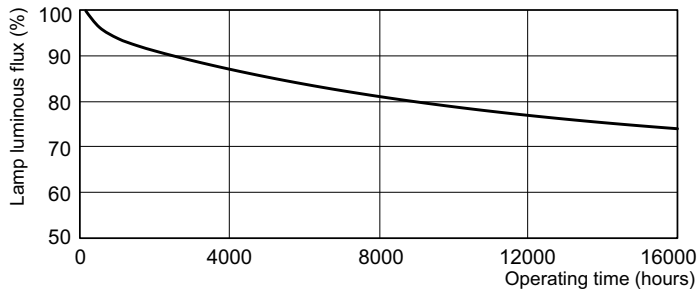

Lumen Maintenance Diagram - MASTER TL5 Circular 60W/830 1CT/10

