

# WLD+40003\_DALI

WLD+40003\_DALI




Power **10 W**  
Colour temperature **3000 K**  
Beam angle **24 °**

Voltage **48 V**  
Colour of light **WW**  
Degree of protection (IP) **IP20**

## Technical data

|                              |                |
|------------------------------|----------------|
| Code                         | WLD+40003_DALI |
| Power                        | 10 W           |
| Nominal current              | 200 mA         |
| Voltage                      | 48 V           |
| Energy consumption           | 10 kWh/1000h   |
| Frequency                    | DC Hz          |
| Protection class             | III            |
| Manufacturer of power supply | tuobo          |
| Power factor                 | 1              |
| Useful luminous flux*        | 950 lm (360°)  |
| Luminous flux**              | 700 lm (360°)  |
| Lamp efficacy                | 95 lm/W        |
| Luminous intensity           | 2700 cd        |
| Colour temperature           | 3000 K         |
| Colour of light              | WW             |
| Beam angle                   | 24 °           |
| RA                           | >90            |
| Light source included        | Yes            |
| Producer of LED diodes       | osram          |
| Uniformity of color SDCM max | 5              |
| Dimmable                     | DALI           |
| Working temperature range    | -20 to +40 °   |
| Lifespan                     | 50000 h        |
| Housing material             | AL+PC          |
| Degree of protection (IP)    | IP20           |
| Colour                       | White          |
| Dimension (AxBxC)            | 44x157x178 mm  |
| For use                      | Inside         |
| Assembly method              | NA SZYŃE       |
| Application                  | Inside         |
| Made in                      | PRC            |
| Other                        | DALI ,         |

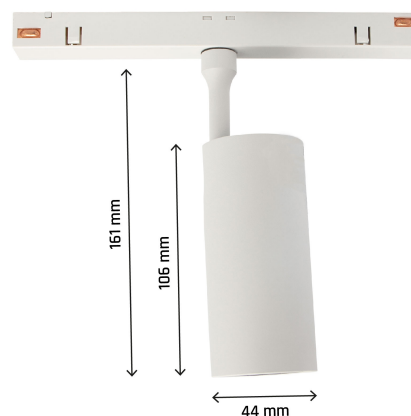

## Related documents



 Declaration of Conformity

