


Product Data Sheet

GW66676

IB Range

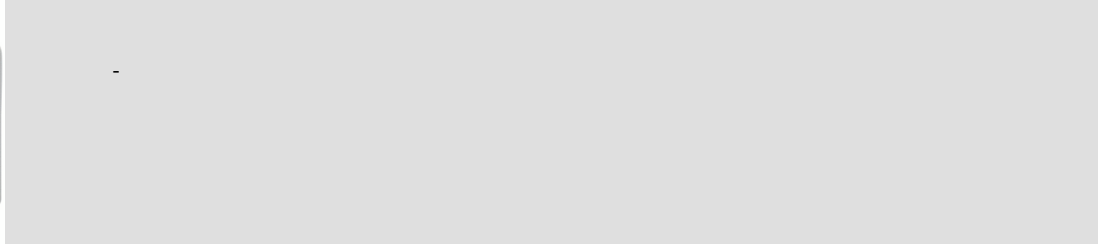

IP degree	IP44	Mechanical resistance	IK08
Houseable interloc. socket	1	Houseable IB socket-outlets	16/32 A
Side entries	4xØ 23	Top entries	3xØ 23
Bottom entries	3xØ 23	Glow Wire Test	650 °C
For socket-outlets	SBF horizontal	Electrocod	2220

TECHNICAL SYMBOLOGY

IP

IP44

IK

IK08

GWT

650 °C

STANDARDS/APPROVALS

**UK
CA** **CE**