


CENTRYXX IP65

672171.002.1.89 | Stand-by luminaires for escape route illumination



Ceiling luminaires
4051859157816
L 198, B 198, H 38

Ceiling mounting
white

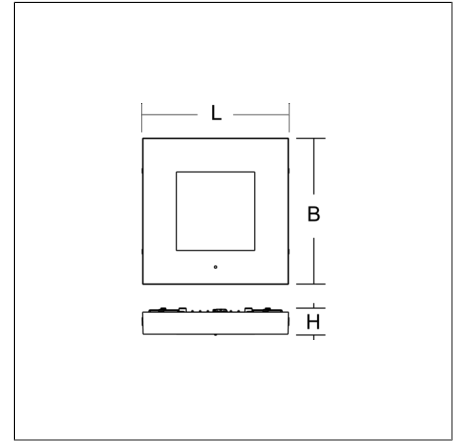

Flat, square surface-mounted luminaire. Base: die-cast aluminium, powder-coated Cover: polycarbonate. With plastic lenses for area lighting. Driver integrated. Suitable for connection to central battery systems. With AC Control monitoring module for LUXIFAIR central battery units. Luminaires with limited surface temperature in accordance with EN 60598-2-24 for use in environments in which a deposit of conductive dust on the luminaire can be expected. Ball impact proof in accordance with DIN 18032-3. Qualified for use in the food and drink industry.

Product specifications

Typ of emergency lighting	Central battery system
Monitoring	Luxifair AC-Control
Battery	without
Operating mode	maintained power mode
Length L	198 mm
Width B	198 mm
Height H	38 mm
Weight	0.8 kg
Light source	LED
Colour temperature	6500 K
Rated luminous flux, mains operation	490 lm
System power, mains operation	6,9 W
Rated luminous flux, emergency operation	490 lm
System power, emergency operation	6,6 W
System efficiency	71 lm/W
Glare evaluation UGR (4H 8H)	22,7
Beam angle	117°/118°
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 2
Driver	Electronic ballast
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 Hz, 60 Hz
Luminaires on B10A fuse	18
Luminaires on B16A fuse	29
Luminaires on C10A fuse	36
Luminaires on C16A fuse	58
Inrush current / Inrush current duration	3.3 A / 400 µs
CIE Flux Code / CEN Flux Code	51 94 100 100 100
Type of protection	IP 65
Protection class	I
Filament test	850 °C
Impact resistance	IK08
Ambient temperature for maintained power	-10 °C ... + 40 °C
Ambient temperature for non-maintained power mode	-10 °C ... + 40 °C
Safety marks	D-mark
Conformity mark	CE

CENTRYXX IP65

672171.002.1.89 | Stand-by luminaires for escape route illumination



Accessories



982257.002
Frame attachment



982274.002
Mounting set for through wiring surface installation



982341.002
Mounting kit for chains/cable suspensions



982424.002
Pendant tube set

Spareparts



985487
Address module AC-Control