


PRODUCT DATASHEET OT FIT 20/220...240/500 CS

OPTOTRONIC® FIT CS G3 | Constant Current - Indoor - on/off

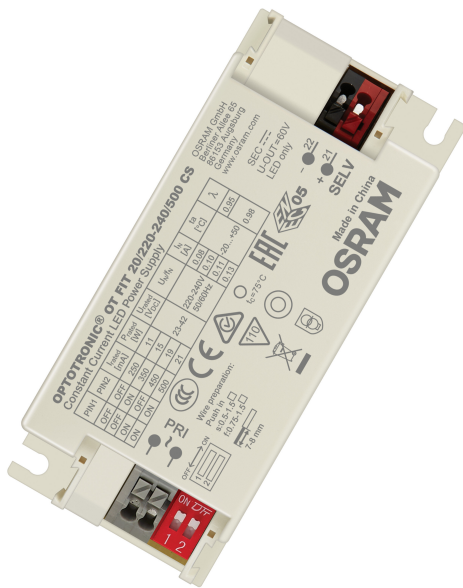

Areas of application

- Suitable for downlights, spotlights and LED panels
- Suitable for luminaires of protection classes I and II

Product benefits

- Higher quality of light thanks to low output ripple current
- High flexibility due to four different output currents
- Small housing for flexible luminaire designs
- High efficiency

Product features

- Lifetime: up to 50,000 h (temperature at max. t_c)
- Cable clamp kit for independent mounting

TECHNICAL DATA

Electrical data

Nominal wattage	20.00 W
Nominal output power	5.8...21 W
Nominal voltage	220...240 V
Nominal output voltage	23...42 V
Input voltage AC	198...264 V
U-OUT (working voltage)	60 V
Nominal current	0.13 A
Nominal output current	250 mA / 350 mA / 450 mA / 500 mA
Inrush current	≤ 4 A ¹⁾
Output current tolerance	+/- 6.5 %
Output ripple current (100 Hz)	< 5 %
Mains frequency	50/60 Hz
Total harmonic distortion	< 10 % ²⁾
Power factor λ	0.98
Device power loss	3,0 W ³⁾
Max. ECG no. on circuit breaker 10 A (B)	57
Max. ECG no. on circuit breaker 16 A (B)	91
Max. ECG no. on circuit breaker 25 A (B)	94
Surge capability (L/N-Ground)	2 kV
Surge capability (L-N)	1 kV
Galvanic isolation	SELV

1) $t_{width} = 70 \mu s$ (measured at 50 % I_{peak})


2) At full load, 230 V, 50 Hz / see graphs

3) At 230 V, Input power 24 W max.

Photometrical data

Flickering metric (Pst LM)	≤ 1
Stroboscope effect metric (SVM)	≤ 0.4

Dimensions & Weight



Length	97.00 mm
Mounting hole spacing, length	88,0 mm
Width	43.00 mm
Height	29.50 mm
Cable cross-section, input side	0.5...1.5 mm ²
Cable cross-section, output side	0.5...1.5 mm ²
Wire preparation length, input side	7...8 mm
Wire preparation length, output side	7...8 mm
Product weight	85.00 g

Colors & materials

Casing material	Plastic
Body material	Plastic

Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Maximum temperature at tc test point	75 °C
Max.housing temperature in case of fault	110 °C
Permitted rel. humidity during operation	5...85 % ¹⁾

¹⁾ Non-condensing

Lifespan

ECG lifetime	50000 h ¹⁾
--------------	-----------------------

¹⁾ At maximum $T_c = 75^\circ\text{C}$ / 10% failure rate

Capabilities

Dimmable	No
Overheating protection	Automatic reversible
Overload protection	Automatic reversible
No-load proof	Yes
Short-circuit protection	Automatic reversible
Max. cable length to lamp/LED module	2,0 m
Suitable for fixtures with prot. class	I / II
Type of connection, output side	Push terminal

Certificates & Standards






Approval marks – approval	CCC / CE / RCM / ENEC 05
---------------------------	--------------------------

Standards	Acc. to IEC 61347-1 / Acc. to IEC 61347-2-13 / Acc. to IEC 62384 / Acc. to CISPR 15 / Acc. to IEC 61000-3-2 / Acc. to IEC 61000-3-3 / Acc. to IEC 61547
Protection class	I,II
Type of protection	IP20

LOGISTICAL DATA

Temperature range at storage	-20...+80 °C
------------------------------	--------------

DOWNLOAD DATA

Documents and certificates	
	User instruction
	Declarations Of Conformity CE
	Declarations Of Conformity UKCA
	Certificates
CAD/BIM files	
	CAD_STEP_3D

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4052899617315	Unpacked 1			
4052899617773	Shipping box 20	228 mm x 208 mm x 78 mm	1903.00 g	3.70 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.