DATA SHEET

Valid from: 18.11.2019 AB-B8-M12-16-10,0PUR



Description

- Sensor/actuator box
- Connection methods: rapid interlock without LED master cable, markers and double-assigned slots
- slots: 8, cable length: 10 m





Number of slots: 8
Nominal voltage $U:_N$ 120 V
Max. current carrying capacity per path: 2 A
Total current: ± 12 A

Connection type: Individual wires

Current carrying capacity per slot: 4 A Number of poles: 5

Degree of protection: IP65/IP67

Ambient temperature: -25°C to +80°C(-13°F to +176°F)

Status display: no Inflammability class acc. to UL 94: V0

Contact surface material: Gold-plated Material, O-ring: NBR

Material of the moulding mass: PUR

Material of threaded sleeve: Zinc die-cast
Material of threaded sleeve surface: Nickel-plated
Tightening torque slot sensor/actuator 0.4 Nm

cable:

Tightening torque screw plug: 0.5 Nm

Conductor data

Cable types: Master cable suitable for flexible

cable conduit

Outer diameter: 10.5 mm

Conductor structure, voltage supply: 56x0.15 mm

Conductor structure, signal line: 28x0.15 mm

AWG power supply: 17

AWG signal line: 20

Power supply cross section: 3x1mm²

Signal line cross section: 16x0.5 mm²

Max. bending cycles: 1500000

Traversing path: 2 m

Traversing rate: 2 m/s

Creator: FELI1/PDP Document: DB22260017EN
Released: IVSE1/PDP Version: 05

22260017


DATA SHEET


Valid from: 18.11.2019

AB-B8-M12-16-10,0PUR




Technical drawing

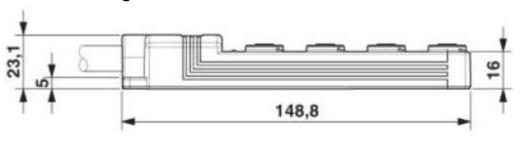

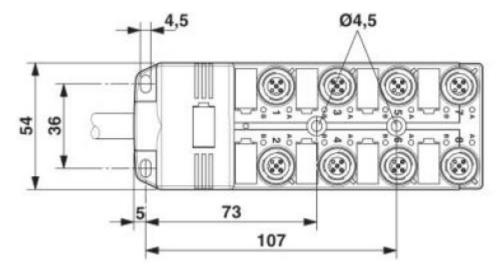

Circuit diagram

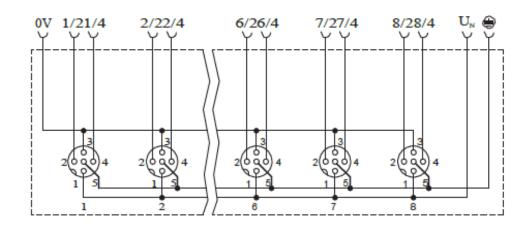

Creator: FELI1/PDP	Document: DB22260017EN	Page 2 of 3
Released: IVSE1/PDP	Version: 05	


22260017	DATA SHEET	
Valid from:	AD DO M12 14 10 ODIU	

AB-B8-M12-16-10,0PUR



Schema drawings

18.11.2019



Pin assignment

Slot/ position = Wire color or connection

1 / 4 (A) = WH1 / 2 (B) = GY/PK2 / 4 (A) = GN2 / 2 (B) = RD/BU3 / 4 (A) = YE3 / 2 (B) = WH/GN4 / 4 (A) = GY4 / 2 (B) = BN/GN5 / 4 (A) = PK5 / 2 (B) = WH/YE6 / 4 (A) = RD6 / 2 (B) = YE/BN7 / 4 (A) = BK 7 / 2 (B) = WH/GY8 / 4 (A) = VT8 / 2 (B) = GY/BN1-8 / 1 (+ 120 V) = BN 1-8 / 3 (0 V) = BU1-8 / 5 (PE) = GN/YE

Application range

Automation, industrial machinery and plant engineering

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: FELI1/PDP	Document: DB22260017EN	Page 3 of 3
Released: IVSE1/PDP	Version: 05	