




Ceiling and wall luminaires
4051859165552
L 230, B 106, H 76

Ceiling mounting, Wall (surface)
white

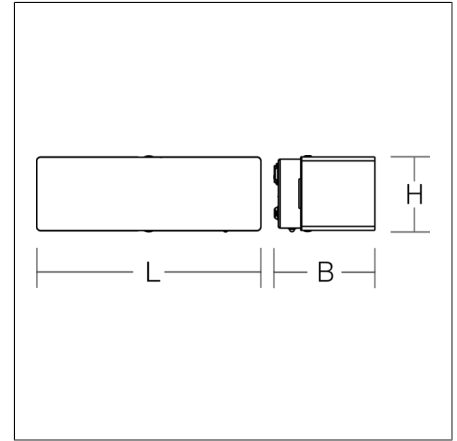

Luminaires for escape route identification Base: metal, powder-coated. Diffuser: plastic (polycarbonate), opal. 4 plastic foils with escape route motifs included (ISO 7010). Driver integrated. Suitable for connection to central battery systems.

Product specifications

Typ of emergency lighting	Central battery system
Monitoring	Power circuit
Battery	without
Operating mode	maintained power mode
Viewing Distance	14 m
Length L	230 mm
Width B	106 mm
Height H	76 mm
Weight	560 g
Light source	LED
Colour temperature	6500 K
System power, mains operation	3,8 W
System power, emergency operation	3,8 W
Colour rendering index (CRI)	70
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 0
Driver	Electronic ballast
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	17
Luminaires on B16A fuse	27
Luminaires on C10A fuse	28
Luminaires on C16A fuse	45
Inrush current / Inrush current duration	27 A / 250 µs
Type of protection	IP 40
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK03
Ambient temperature for maintained power	0 °C ... + 25 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Conformity mark	CE

Spareparts



08-64100
Replacement diffuser