


SLI021017WW_WW

SLI021017WW_WW

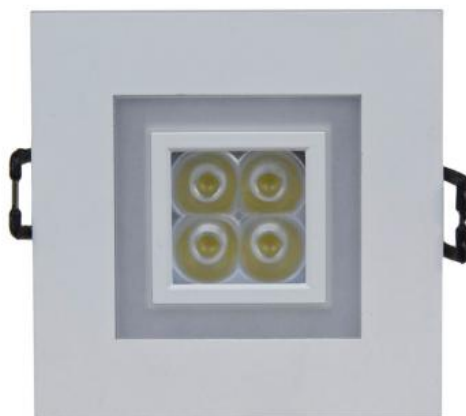

| | |
|--------------------|---------------|
| Power | 4 W |
| Colour temperature | 3000 K |
| Beam angle | 30 ° |


| | |
|---------------------------|--------------|
| Voltage | 230 V |
| Colour of light | WW |
| Degree of protection (IP) | IP20 |

Technical data

| | |
|------------------------------|----------------|
| Code | SLI021017WW_WW |
| Power | 4 W |
| Nominal current | 40 mA |
| Voltage | 230 V |
| Energy consumption | 4 kWh/1000h |
| Frequency | 50HZ Hz |
| Protection class | II |
| Power supply included | + |
| Luminous flux** | 450 lm (360°) |
| Lamp efficacy | 112 lm/W |
| Colour temperature | 3000 K |
| Colour of light | WW |
| Beam angle | 30 ° |
| RA | 80 |
| Uniformity of color SDCM max | 5 |
| Dimmable | No |
| Working temperature range | -20/+40 ° |
| Lifespan | 17000 h |
| Housing material | Aluminum |
| Degree of protection (IP) | IP20 |
| Colour | White |
| Dimension (AxBxC) | 80x80x40 mm |
| For use | Inside |
| Assembly method | Recessed |
| Application | INT |
| Made in | PRC |

Related documents



 Declaration of Conformity