

SLI022001CW

SLI022001CW



Power **7 W**

Colour temperature **6000 K**

Beam angle **90 °**


Voltage **230 V**

Colour of light **CW**

Degree of protection (IP) **IP20**


Technical data

| | |
|------------------------------|---------------|
| Code | SLI022001CW |
| Power | 7 W |
| Nominal current | 40 mA |
| Voltage | 230 V |
| Energy consumption | 7 kWh/1000h |
| Frequency | 50HZ Hz |
| Protection class | II |
| Power supply included | + |
| Luminous flux** | 560 lm (360°) |
| Lamp efficacy | 80 lm/W |
| Colour temperature | 6000 K |
| Colour of light | CW |
| Beam angle | 90 ° |
| RA | 80 |
| Uniformity of color SDCM max | 5 |
| Dimmable | No |
| Working temperature range | -20/+40 ° |
| Lifespan | 17000 h |
| Housing material | Aluminum |
| Degree of protection (IP) | IP20 |
| Colour | White |
| Dimension (AxBxC) | 114x69 mm |
| For use | Inside |
| Assembly method | Recessed |
| Application | INT |
| Made in | PRC |

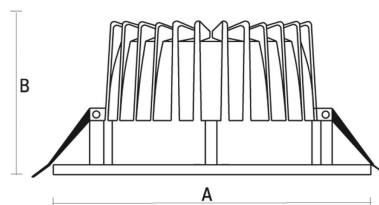

Related documents



 Declaration of Conformity



 Photometric file

