


DURE 3 MAX

SLI043014WW_PW



See
more

Downlight luminaire DURE 3 MAX, with a power of 18 W, high light efficacy 122 lm/W. It is made of high-quality components, supported by a 5-year warranty. It has a high IP44 rating, making it ideal for use in rooms with high humidity. It shines with a warm light (3000K), which promotes relaxation and rest, making the illuminated room cosier. Designed for recessed mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.

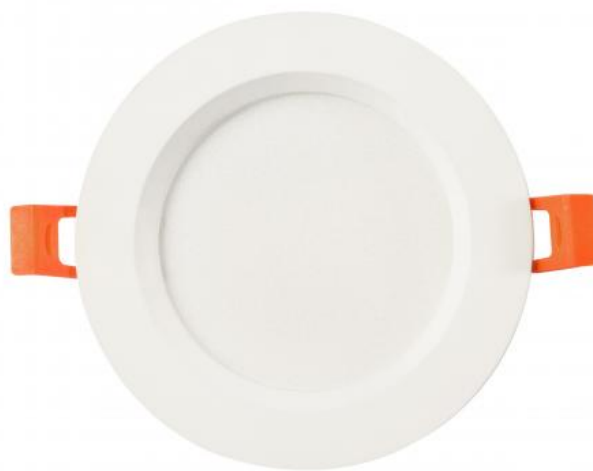

Power	18 W	Voltage	230 V
Luminous flux*	2200 lm (360°)	Colour temperature	3000 K
Colour of light	WW	Beam angle	110 °
IK	6	Degree of protection (IP)	IP44


Technical data

Code	SLI043014WW_PW
Power	18 W
Nominal current	94 mA
Voltage	230 V
Energy consumption	18 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0.8
Useful luminous flux*	2200 lm (360°)
Luminous flux**	1500 lm (360°)
Lamp efficacy	122 lm/W
Colour temperature	3000 K
Colour of light	WW
Beam angle	110 °
RA	80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	PA6+Aluminum
IK	6
Degree of protection (IP)	IP44
Colour	White
Dimension (AxBxC)	190x30 mm
Mounting hole	155 mm
For use	Inside
Assembly method	Recessed
Application	INT
Made in	PRC




Related documents



 User manual



 Declaration of Conformity



 Photometric file

