

WLD+40008_DALI


WLD+40008_DALI



Power	8 W	Voltage	48 V
Colour temperature	3000 K	Colour of light	WW
Beam angle	100 °	Degree of protection (IP)	IP20


Technical data


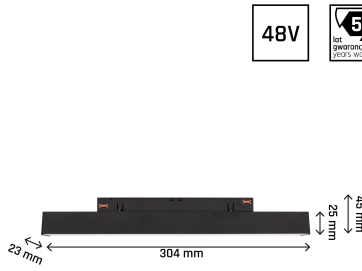
Code	WLD+40008_DALI
Power	8 W
Nominal current	170 mA
Voltage	48 V
Energy consumption	8 kWh/1000h
Frequency	DC Hz
Protection class	III
Manufacturer of power supply	tuobo
Power factor	1
Useful luminous flux*	980 lm (360°)
Luminous flux**	400 lm (360°)
Lamp efficacy	122 lm/W
Luminous intensity	135 cd
Colour temperature	3000 K
Colour of light	WW
Beam angle	100 °
RA	>90
Light source included	Yes
Producer of LED diodes	osram
Uniformity of color SDCM max	5
Dimmable	DALI
Working temperature range	-20 to +40 °
Lifespan	50000 h
Housing material	AL+PC
Degree of protection (IP)	IP20
Colour	Black
Dimension (AxBxC)	304x23x42 mm
For use	Inside
Assembly method	NA SZYŃE
Application	Inside
Made in	PRC
Other	DALI ,

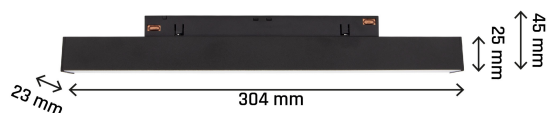

Related documents



 Declaration of Conformity

	 <p>48V </p> <p>49 mm 25 mm 304 mm 23 mm</p> <p>Montaż oprawy w obrebie szyny na „click” oraz możliwość swobodnego jej przesuwania</p>	 <p>48V </p> <p>49 mm 25 mm 304 mm 23 mm</p> <p>Montaż oprawy w obrebie szyny na „click” oraz możliwość swobodnego jej przesuwania</p>
	