

Product Environmental Profile

CVS400F TM400D 3P3D






General information

Representative product	CVS400F TM400D 3P3D - LV540306
Description of the product	The Easypact CVS400 to 630 range of circuit breakers with Thermal-Magnetic trip unit technology is designed to guarantee the protection of all low-voltage electrical applications between 400 A and 630 A.
Functional unit	The main function of the Easypact CVS product range is to trip and protect the wires and equipments in the circuit when over current is over -- 400A (Overload protection), -- or 2000A(4In)/4000A(10In) (Short circuit current protection) in accordance with the Standard: IEC60947.2 for period of 20 years



Constituent materials

Reference product mass	5094.5 g including the product, its packaging and additional elements and accessories
-------------------------------	---

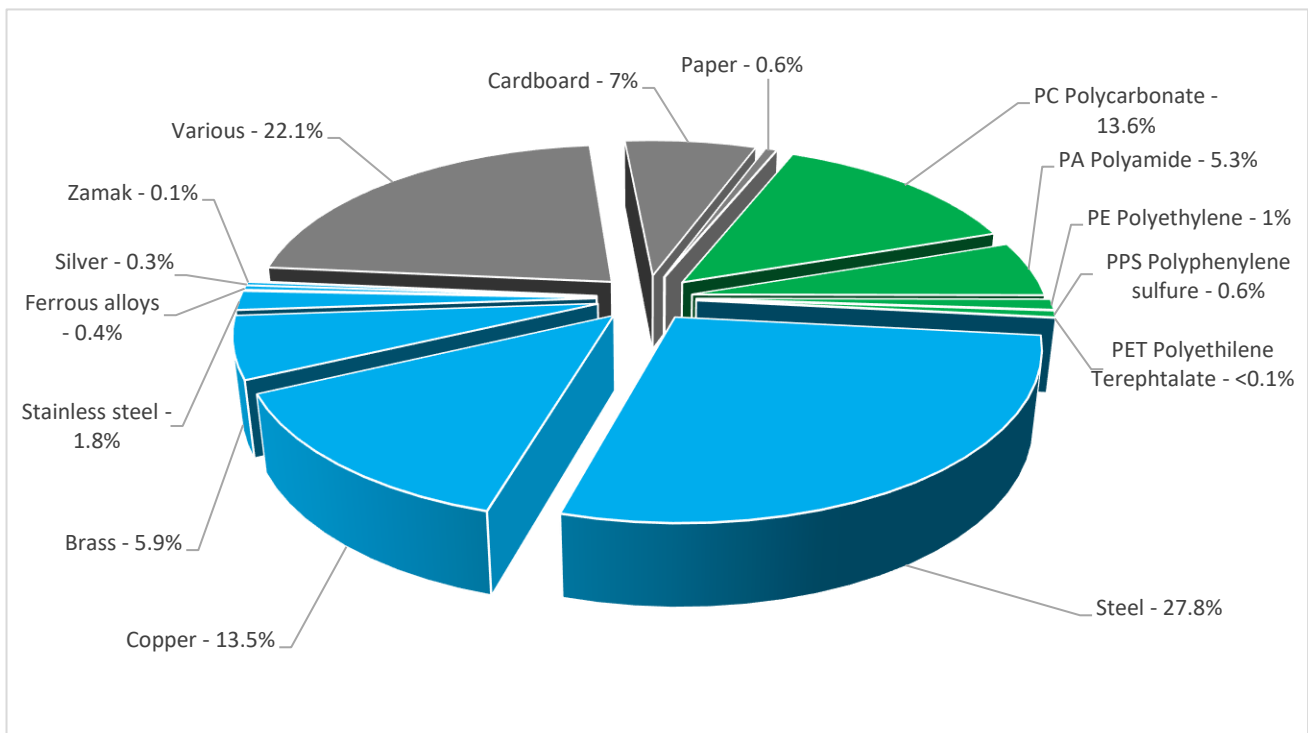

 Plastics	20.5%
 Metals	49.8%
 Others	29.7%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The CVS400F TM400D 3P3D presents the following relevant environmental aspects

Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 394.5 g, consisting of Cardboard (93.1%), PET film (0.4%), Paper (6.5%) Product distribution optimised by setting up local distribution centres
Installation	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains Plastic parts with brominated FR (3.77g) that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page Recyclability potential: 44% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).




Environmental impacts

Reference life time	20 years			
Product category	Circuit-breakers			
Installation elements	The product LV540306 does not require special installation procedure and requires little to no energy to install.			
Use scenario	Load rate: 50% of In Use time rate: 30% of RLT			
Geographical representativeness	China			
Technological representativeness	The Easypact CVS400 to 630 range of circuit breakers with Thermal-Magnetic trip unit technology is designed to guarantee the protection of all low-voltage electrical applications between 400 A and 630 A.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: China	Electricity mix; AC; consumption mix, at consumer; 220V; CN	Electricity mix; AC; consumption mix, at consumer; 220V; CN	Electricity mix; AC; consumption mix, at consumer; 220V; CN

Compulsory indicators

CVS400F TM400D 3P3D - LV540306

Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.54E-02	1.54E-02	0*	0*	5.28E-06	0*
Contribution to the soil and water acidification	kg SO ₂ eq	1.40E+00	9.09E-02	3.00E-03	0*	1.30E+00	1.42E-03
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	3.64E-01	1.85E-02	6.91E-04	0*	3.44E-01	3.98E-04
Contribution to global warming	kg CO ₂ eq	1.24E+03	3.48E+01	6.57E-01	0*	1.20E+03	7.56E-01
Contribution to ozone layer depletion	kg CFC11 eq	1.25E-05	2.85E-06	1.33E-09	0*	9.57E-06	3.26E-08
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	1.63E-01	9.02E-03	2.14E-04	0*	1.54E-01	1.48E-04
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	5.28E+00	3.94E+00	0*	0*	1.34E+00	6.47E-04
Total Primary Energy	MJ	2.02E+04	5.47E+02	9.29E+00	0*	1.97E+04	6.88E+00

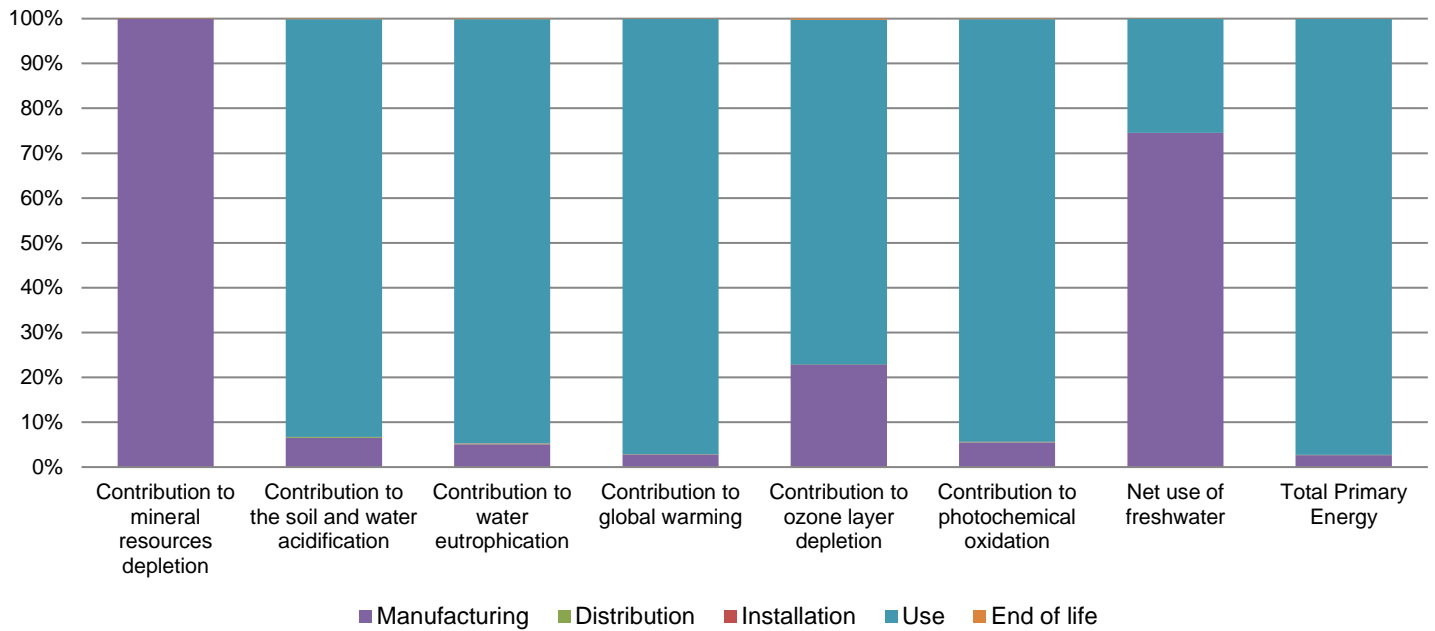

Optional indicators		CVS400F TM400D 3P3D - LV540306					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1.86E+04	3.59E+02	9.23E+00	0*	1.82E+04	5.53E+00
Contribution to air pollution	m³	1.34E+05	9.15E+03	2.80E+01	0*	1.25E+05	4.99E+01
Contribution to water pollution	m³	6.67E+04	6.75E+03	1.08E+02	0*	5.98E+04	6.02E+01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	6.15E-01	6.15E-01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.03E+03	2.16E+01	0*	0*	1.01E+03	0*
Total use of non-renewable primary energy resources	MJ	1.92E+04	5.26E+02	9.28E+00	0*	1.87E+04	6.88E+00
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.03E+03	2.12E+01	0*	0*	1.01E+03	0*
Use of renewable primary energy resources used as raw material	MJ	3.69E-01	3.69E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.92E+04	4.77E+02	9.28E+00	0*	1.87E+04	6.88E+00
Use of non renewable primary energy resources used as raw material	MJ	4.87E+01	4.87E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	2.96E+02	2.50E+02	0*	0*	3.88E+01	7.34E+00
Non hazardous waste disposed	kg	2.31E+02	1.31E+01	2.34E-02	0*	2.18E+02	0*
Radioactive waste disposed	kg	1.36E-02	6.37E-03	1.66E-05	0*	7.19E-03	3.34E-05
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	2.89E+00	4.65E-01	0*	3.88E-01	0*	2.04E+00
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1.04E-01	0*	0*	0*	0*	1.04E-01
Exported Energy	MJ	1.14E-03	1.05E-04	0*	1.04E-03	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.3, database version 2022-01 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1603002_V2	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	09/2022	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com

ENVPEP1603002_V2

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

09/2022