


PRODUCT-DETAILS

CK1-20

CK1-20 Short Circuit Signaling Contact

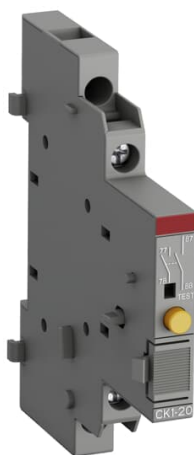

Algemene informatie

Type	CK1-20
Artikelnummer	1SAM301901R1002
EAN	4013614403934
Omschrijving	CK1-20 Short Circuit Signaling Contact
Omschrijving	<p>Signaling contacts CK1 with screw terminals signal the tripping of the manual motor starter in case it was caused by a short-circuit. For CK1 the indication on the device itself is done with a protruding orange button. The contact positions of CK1 need to be manually reset after a tripping event by pushing the orange button. They are attached on the right side of the manual motor starter MS116, MS132 or MS165. Signaling contacts CK1 are available as normally open or normally closed contacts.</p>

Ordering

Minimale bestelhoeveelheid	2 stuk
Nummer douanetarief	85365080

Popular Downloads

Gegevensblad, technische informatie	1SBC100214C0202
Instructies en handleidingen	2CDC131027M6802 2CDC131081M6801
Instructies en	1SBC100214C0202

handleidingen (deel 3)

CAD Dimensional
Drawing

2CDC001079B0201

Dimensions

Product netto breedte	9 mm
Product netto hoogte	90 mm
Product netto diepte	78 mm
Product netto gewicht	0.035 kg

Technical

Terminaltype	Schroef
Nominaal bedrijfsvoltage	690 V AC 600 V DC Main Circuit 690 V
Nominale bedrijfsstroom AC-15 (I_e))	(24 V) 6 A (240 V) 4 A (690 V) 1 A (380 / 400 V) 3 A
Nominale bedrijfsstroom DC-13 (I_e))	(24 V) 2 A (125 V) 0.55 A (250 V) 0.27 A (440 V) 0.15 A (600 V) 0.15 A
Nominale impuls grensvoltage (U_{imp})	Auxiliary Circuit 6 kV
Nominaal isolatievoltage (U_i)	690 V
Beschermingsgraad	IP20
Elektrische duurzaamheid	10000 cycle
Mechanische duurzaamheid	10000 cycle
Verbindingscapaciteit hulpcontact	Flexible with Ferrule 1/2x 0.75 ... 1.5 mm ² Flexible with Insulated Ferrule 1/2x 0.75 ... 1.5 mm ² Flexible 1/2x 0.75 ... 1.5 mm ² Rigid 1/2x 1 ... 1.5 mm ²
Aanhaalmoment	Auxiliary Circuit 0.8 ... 1.2 N·m
Kabelstriplengte	Auxiliary Circuit 8 mm
Aanbevolen schroevendraaier	M3 Pozidriv 2
Aantal hulpcontacten NO	2
Aantal hulpcontacten NC	0
Normen	CSA 22.2 No. 14 IEC/EN 60947-1 IEC/EN 60947-5-1 UL 508 UL 60947-1 UL 60947-5-1
Productnaam	Short Circuit Signaling Contact
Geschikt voor	MS132 MS165
Geschikt voor productklasse	Manual Motor Starter
Accessoiregroep	Electrical
Type Toebehoren	Short Circuit Signaling Contact

Technical UL/CSA

Maximale bedrijfsspanning UL/CSA	Main Circuit 600 V AC
Verbindingscapaciteit hulpcircuit UL/CSA	Flexible 1/2x 16-14 AWG Stranded 1/2x 16-14 AWG
Aanhaalmoment UL/CSA	Auxiliary Circuit 7 in-lb
Contactklasse UL/CSA	B600 Q600

Environmental

Omgevingsluchttemperatuur	Werking -25 ... +60 °C Opslag -50 ... +80 °C
Schokweerstand volgens IEC 60068-2-27	11 ms Pulse 25g
Weerstand tegen trillingen volgens IEC 60068-2-6	5g / 3 ... 150 Hz
RoHS-status	Following EU Directive 2011/65/EU and Amendment 2015/863 July 22, 2019

Certificates and Declarations

ABS-certificaat	1SAA963001-0101
BV-certificaat	1SAA963002-0201
CB-certificaat	1SAA963004-2002
CQC-certificaat	CQC2017010304032778
cUL-certificaat	cUL_E137861
Declaration of Conformity - CCC	2020980304001252
Conformiteitsverklaring - CE	1SAD101100-3410
Declaration of Conformity - UKCA	1SAD201100-3410
DNV GL-certificaat	1SAA963001-0304
LR-certificaat	1SAA963001-0502 1SAA918001-0501
RINA-certificaat	1SAA963002-0802
UL-certificaat	UL_E137861

Container Information

Pakketniveau 1 Breedte	25 mm
Pakketniveau 1 Lengte	80 mm
Pakketniveau 1 Hoogte	93 mm
Pakketniveau 1 Bruto gewicht	0.08 kg
Pakketniveau 1 EAN	4013614481536
Pakketniveau 1 Units	2 stuk
Pakketniveau 2 Breedte	280 mm
Pakketniveau 2 Lengte	395 mm
Pakketniveau 2 Hoogte	210 mm
Pakketniveau 2 EAN	4013614526022
Pakketniveau 2 Units	160 stuk

Classifications

Object classificatiecode	Q
--------------------------	---

ETIM 4	EC002498 - Accessories for low-voltage switch technology
ETIM 5	EC000041 - Auxiliary contact block
ETIM 6	EC000041 - Hulpcontactblok
ETIM 7	EC000041 - Auxiliary contact block
ETIM 8	EC000041 - Hulpcontactblok
eClass	V11.0 : 27371302
UNSPSC	39121522
IGCC (IDEA granulaire categoriecode)	4743 >> Auxiliary contact block
E-Number (Finland)	3706161
E-Number (Sweden)	3110146

Categorieën

Laagspanningsproducten en -systemen → Control Producten → Handmatige motorstarters → Handmatige motorstarters toebehoren

