



# MASTER TL-D Super 80

# MASTER TL-D Super 80 30W/830 1SL/25

The MASTER TL-D Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

# **Warnings and Safety**

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### **Product data**

General Information				
Cap-Base	G13 [Medium Bi-Pin Fluorescent]			
Flux measurement reference	Sphere			
Light Technical				
Color Code	830 [CCT of 3000K]			
Luminous Flux	2,400 lumen			
Color Designation	Warm White (WW)			
Chromaticity Coordinate X (Nom)	0.44			
Chromaticity Coordinate Y (Nom)	0.403			
Correlated Color Temperature (Nom)	3000 K			
Luminous Efficacy (rated) (Nom)	80 lm/W			
Color rendering index (CRI)	82			
Operating and Electrical				
Power Consumption	30.2 W			

Lamp Current (Nom)	0.360 A				
Controls and Dimming					
Dimmable	Yes				
Mechanical and Housing					
Bulb Shape	T8 [26 mm (T8)]				
Approval and Application					
Mercury (Hg) Content (Nom)	1.7 mg				
Energy Consumption kWh/1000 h	31 kWh				
EPREL Registration Number	423,372				
Product Data					
Full product code	871150063183140				
Order product name	MASTER TL-D Super 80 30W/830 1SL/25				
Order code	927920583023				


Datasheet, 2023, May 16 data subject to change

# **MASTER TL-D Super 80**

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material number (12NC)	927920583023
Full product name	MASTER TL-D Super 80 30W/830 1SL/25


EAN/UPC - Case	8711500631848

# Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm
30W/830 1SL/25					


# Photometric data



Spectral Power Distribution Colour - MASTER TL-D Super 80 30W/830 1SL/25

### Lifetime

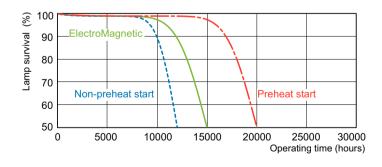

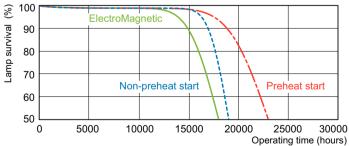


Life Expectancy Diagram - MASTER TL-D Super 80 30W/830 1SL/25

Life Expectancy Diagram - MASTER TL-D Super 80 30W/830 1SL/25

# **MASTER TL-D Super 80**

# Lifetime

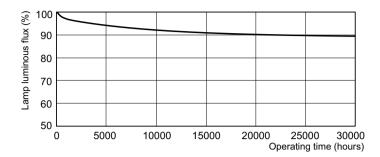

Lumen Maintenance Diagram - MASTER TL-D Super 80 30W/830 1SL/25



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.