



CoreLine Panel G6

RC132V G6 43S/840 PSU W60L60 OC BN

CoreLine Panel G6, 31 W, 600x600 mm, VPC, 4300 lm, 4000 K

Philips CoreLine panel Gen6 delivers on the CoreLine promise of innovation, easy installation, and excellent illumination. Designed as a direct replacement for functional luminaires in general lighting applications, this LED panel light's innovative All-in feature offers a choice of three lumen packages and three-color temperatures in a single luminaire. This makes it easy to select the right product, gives you the flexibility respond to customer preferences on site, and means fewer product codes on stock. Installing the CoreLine RC132V LED panel is quick and easy, using the product's quick connector or flywire. The CoreLine range includes Interact Ready luminaires with integrated wireless communications, ready to be used with Interact gateways, sensors, and software.

Product data

General Information		Optic type	
Number of gear units	1 unit	Luminaire light beam spread	Beam angle 90°
Driver included	Yes	Unified glare rating CEN	90°
Value ladder	Performance		19
Light Technical		Operating and Electrical	
Luminous Flux	4,300 lm	Input Voltage	220 to 240 V
Luminous Efficacy (rated) (Nom)	139 lm/W	Line Frequency	50 or 60 Hz
Correlated Color Temperature (Nom)	4000 K	Inrush current	20 A
Color rendering index (CRI)	>80	Inrush time	0.22 ms
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1	Power Consumption	31 W
Stroboscopic effect visibility measure (SVM)	0.4	Power Factor (Fraction)	0.9
Beam angle of light source	90 degree(s)	Connection	Flying leads/wires
Light source color	840 neutral white	Cable	2×0.75mm ²
		Number of products on MCB of 16 A type B	21

CoreLine Panel G6

Temperature	
Ambient temperature range	-10 to +35 °C
Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit external (On/Off)
Control interface	-
Constant light output	No
Mechanical and Housing	
Housing Material	Steel
Reflector material	Acrylate
Optic material	Polystyrene
Optical cover material	Polystyrene
Fixation material	-
Housing Color	White RAL 9003
Optical cover finish	Diamond
Overall length	595 mm
Overall width	595 mm
Overall height	61 mm
Dimensions (Height x Width x Depth)	61 x 595 x 595 mm
Compatible ceiling or ceiling installation accessory type	Visible profile ceiling version
Approval and Application	
Ingress protection code	IP20/40 [Finger-protected;Wire-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Sustainability rating	-
Protection class IEC	Safety class II
Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	CE mark
ENEC mark	ENEC mark
Warranty period	5 years
Photobiological risk	Photobiological risk group 0 @200mm to EN62778

Photobiological risk specification	0.2 m
EU RoHS compliant	Yes


Initial Performance (IEC Compliant)	
Luminous flux tolerance	-10% / +10%
Initial chromaticity	(0.38, 0.38) SDCM ≤3
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L85
Lumen maintenance at median useful life* 100000 h	L75

Application Conditions	
Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable
Suitable for random switching	Not applicable

Product Data	
Order product name	RC132V G6 43S/840 PSU W60L60 OC BN
Full product name	RC132V G6 43S/840 PSU W60L60 OC BN
Full product code	872016975127999
Order code	911401806987
Material Nr. (12NC)	911401806987
Numerator - Quantity Per Pack	1
Net Weight (Piece)	2.100 kg
EAN/UPC - Product/Case	8720169751279
Numerator - Packs per outer box	4
EAN/UPC - Case	8720169751354

Dimensional drawing

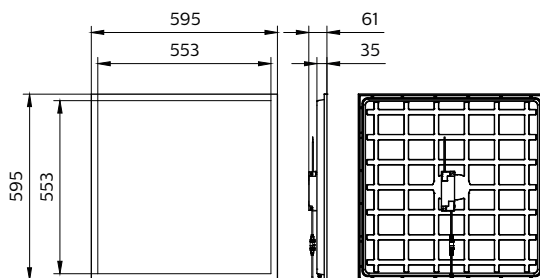

CoreLine Panel G6

