

MASTER LEDtube Mains T5



MAS LEDtube 600mm HO 10.5W 865 T5

The new Philips Master LEDtube Mains T5 brings simplicity to your lighting project. You don't need to pay attention to the driver technology anymore. Thanks to a unique design, Philips MASTER LEDtube Mains T5 installs in luminaires operating on mains power connection. So simple to operate! . Perfectly safe, reliable & easy to install Philips MASTER LEDtube Mains T5 is the ideal alternative to standard fluorescent tubes to maximize value over lifetime with high energy saving and lower maintenance costs.

Product data

General Information				
Cap-Base	G5 [G5]			
Nominal lifetime	50,000 hour(s)			
Switching Cycle	200,000			
Lighting Technology	LED			
Flux measurement reference	Sphere			
CE mark	Yes			
EU RoHS compliant	Yes			
Light Technical				
Color Code	865 [CCT of 6500K]			
Beam Angle (Nom)	200 degree(s)			
Luminous Flux	1,600 lumen			
Color Designation	Cool Daylight			
Correlated Color Temperature (Nom)	6500 K			
Luminous Efficacy (rated) (Nom)	152 lm/W			
Color Consistency	<6			
Color rendering index (CRI)	80			

LLMF At End Of Nominal Lifetime (Nom)	70 %		
Flickering value (PstLM)	1		
Stroboscopic effect value (SVM)	0.4		
Photobiological safety according to EN 62471 RG0			
Operating and Electrical			
Input Frequency	50 to 60 Hz		
Power Consumption	10.5 W		
Lamp Current (Nom)	47 mA		
Wattage Equivalent	24 W		
Starting Time (Nom)	0.5 s		
Warm-up time to 60% light	0.5 s		
Power Factor (Fraction)	0.92		
Voltage (Nom)	220-240 V		
LED alternative to fluorescent lamp power	24 W		
Temperature			
Ambient temperature range	-20 to +45 ℃		


Datasheet, 2023, October 10 data subject to change

MASTER LEDtube Mains T5

T-Case Maximum (Nom)	60 ℃			
Controls and Dimming				
Dimmable	No			
Mechanical and Housing				
Bulb Finish	Frosted			
Bulb Material	Glass			
Product Length	600 mm			
Bulb Shape	Tube, double-ended			
Approval and Application				
Energy Efficiency Class	D			
Energy Saving Product	Yes			
Approval Marks	RoHS compliance TUV CE marking KEMA			
	Keur certificate			


Energy Consumption kWh/1000 h	11 kWh			
EPREL Registration Number	1590873			
Product Data				
Full product code	872016927523200			
Order product name	MAS LEDtube 600mm HO 10.5W 865 T5			
Order code	929003734502			
Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	10			
Material Nr. (12NC)	929003734502			
Full product name	MAS LEDtube 600mm HO 10.5W 865 T5			
EAN/UPC - Case	8720169275249			
EAN/UPC - Product/Case	8720169275232			

Dimensional drawing




Product	D1	D2	A1	A2	А3
MAS LEDtube 600mm HO 10.5W 865 T5		19 mm	549 mm	556.1 mm	563.2 mm

Photometric data




Light Distribution Diagram - MAS LEDtube 600mm HO 10.5W 865 T5

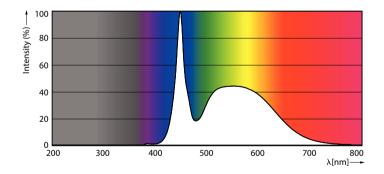

Spectral Power Distribution Colour - MAS LEDtube 600mm HO 10.5W 865 T5

MASTER LEDtube Mains T5


Photometric data




Calculus Presumentor 45 Philips Lighting B.V. Pages 19

General uniform lighting - MAS LEDtube 600mm HO 10.5W 865 T5

Lifetime

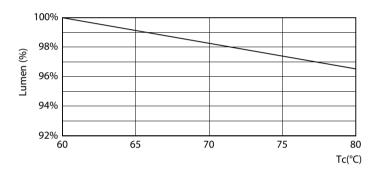



Lumen Maintenance Diagram - MAS LEDtube 600mm HO 10.5W 865 T5


Life Expectancy Diagram - MAS LEDtube 600mm HO 10.5W 865 T5

Life Expectancy Diagram - MAS LEDtube 600mm HO 10.5W 865 T5

Life Expectancy Diagram - MAS LEDtube 600mm HO 10.5W 865 T5

MASTER LEDtube Mains T5

Lifetime

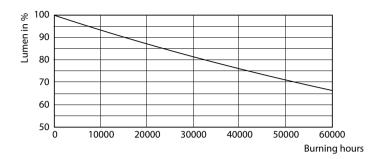

Lumen Maintenance Diagram - MAS LEDtube 600mm HO 10.5W 865 T5



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. All trademarks are owned by Signify Holding or their respective owners.