

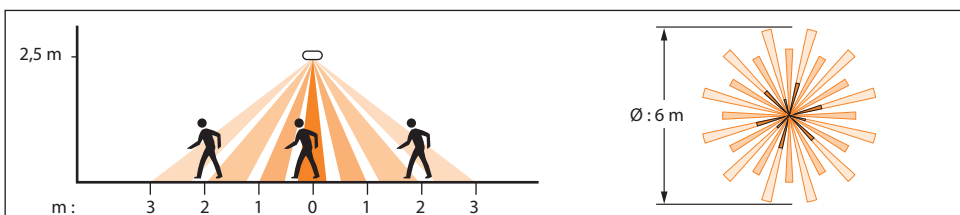
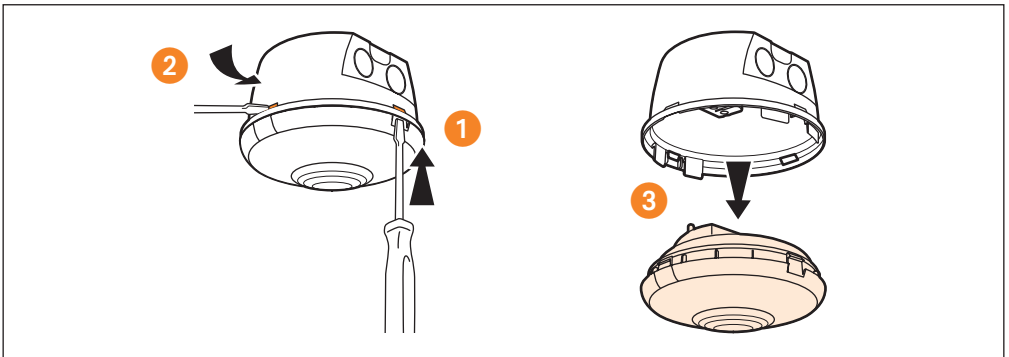
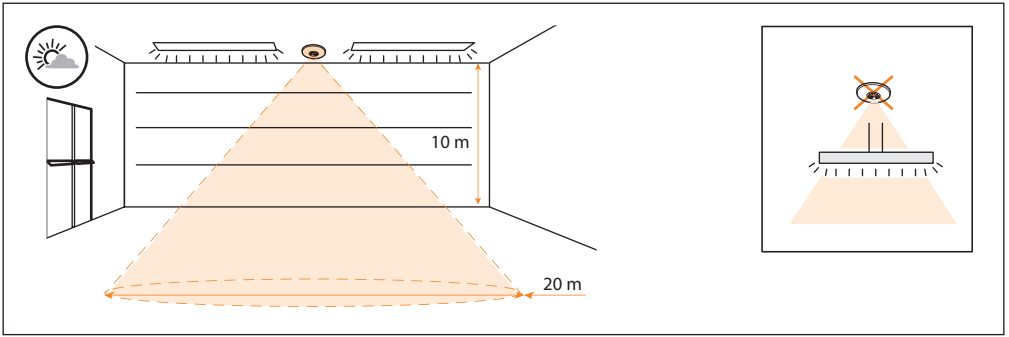



	100 V~ - 240 V~
	50 / 60 Hz
	2 x 2,5 mm ²
	-5°C / +45°C
	PIR
	300 lux
	15 min.
	m 2,5 Ø 6 10 Ø 20

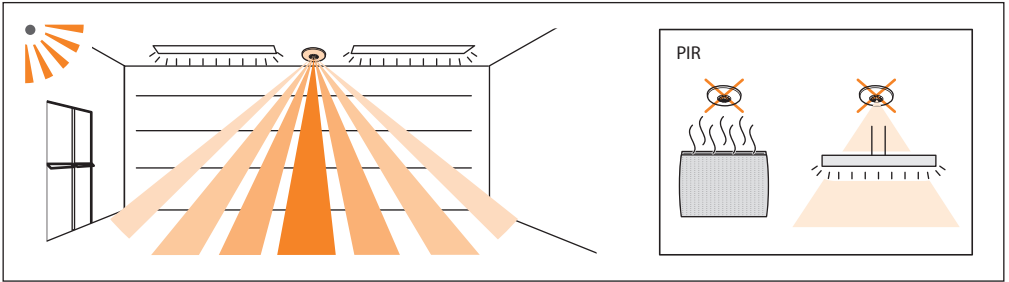


230 V~	2000 W	8,5 A	1000 VA	4,3 A	1000 VA	4,3 A	10x(2x36 W)	4,3 A
110 V~	1000 W		500 VA		500 VA		5x(2x36 W)	




230 V~	250 W	1 A	250 W	1 A	250 W	1 A	500 VA	2,1 A
110 V~	125 W		125 W		125 W		250 VA	

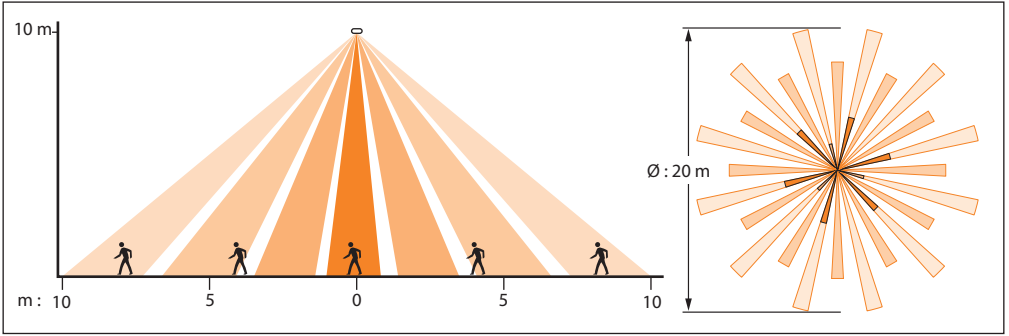

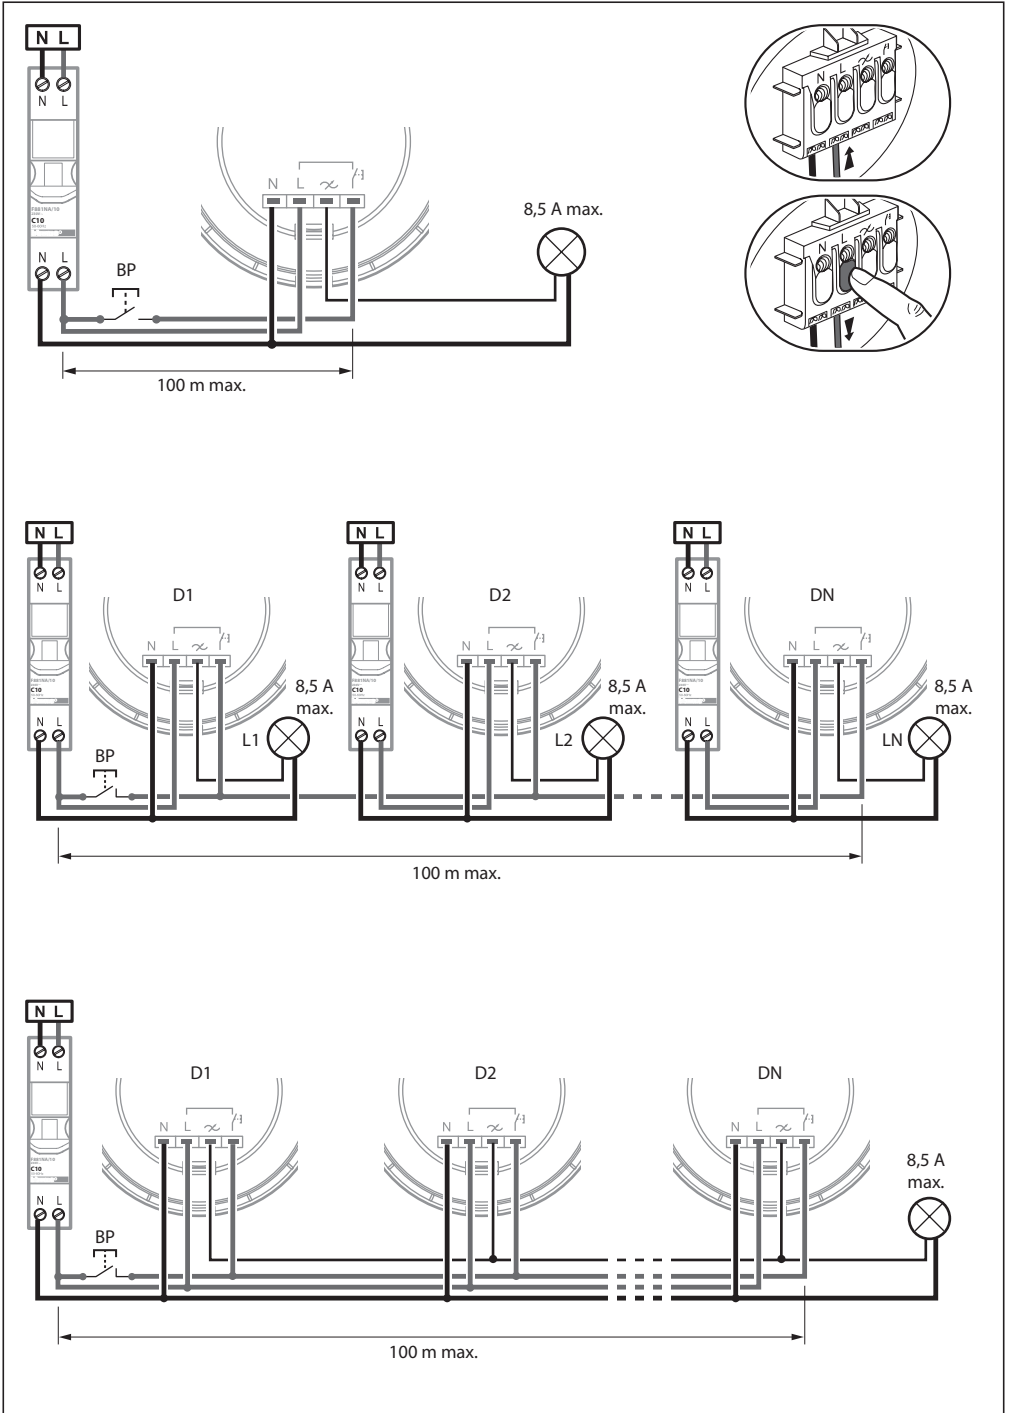







-  IP 55
-  X 2
-  X 2

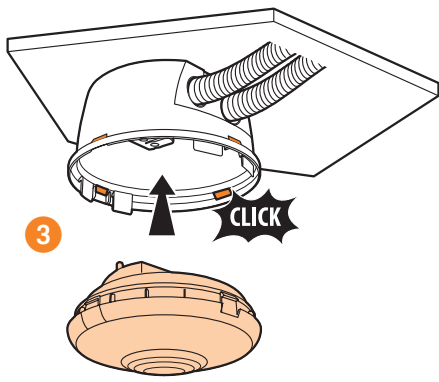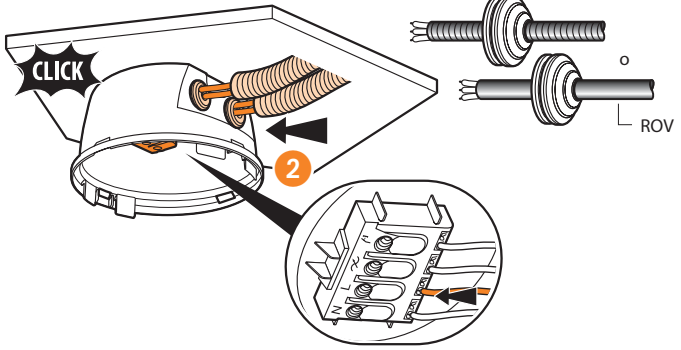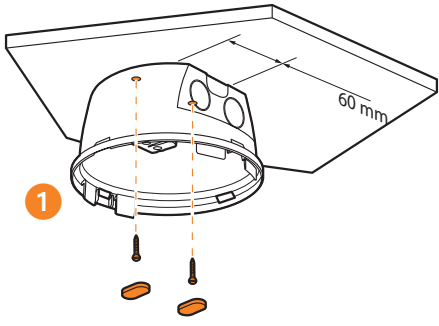







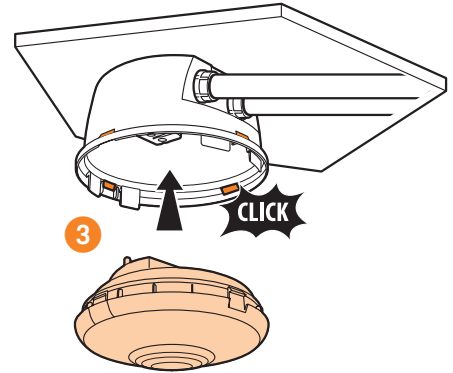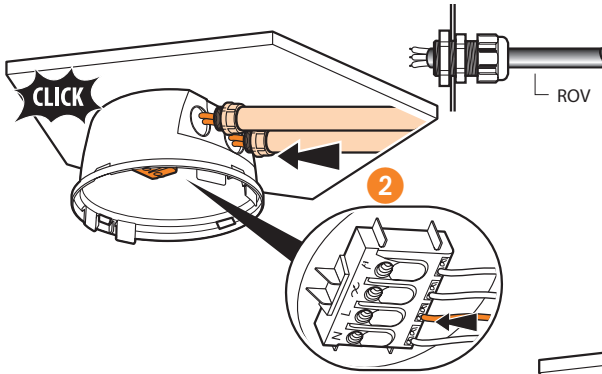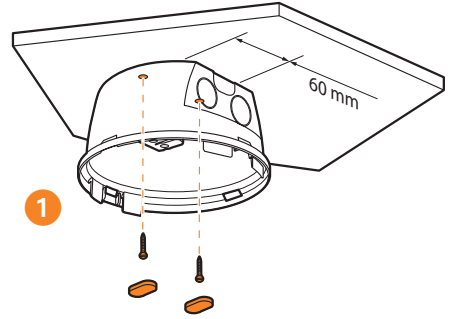

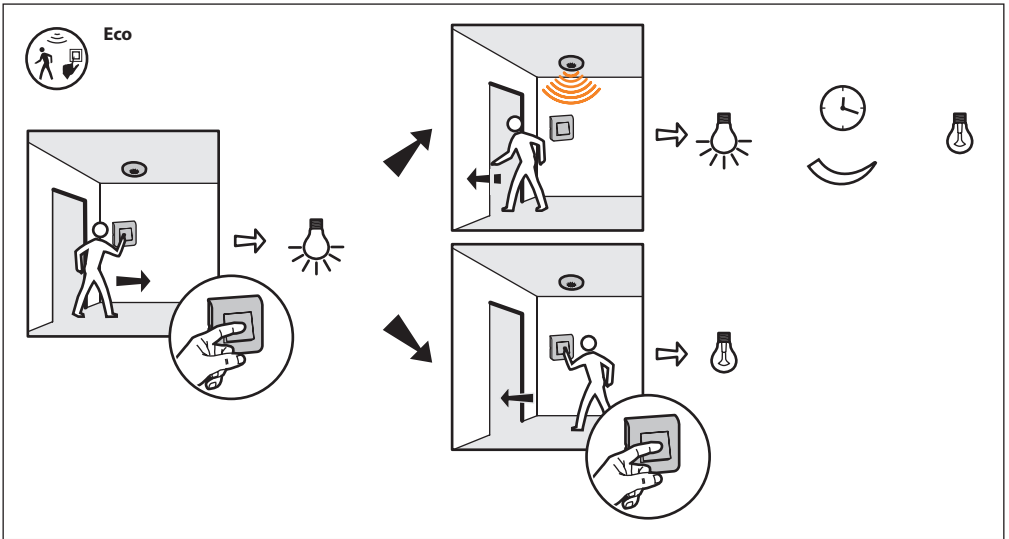IP 66
Non incluso









 Al primo utilizzo: Scaricare l'app Legrand Close Up su Apple Store o Play Store.


 Ref. 0 882 40: Gateway di configurazione
 &
 
 App: «Legrand Close Up»


 App Store
 
 Google Play
 

Per maggiori informazioni sulle impostazioni, consultare la scheda tecnica del gateway di configurazione Ref. 0 882 40.

	5 - 1275 lux
	5 sec - 59 min 59 sec
	25 - 50 - 75 - 100%
Modalità	Auto - Eco - Walkthrough

