


# Ecoline CCT



- Slim, robust economic LED batten suitable for ancillary areas and industrial applications
- Excellent light uniformity through high transmittance polycarbonate diffuser
- Supplied complete with versatile mounting clips. Clips can be located anywhere along the spine of the luminaire
- CCT selector conveniently located under batten end cap
- Selectable CCT between 3000K, 4000K and 6500K
- Pre-wired with 600mm cable
- Non-dimmable

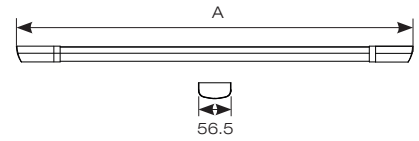

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220/240V	50/60Hz	-20°C to 40°C	L70 50,000	Ra.80	6	120°	2	IP20	IK06

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	A	TRADE
AECOLN/CCT/2	CCT Selectable - 600mm	18W		1990lm (4000K)	110lm (4000K)	690mm	£39.35
AECOLN/CCT/4	CCT Selectable - 1200mm	30W	3000K/4000K/6500K	3910lm (4000K)	130lm (4000K)	1200mm	£51.00
AECOLN/CCT/5	CCT Selectable - 1500mm	35W		4710lm (4000K)	134lm (4000K)	1500mm	£57.00