




Ceiling luminaires
4051859531715
L 340, B 40, H 270

Ceiling mounting
anodised aluminium

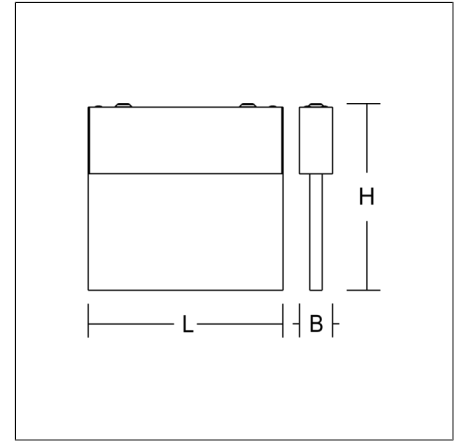

Luminaire for escape route identification. Housing: extruded aluminium profile, anodised or powder-coated. Display panel: highly transparent panel, plastic, with legend on one side/both sides. Driver integrated. Suitable for connection to central battery systems. Please indicate legend number when placing your order!

Product specifications

| | |
|---|--------------------------------|
| Typ of emergency lighting | Central battery system |
| Monitoring | Power circuit |
| Battery | without |
| Operating mode | maintained power mode |
| Viewing Distance | 30 m |
| Length L | 340 mm |
| Width B | 40 mm |
| Height H | 270 mm |
| Weight | 2.01 kg |
| Light source | LED |
| Colour temperature | 4000 K |
| System power, mains operation | 4,8 W |
| System power, emergency operation | 4,8 W |
| Colour rendering index (CRI) | 80 |
| Photobiological safety according to EN 62471 | Risk group 1 |
| Driver | Converter |
| Control | on/off |
| Voltage | 220 - 240 V / 0 Hz, 50 - 60 Hz |
| Luminaires on B10A fuse | 17 |
| Luminaires on B16A fuse | 27 |
| Luminaires on C10A fuse | 28 |
| Luminaires on C16A fuse | 45 |
| Inrush current / Inrush current duration | 27 A / 250 µs |
| Type of protection | IP 40 |
| Protection class | I |
| Filament test | 650°C - 30 seconds |
| Impact resistance | IK03 |
| Ambient temperature for maintained power | 0 °C ... + 25 °C |
| Ambient temperature for non-maintained power mode | 5 °C ... + 40 °C |
| Conformity mark | CE |

Accessories



981647.020
Suspension system



981647.000
Suspension system

HALYXX

671737.004.1 | Luminaires for escape route identification



981702.004
Suspension system



982763.000
Suspension cable set