


# FLAT POLYMERO

312096.002.1 | Ceiling and wall luminaires



Ceiling and wall luminaires  
4051859161486  
D 620, H 160

Ceiling mounting, Wall (surface)  
white

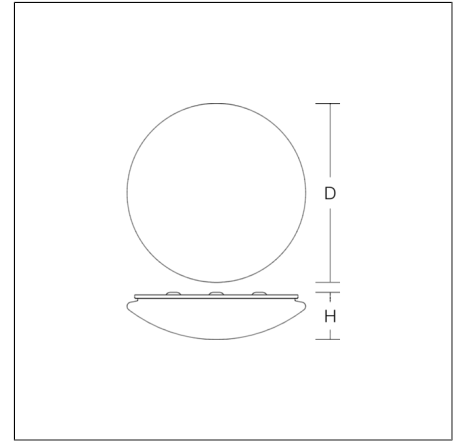


Decorative round surface-mounted luminaire. Base: metal, powder-coated. Diffuser made of non-yellowing plastic (PMMA), opal. Diffuser fastening: patented push system. Suitable for Ceiling mounting, Wall (surface).

## Product specifications

Diameter D	620 mm
Height H	160 mm
Weight	4.02 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	3200 lm
System power	29 W
System efficiency	110 lm/W
Glare evaluation UGR (4H 8H)	18,7
Beam angle	down 120° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	Phase cut-off/cut-on
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	53
Luminaires on B16A fuse	85
Luminaires on C10A fuse	53
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	0.2 A / 10000 µs
CIE Flux Code / CEN Flux Code	40 69 88 85 100
Type of protection	IP 40
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature	25 °C
Conformity mark	CE, EAC

## Spareparts



08-311173.012  
Replacement diffuser