



MASTER TL5 High Output 90 De Luxe



MASTER TL5 HO 90 De Luxe 49W/965 1SL20

This TL5 High Output lamp (tube diameter 16 mm) has excellent color rendering (CRI > 90). This means that colors are presented in a natural way, making them appear rich, deep and enhanced as they do in daylight. Application areas are places where color rendering is key, e.g. the printing industry, libraries, museums, hospitals and shops (jewelry, flowers, clothing, textile, leather, carpets).

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information	
Cap-Base	G5 [G5]
Life to 50% Failures Preheat (Nom)	30000 h
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	99 %
LSF Preheat 8000 h Rated	99 %
LSF Preheat 16000 h Rated	97 %
LSF Preheat 20000 h Rated	84 %
Flux measurement reference	Sphere
Light technical	
Color Code	965 [CCT of 6500K]
Luminous Flux (Nom)	3800 lm
Luminous Flux (Rated) (Nom)	3725 lm

Color Designation	Cool Daylight
Luminous Efficacy (@ Max Lumen, Rated)	85 lm/W
(Nom)	
Chromaticity Coordinate X (Nom)	0.313
Chromaticity Coordinate Y (Nom)	0.337
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	76 lm/W
Color Rendering Index (Nom)	92
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %


Datasheet, 2022, July 28 data subject to change

MASTER TL5 High Output 90 De Luxe

LLMF 20000 h Rated	90 %	
Operating and electrical		
Power (Nom)	49.8 W	
Lamp Current (Nom)	0.255 A	
Temperature		
Design Temperature (Nom)	35 °C	
Controls and dimming		
Dimmable	Yes	
Mechanical and housing		
Bulb Shape	T5 [16 mm (T5)]	
Approval and application		
Energy Efficiency Class	G	

Mercury (Hg) Content (Nom)	1.2 mg
Energy Consumption kWh/1000 h	50 kWh
EPREL Registration Number	423475
Product data	
Full product code	871150086972200
Order product name	MASTER TL5 HO 90 De Luxe 49W/965
	1SL20
EAN/UPC - Product	8711500869722
Order code	927991596524
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	20
Material Nr. (12NC)	927991596524
Copy Net Weight (Piece)	127.400 g
ILCOS Code	FDH-49/65/1A-L/P-G5-16/1450

Dimensional drawing



 Product
 D (max)
 A (max)
 B (max)
 B (min)
 C (max)


 MASTER TL5 HO 90 De
 17 mm
 1449.0 mm
 1456.1 mm
 1453.7 mm
 1463.2 mm

 Luxe 49W/965 ISL20
 1456.1 mm
 1456.1 mm
 1456.1 mm
 1456.1 mm
 1456.1 mm

MASTER TL5 HO 90 De Luxe 49W/965 1SL20

Photometric data

_

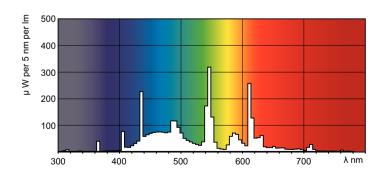



LDPB_TL5-HO9_965-Spectral power distribution B/W

LDPO_TL5-HO9_965-Spectral power distribution Colour

MASTER TL5 High Output 90 De Luxe

Lifetime

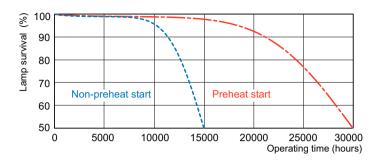

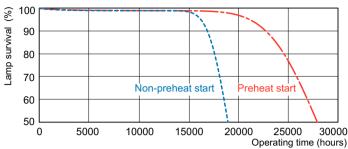

LDLE_TL5-HO9_0001-Life expectancy diagram

LDLE_TL5-HO9_0002-Life expectancy diagram



LDLM_TL5-HO9_0001-Lumen maintenance diagram



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.