


## Gemini CCT Surface/Suspended Linear



- High specification fully enclosed linear luminaire suitable for most commercial and educational applications
- Push pin release design feature ensures a quick and easy installation
- Microprism diffuser for enhanced photometric performance
- Robust steel construction
- Integral switches for multiple wattages and selectable CCT
- CCT selectable between 3000K and 4000K
- Suitable for surface and suspension
- Powered by Philips

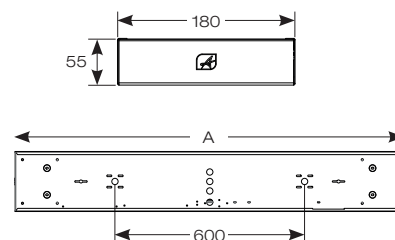

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220-240V	50/60Hz	-20°C to 50°C	L70 54,000	Ra 80	3	90°	1	IP20

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR	A	TRADE
AGELED4	1200mm - CCT Selectable	21/35W	3000K/4000K	2900/4700lm (4000K)	135lm (4000K)	18	1250mm	£195.00
AGELED5	1500mm - CCT Selectable	25/40W	3000K/4000K	3300/5300lm (4000K)	131lm (4000K)	18	1530mm	£213.00

\* UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency	+ £90.00	/DM3	DALI Emergency	+ £205.00
/SM3	Self-Test Emergency	+ £121.00	/DD	Digital Dimming (DD1/DD3/DD4)	+ £95.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
ASK1	Suspension Kit 1.3m	£33.70

